



# BELLART SURFACE

The Moodsetter.

## PRODUCT DESCRIPTION

<b>MOUNTING</b>	SURFACE
<b>LIGHT SOURCE</b>	LED
<b>LIGHT DISTRIBUTION</b>	DIRECT
<b>MATERIALS</b>	ALUMINIUM

Slim and understated or muscular and bold, the tubular BELLART embodies versatility. With its contemporary finish and endless specification options, the BELLART Surface Mounted will make an impact and enhance any residential or commercial interior.

Featuring low to high lumen packages, narrow to wide beam angles and a range of accessories, the BELLART gives interior designers a true freedom.

The BELLART Surface Mounted is ideal as a contemporary accent lighting across many commercial applications. Use it in small meeting pods, above a reception desk, in hotel and retail environment.

## PRODUCT CODE

BELLART SURFACE		
L (mm)	Bellart Surface Ø55	
180mm	LED 6W / 760 lm	33-FZ*-F11-76-9**-*0-*
	LED 9W / 1030 lm	33-FZ*-F11-10-9**-*0-*
260mm	LED 6W / 760 lm	33-FZ*-F21-76-9**-*0-*
	LED 9W / 1030 lm	33-FZ*-F21-10-9**-*0-*

180 mm  
or  
260 mm

Ø 55 mm

\* Luminous Flux taken with 4000K

ACCESSORY	
Honeycombe	33-C5F1
LED 6 / 9W	
<small>* Optical Filters available</small>	

BEAM ANGLE	
20°	33-FZ2-F**-*g**-*0-*
40°	33-FZ4-F**-*g**-*0-*
60°	33-FZ6-F**-*g**-*0-*

COLOUR TEMPERATURE	
3000K	33-FZ*-F**-*g**-*930-*0-*
4000K	33-FZ*-F**-*g**-*940-*0-*

CONTROL		
NON DIM	EDGE CUT DIM	NON DIM 33-FZ*-F**-*g**-*K0-*
		ECUT DIM 33-FZ*-F**-*g**-*P0-*
		DALI DIM B. 33-FZ*-F**-*g**-*M0-*
DALI DIM BLUETOOTH		

FINISH		
WHITE	BLACK	WHITE 33-FZ*-F**-*g**-*0-C
		BLACK 33-FZ*-F**-*g**-*0-D
		COPPER 33-FZ*-F**-*g**-*0-H
		GRAPHITE 33-FZ*-F**-*g**-*0-G
		GOLD 33-FZ*-F**-*g**-*0-F
		GREY 33-FZ*-F**-*g**-*0-B
COPPER	GRAPHITE	
GOLD	GREY	

\* Front ring is supplied in black for the following: Copper, Gold and Graphite





# BELLART SURFACE

The Moodsetter.

## PRODUCT DESCRIPTION

<b>MOUNTING</b>	SURFACE
<b>LIGHT SOURCE</b>	LED
<b>LIGHT DISTRIBUTION</b>	DIRECT
<b>MATERIALS</b>	ALUMINIUM

Slim and understated or muscular and bold, the tubular BELLART embodies versatility. With its contemporary finish and endless specification options, the BELLART Surface Mounted will make an impact and enhance any residential or commercial interior.

Featuring low to high lumen packages, narrow to wide beam angles and a range of accessories, the BELLART gives interior designers a true freedom.

The BELLART Surface Mounted is ideal as a contemporary accent lighting across many commercial applications. Use it in small meeting pods, above a reception desk, in hotel and retail environment.

## PRODUCT CODE

BELLART SURFACE														
L (mm)	Bellart Surface Ø90													
260mm	<table border="0"> <tr><td>LED</td><td>12W / 1500 lm</td><td><b>33-FZ*-F22-15-***-0-*</b></td></tr> <tr><td>LED</td><td>17.5W / 2000 lm</td><td><b>33-FZ*-F22-20-***-0-*</b></td></tr> <tr><td>LED</td><td>25W / 3000 lm</td><td><b>33-FZ*-F22-30-***-0-*</b></td></tr> </table>	LED	12W / 1500 lm	<b>33-FZ*-F22-15-***-0-*</b>	LED	17.5W / 2000 lm	<b>33-FZ*-F22-20-***-0-*</b>	LED	25W / 3000 lm	<b>33-FZ*-F22-30-***-0-*</b>				
LED	12W / 1500 lm	<b>33-FZ*-F22-15-***-0-*</b>												
LED	17.5W / 2000 lm	<b>33-FZ*-F22-20-***-0-*</b>												
LED	25W / 3000 lm	<b>33-FZ*-F22-30-***-0-*</b>												
350mm	<table border="0"> <tr><td>LED</td><td>12W / 1500 lm</td><td><b>33-FZ*-F32-15-***-0-*</b></td></tr> <tr><td>LED</td><td>17.5W / 2000 lm</td><td><b>33-FZ*-F32-20-***-0-*</b></td></tr> <tr><td>LED</td><td>25W / 3000 lm</td><td><b>33-FZ*-F32-30-***-0-*</b></td></tr> <tr><td>LED</td><td>33W / 4000 lm</td><td><b>33-FZ*-F32-40-***-0-*</b></td></tr> </table>	LED	12W / 1500 lm	<b>33-FZ*-F32-15-***-0-*</b>	LED	17.5W / 2000 lm	<b>33-FZ*-F32-20-***-0-*</b>	LED	25W / 3000 lm	<b>33-FZ*-F32-30-***-0-*</b>	LED	33W / 4000 lm	<b>33-FZ*-F32-40-***-0-*</b>	
LED	12W / 1500 lm	<b>33-FZ*-F32-15-***-0-*</b>												
LED	17.5W / 2000 lm	<b>33-FZ*-F32-20-***-0-*</b>												
LED	25W / 3000 lm	<b>33-FZ*-F32-30-***-0-*</b>												
LED	33W / 4000 lm	<b>33-FZ*-F32-40-***-0-*</b>												

\* Luminous Flux taken with 4000K

ACCESSORY	
Honeycombe	<b>33-C5F2</b>
LED 6 / 9W	

\* Optical Filters available

BEAM ANGLE	
15°	<b>33-FZ1-F**.*-***-0-*</b>
36°	<b>33-FZ3-F**.*-***-0-*</b>
60°	<b>33-FZ6-F**.*-***-0-*</b>

CRI	
90	<b>33-FZ*-F**.*-G**-*0-*</b>
80	<b>33-FZ*-F**.*-G**-*0-*</b>

COLOUR TEMPERATURE	
3000K	<b>33-FZ*-F**.*-30-*0-*</b>
4000K	<b>33-FZ*-F**.*-40-*0-*</b>

CONTROL	
NON DIM	<b>33-FZ*-F**.*-***-K0-*</b>
DALI DIM	<b>33-FZ*-F**.*-***-J0-*</b>
DALI DIM B.	<b>33-FZ*-F**.*-***-M0-*</b>
DALI DIM BLUETOOTH	

FINISH	
WHITE	<b>33-FZ*-F**.*-***-0-C</b>
BLACK	<b>33-FZ*-F**.*-***-0-D</b>
COPPER	<b>33-FZ*-F**.*-***-0-H</b>
GRAPHITE	<b>33-FZ*-F**.*-***-0-G</b>
GOLD	<b>33-FZ*-F**.*-***-0-F</b>
GREY	<b>33-FZ*-F**.*-***-0-B</b>

\* Front ring is supplied in black for the following: Copper, Gold and Graphite





# BELLART SURFACE

The Moodsetter.

## PRODUCT DESCRIPTION

<b>MOUNTING</b>	SURFACE
<b>LIGHT SOURCE</b>	LED
<b>LIGHT DISTRIBUTION</b>	DIRECT
<b>MATERIALS</b>	ALUMINIUM

Slim and understated or muscular and bold, the tubular BELLART embodies versatility. With its contemporary finish and endless specification options, the BELLART Surface Mounted will make an impact and enhance any residential or commercial interior.


Featuring low to high lumen packages, narrow to wide beam angles and a range of accessories, the BELLART gives interior designers a true freedom.

The BELLART Surface Mounted is ideal as a contemporary accent lighting across many commercial applications. Use it in small meeting pods, above a reception desk, in hotel and retail environment.

## PRODUCT CODE

BELLART SURFACE		
L (mm)	Bellart Surface Ø120	
180mm	LED 12W / 1500 lm	33-FZ*-F13-15-***-0-*
	LED 17.5W / 2000 lm	33-FZ*-F13-20-***-0-*
350mm	LED 12W / 1500 lm	33-FZ*-F33-15-***-0-*
	LED 17.5W / 2000 lm	33-FZ*-F33-20-***-0-*
	LED 25W / 3000 lm	33-FZ*-F33-30-***-0-*
	LED 33W / 4000 lm	33-FZ*-F33-40-***-0-*
500mm	LED 12W / 1500 lm	33-FZ*-F53-15-***-0-*
	LED 17.5W / 2000 lm	33-FZ*-F53-20-***-0-*
	LED 25W / 3000 lm	33-FZ*-F53-30-***-0-*
	LED 33W / 4000 lm	33-FZ*-F53-40-***-0-*
	LED 37W / 5000 lm	33-FZ*-F53-50-8***-0-*

\* Luminous Flux taken with 4000K

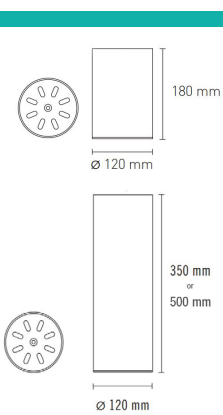

BEAM ANGLE		
15°	36°	15° 33-FZ1-F**.*-***-0-*
		36° 33-FZ3-F**.*-***-0-*
		60° 33-FZ6-F**.*-***-0-*

CRI		
90	80	90 33-FZ*-F**.*-G**.*-0-*
		80 33-FZ*-F**.*-G**.*-0-*

COLOUR TEMPERATURE		
3000K	4000K	3000K 33-FZ*-F**.*-30-0-*
		4000K 33-FZ*-F**.*-40-0-*

CONTROL		
NON DIM	DALI DIM	NON DIM 33-FZ*-F**.*-***-K0-*
		DALI DIM 33-FZ*-F**.*-***-J0-*
		DALI DIM B. 33-FZ*-F**.*-***-M0-*
DALI DIM BLUETOOTH		

FINISH		
WHITE	BLACK	WHITE 33-FZ*-F**.*-***-0-C
		BLACK 33-FZ*-F**.*-***-0-D
		COPPER 33-FZ*-F**.*-***-0-H
		GRAPHITE 33-FZ*-F**.*-***-0-G
		GOLD 33-FZ*-F**.*-***-0-F
		GREY 33-FZ*-F**.*-***-0-B
COPPER	GRAPHITE	
GOLD	GREY	

\* Front ring is supplied in black for the following: Copper, Gold and Graphite

ACCESSORY	
Honeycombe	
LED 6 / 9W	33-C5F3

\* Optical Filters available

