


Installation Cont.

4

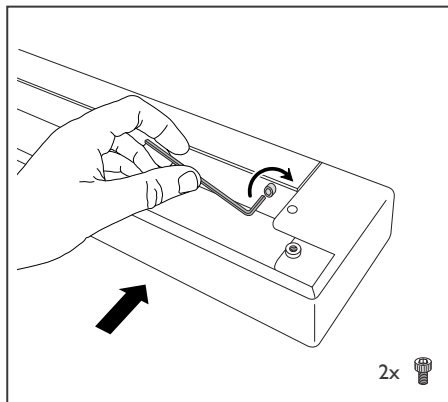

Wiring

	WHITE	- Used for dimming systems, see notes below
	RED	- Used for dimming systems, see notes below
N	BLUE	- Neutral
E	GREEN/YELLOW	- Earth
L1	BROWN	- Live
L2	BLACK	- Live (Emergency Unswitched)

The **WHITE** and **RED** terminals should be used as follows:

Digital Dimming (Gear types: F, G and V)

WHITE - DSI Signal **RED** - DSI Signal

DALI Dimming (Gear types: C, S, T and U)

WHITE - DALI Signal **RED** - DALI Signal

Analogue 1-10V Dimming (Gear types: H, I and W)

WHITE - Negative (-) **RED** - Positive (+)


Switch Dimming (Gear types: J, K and Y)

WHITE - Not used **RED** - Live (Dimming Switched)

NB: For Link systems the integral wiring harness should be used for continuous wiring. Adjoining luminaires should be bolted together using fixings supplied.


Wiring Cont.

1

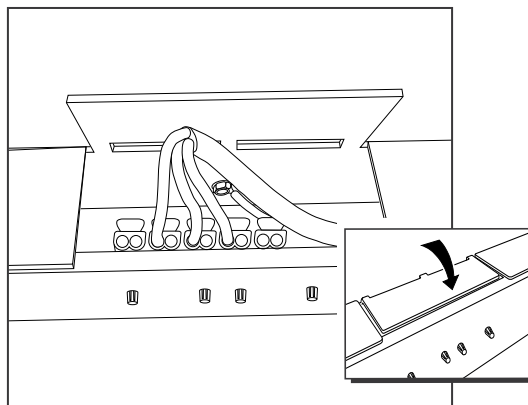


Lamp installation

1

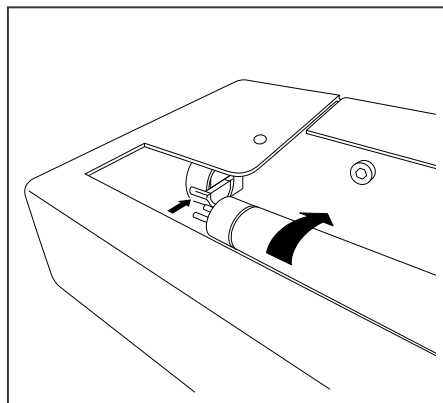

2

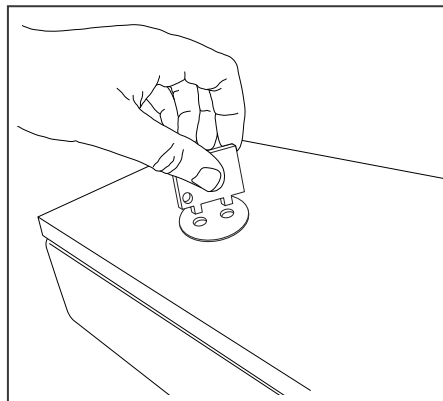

IMPORTANT INFORMATION

Linaj 981/977/Link



Disconnect electricity supply before installation.

To be installed by qualified personnel only.

When installing, Hacel recommends wearing disposable gloves to avoid fingerprinting to the paint work of the luminaire.

Read leaflet fully before installation.

Lamps should be installed and used within the lamp manufacturers guidelines.

Hacel[®]
Fluent in Lighting

THE SILVERLINK, WALLSEND, NEWCASTLE UPON TYNE,
TYNE & WEAR, NE28 9ND

TECHNICAL: (0191) **280 9914**

FAX:: (0191) **263 0946**


E-MAIL: technical@hacel.co.uk

WEB: www.hacel.co.uk

09/2015 79_0133


Preparation (WL981)

1

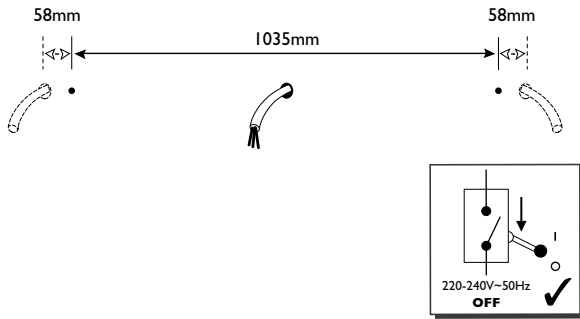


Preparation Cont.

2

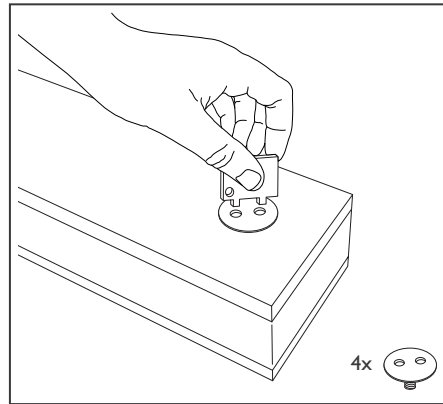


Preparation (WL977)

1

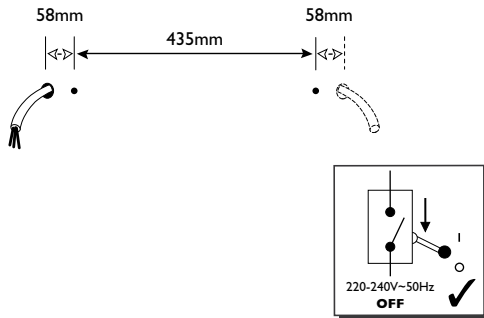


3

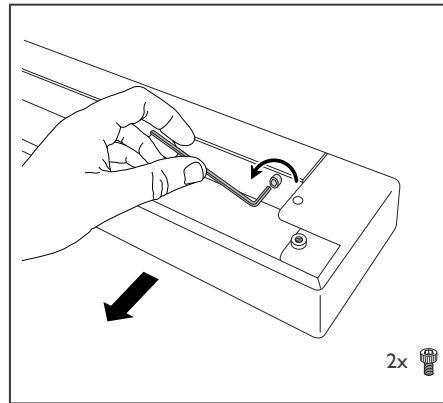


Preparation (WL945/WL946/WL947)

1

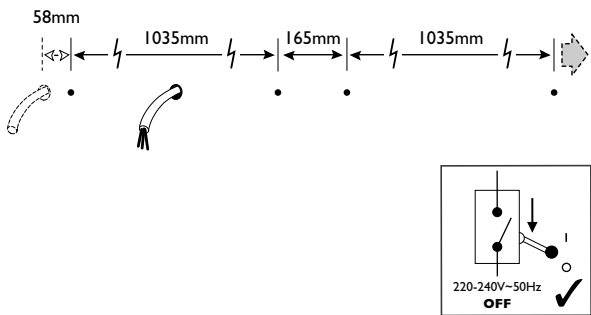


4

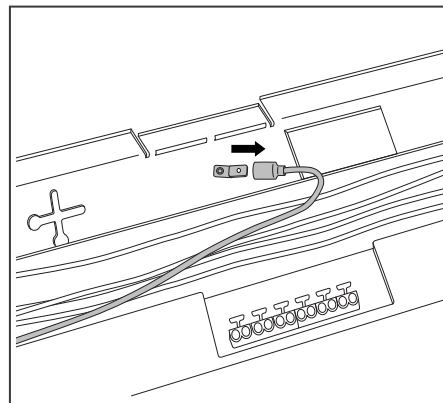


Installation

1

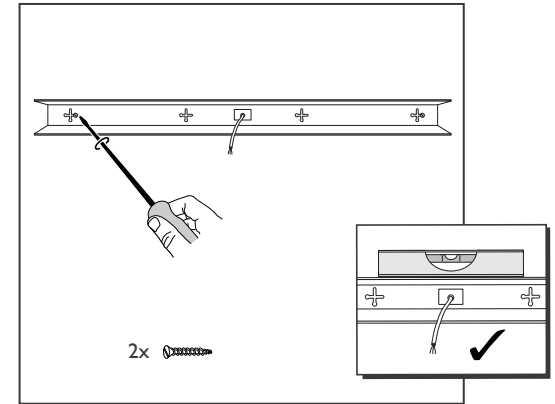

2

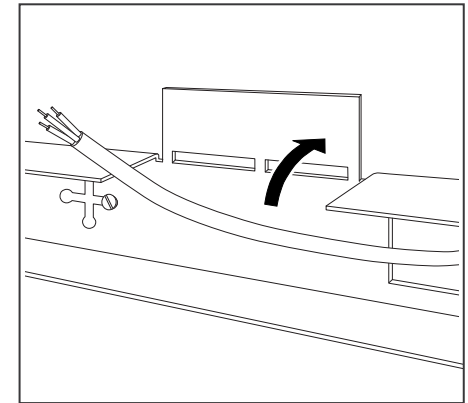

3

