

Description:

Back lit emergency exit sign.
Acrylic legend panel with clear polished edges (order separately).
Recessed wall mounted.

Standards:

- EN60598-2-22
- EN55015
- EN50082-1
- EN60555-2
- CE marked

Specification:

Total Weight: 2.0Kg.

Voltage / Current: Dependent upon gear: See Table 'AA'.

Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting.
Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.

Autotest Versions: Stand alone automatic testing in accordance with IEC62034.

Operating Temp: Min 0oC / Max 25oC.

IP Rating: IP20.

**Part Numbers Explained:**

1880250FW-AA

Where:-

'AA' designates the lamp & gear type.
See Table 'AA' for options & codes.

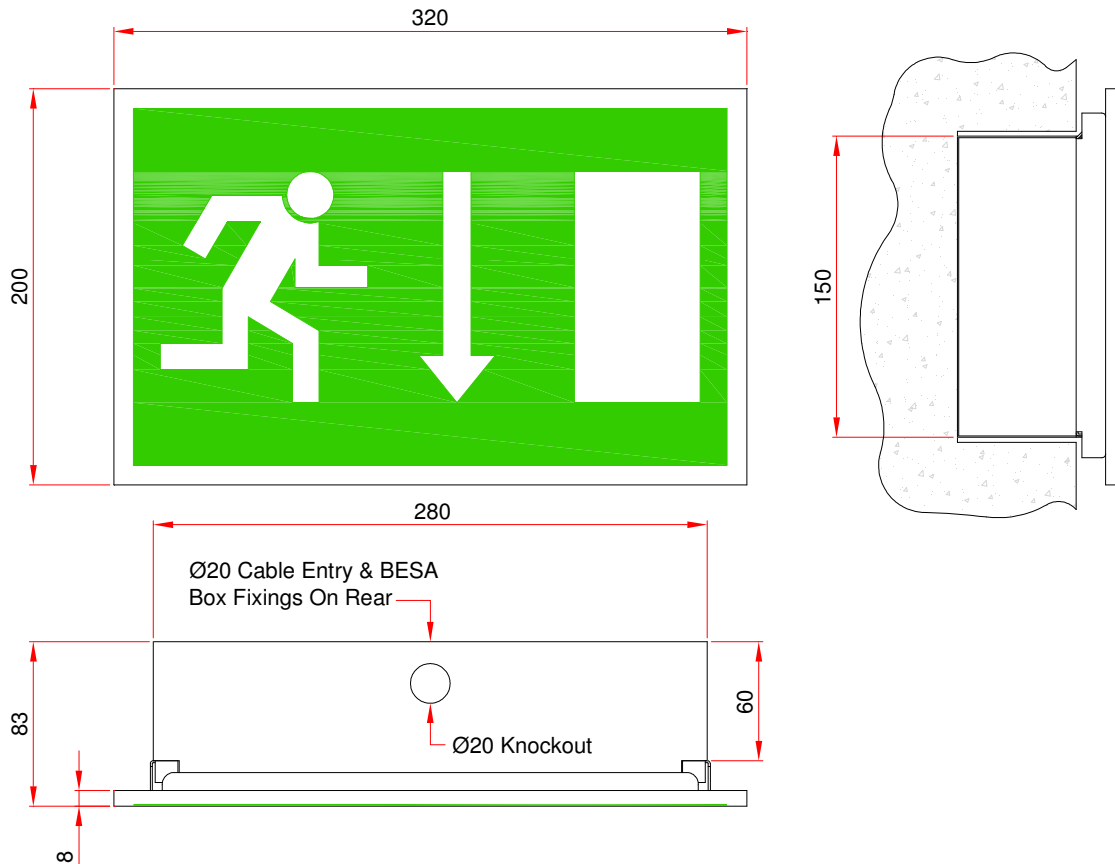


Table 'AA': Gear / Operation

'AA' Codes	Lamp	Gear / Operation**	Supply Current*
HF	6W T5	220-240V DC/AC 50/60Hz HF ballast for use with central battery / static inverter.	<100mA
IV	6W T5	24V, 50V or 110V AC/DC inverter for use with central battery / static inverter. Required voltage to be stated on order.	<850mA
MM	6W T5	230V AC \pm 10% 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
NM	6W T5	230V AC \pm 10% 50/60Hz emergency module with self contained 3 hour NiCad battery pack. Non-maintained operation only.	<100mA
NS	6W T5 x 2	1 emergency lamp via 230V AC \pm 10% 50/60Hz non-maintained emergency module with self contained 3 hour NiCad battery pack. 1 lamp maintained via 220-240V DC/AC 50/60Hz HF ballast.	<200mA
TF	6W T5 x 2	220-240V DC/AC 50/60Hz HF ballast x 2 separately switched. For use with mains supply and central battery / static inverter.	<200mA
YM	6W T5	230V AC \pm 10% 50/60Hz Autotest emergency module with self contained 3 hour NiCad battery pack. Maintained via 220-240V AC 50/60Hz HF ballast.	<200mA
YN	6W T5	230V AC \pm 10% 50/60Hz Autotest emergency module with self contained 3 hour NiCad battery pack. Non-maintained operation only.	<100mA
DL	1W LED strip	220-240V AC 50/60 Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
LA	1W LED strip	220-240V DC/AC 50/60 Hz LED driver for use with central battery / static inverter.	<100mA
LR	1W LED strip	93-256V DC/AC 50Hz LED driver with 230V AC \pm 10% 50Hz hold off relay for use with central battery / static inverter.	<100mA
LM	1W LED strip	220-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
YL	1W LED strip	220-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA

*Supply current during normal luminaire operation, after inrush current on start up.

**Other gear may also be available. Details on request.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077

1880250FW_RANGE_2