

Description:

Edge lit emergency exit sign c/w remote gearbox.
Acrylic legend panel with clear polished edges (order separately).
Semi-recessed ceiling mounted.

Standards:

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- CE marked

Specification:

Total Weight: 3.0 Kg.

Voltage / Current: Dependent upon gear: See Table 'AA'.

Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.

Autotest Versions: Stand alone automatic testing in accordance with IEC62034.

Operating Temp: Min 0°C / Max 25°C.

IP Rating: IP20.



Part Numbers Explained:

7150 - AA - B

Where:-

'AA' designates the lamp & gear type.
See Table 'AA' for options & codes.

'B' designates the trim finish.
See Table 'B' for options & codes.

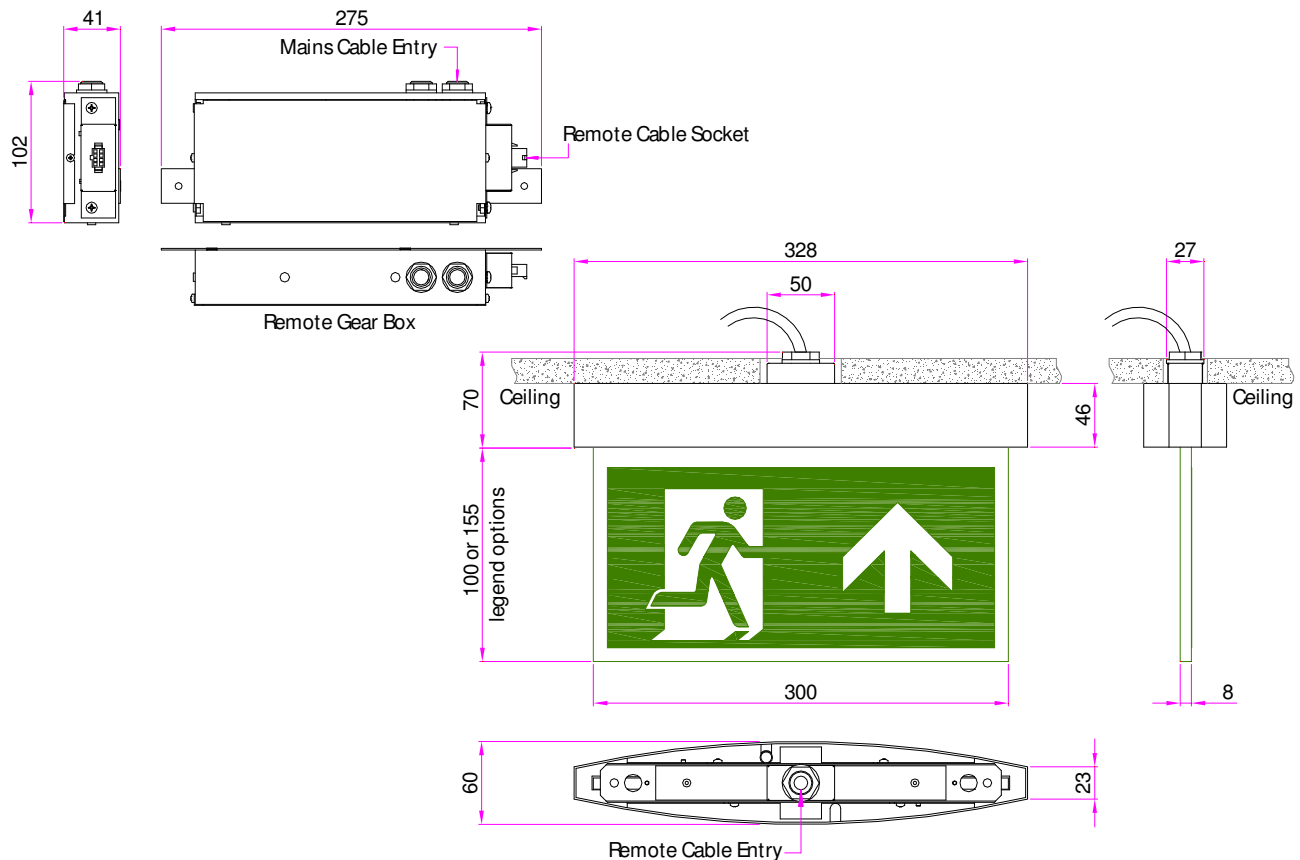


Table 'AA': Gear / Operation

'AA' Codes	Lamp	Gear / Operation	Supply Current*
HF	6W T ₅	220-240V DC/AC 50/60Hz HF ballast for use with central battery / static inverter.	<100mA
IV ₂₄	6W T ₅	24V AC/DC inverter for use with central battery / static inverter.	<800mA
IV ₅₀	6W T ₅	50V AC/DC inverter for use with central battery / static inverter.	<500mA
IV ₁₁₀	6W T ₅	110V AC/DC inverter for use with central battery / static inverter.	<300mA
MM	6W T ₅	230V AC ± 10% 50/60Hz emergency module with self-contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
NM	6W T ₅	230V AC ± 10% 50/60Hz emergency module with self-contained 3 hour NiCad battery pack. Non-maintained operation only.	<100mA
YM	6W T ₅	230V AC ± 10% 50/60Hz Autotest emergency module with self-contained 3 hour NiCad battery pack. Maintained via 220-240V AC 50/60Hz HF ballast.	<200mA
YN	6W T ₅	230V AC ± 10% 50/60Hz Autotest emergency module with self-contained 3 hour NiCad battery pack. Non-maintained operation only.	<100mA
DL	LED strip	220-240V AC 50/60 Hz emergency module with DALI interface & self-contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
DA	LED strip	220-240V DC/AC 50/60 Hz LED driver with DALI interface for use with central battery / static inverter.	<100mA
LA	LED strip	220-240V DC/AC 50/60 Hz LED driver for use with central battery / static inverter.	<100mA
LM	LED strip	220-240V AC 50/60Hz emergency module with self-contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
LR	LED strip	93-256V DC/AC 50Hz LED driver with 230V AC ± 10% 50Hz hold off relay for use with central battery / static inverter.	<100mA
LV	LED strip	9-24V DC LED driver for use with central battery.	<400mA
PL	LED strip	230V AC ± 10% 50/60Hz emergency module with 2 x normally closed potential free contacts & self-contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
YL	LED strip	220-240V AC 50/60Hz Autotest emergency module with self-contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA

*Supply current during normal luminaire operation, after inrush current on start up.

Table 'B': Finish Options

'B' Codes	Finish	'B' Codes	Finish
B	Brass. Polished & lacquered.	R	Satin chrome.
C	Polished chrome.	V	Old penny bronze.
D	Brass made antique.	W	White RAL9010.
G	Grey RAL9006.	Z	Special finish: customer specification.
K	Black RAL9005.		

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384

Fax: 0121 711 2469

e-mail: mail@philippayne.co.uk

Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077

7150_RANGE_2