

# COMEPS

Whitecroft  
lighting

# DALI TEST

## Application

Low profile emergency lighting module with DALI interface and automatic testing facility to cover 3 hour duration operating from batteries.

DALI interface terminals are provided to allow control and monitoring via a separate controller. With no DALI bus connected the unit operates in Self test mode with testing being conducted on a weekly functional and 13 week duration basis with adaptive duration testing feature to minimise risk.

Fitted with the unique easy addressing feature which uses the LED to indicate the DALI address during commissioning.

## Monitoring

DALI interface for controlled monitoring and reporting.

During operation the battery, lamp and charge conditions are monitored along with functional and duration testing.

In the event of failure the bi-coloured LED will indicate the nature of the fault. This it will continue to do until the fault has been remedied. The testing regime will then continue.

## TESTING

When a DALI bus is not connected or when a command has not been received the COMECS will operate in the self testing mode and will conduct tests in accordance with the default times stored in the EEPROM. However it should be noted that in this case the delay time is set as default zero and all units could test at the same time. Test times can be changed with a command over the DALI bus.

## Addressing

The COMECS includes the easy addressing system which allows addressing and identification by using the bi-colour LED in conjunction with the COMECS ADDRESS tool. Binary address codes given by the LED can be simply converted to the DALI addresses 0 to 63. For single handed addressing using this method it is necessary to send a broadcast ident command every 3 to 9 seconds. During this command the main fluorescent lamp will be switched off and the LED will flash the 6 bit binary address preceded by a 3 second start indication period.

## Functional test

The time of day and frequency of the 30 seconds function test can be set by the DALI controller. If the COMECS unit is not connected to a DALI bus or has not received a DALI command the test will default to 30 seconds duration on a weekly basis.

## Duration test

Test times can be set by the DALI controller. If the COMECS unit is not connected to a DALI bus or has not received a DALI command the test will be conducted every 13 weeks.

## Prolong time

Prolong time can be set by the DALI controller. This is the delay time between return of the mains supply and the end of the emergency operation. The default prolong time is set as 0 minutes as specified within the DALI standard.

## Test switch


An optional test switch can be wired to each COMECS. This can be used to initiate a 30 seconds function test by a short press < 1 second .

## Battery

Recommended charge time is min. 15h. Battery should be fully charged before any emergency tests are performed.

## DALI LUMINAIRES CONNECTIONS

**N.B. IT IS IMPERATIVE TO ADD THE LINKS SHOWN BELOW IF USING DALI DIMMING AND EMERGENCY TEST ON THE SAME ADDRESSABLE CONTROL CIRCUIT**

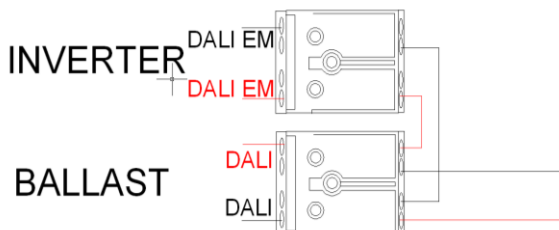

If in doubt please contact our Technical Support  
(details on reverse page)

See reverse page for LED Status indicators



PK/LFTCOMECS

Sept 2014 - Rev A

**Whitecroft Lighting Limited**

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX  
Telephone +44 (0)870 5 087 087 Facsimile: +44 (0)870 5 084 210

Registered No. 3848973 England

Registered Office: AS above

## STATUS INDICATION – TRIDONIC INVERTER

LED	STATUS
Permanent green	System OK
Fast flashing green	Functional test underway
Slow flashing green	Commissioning/Duration test underway
Permanent red	Lamp fault
Fast flashing red	Charging fault
Slow flashing red	Battery fault
Double pulsing green	Inhibit mode
Off	Loss of mains/battery supply

## STATUS INDICATION – ELP INVERTER

LED	STATUS
Permanent green	System OK
Fast flashing green	Functional test underway
Slow flashing green	Commissioning/Duration test underway
Permanent red	Lamp/LED fault
Fast flashing red	Charging fault
Slow flashing red	Battery fault
Double pulsing green	Inhibit mode
Green with double off pulse	Rest mode
Alternate green/red flash	Identification Mode
Off	Loss of mains/battery supply

## STATUS INDICATION – MACKWELL INVERTER

LED	STATUS
Permanent green	System OK
Fast flashing green	Functional test underway
Slow flashing green	Commissioning/Duration test underway
10 second green blink	Standby mode
Fast flashing red	Lamp/LED fault
Slow flashing red	Battery/Charging fault
Off	Loss of mains/battery supply

### TECHNICAL SUPPORT

Telephone: 0161 331 5700

E-mail: [technical@whitecroftlight.com](mailto:technical@whitecroftlight.com)

<http://www.whitecroftlighting.com>