


Membrane sealed by cladding contractor to Paraflex. Any membrane sealed direct to Paraflex must be checked for compatibility by the cladding contractor.

Timber upstand to main contractors specification.



- 1. Timber deck
- 2. Self adhesive vapour barrier.
- 3. Tapered or uniform polyurethane insulation adhered to base with Radmat adhesive layer.
 - > Self adhesive foil to all board joints.
- 4. Paraflex System
 - > Paraflex universal primer
 - > Hand cast kiln dried sand
 - > Paraflex FD 1.5 mm initial coat
 - > Radmat 165Kg reinforcement layer
 - > Paraflex FD 0.8mm top coat

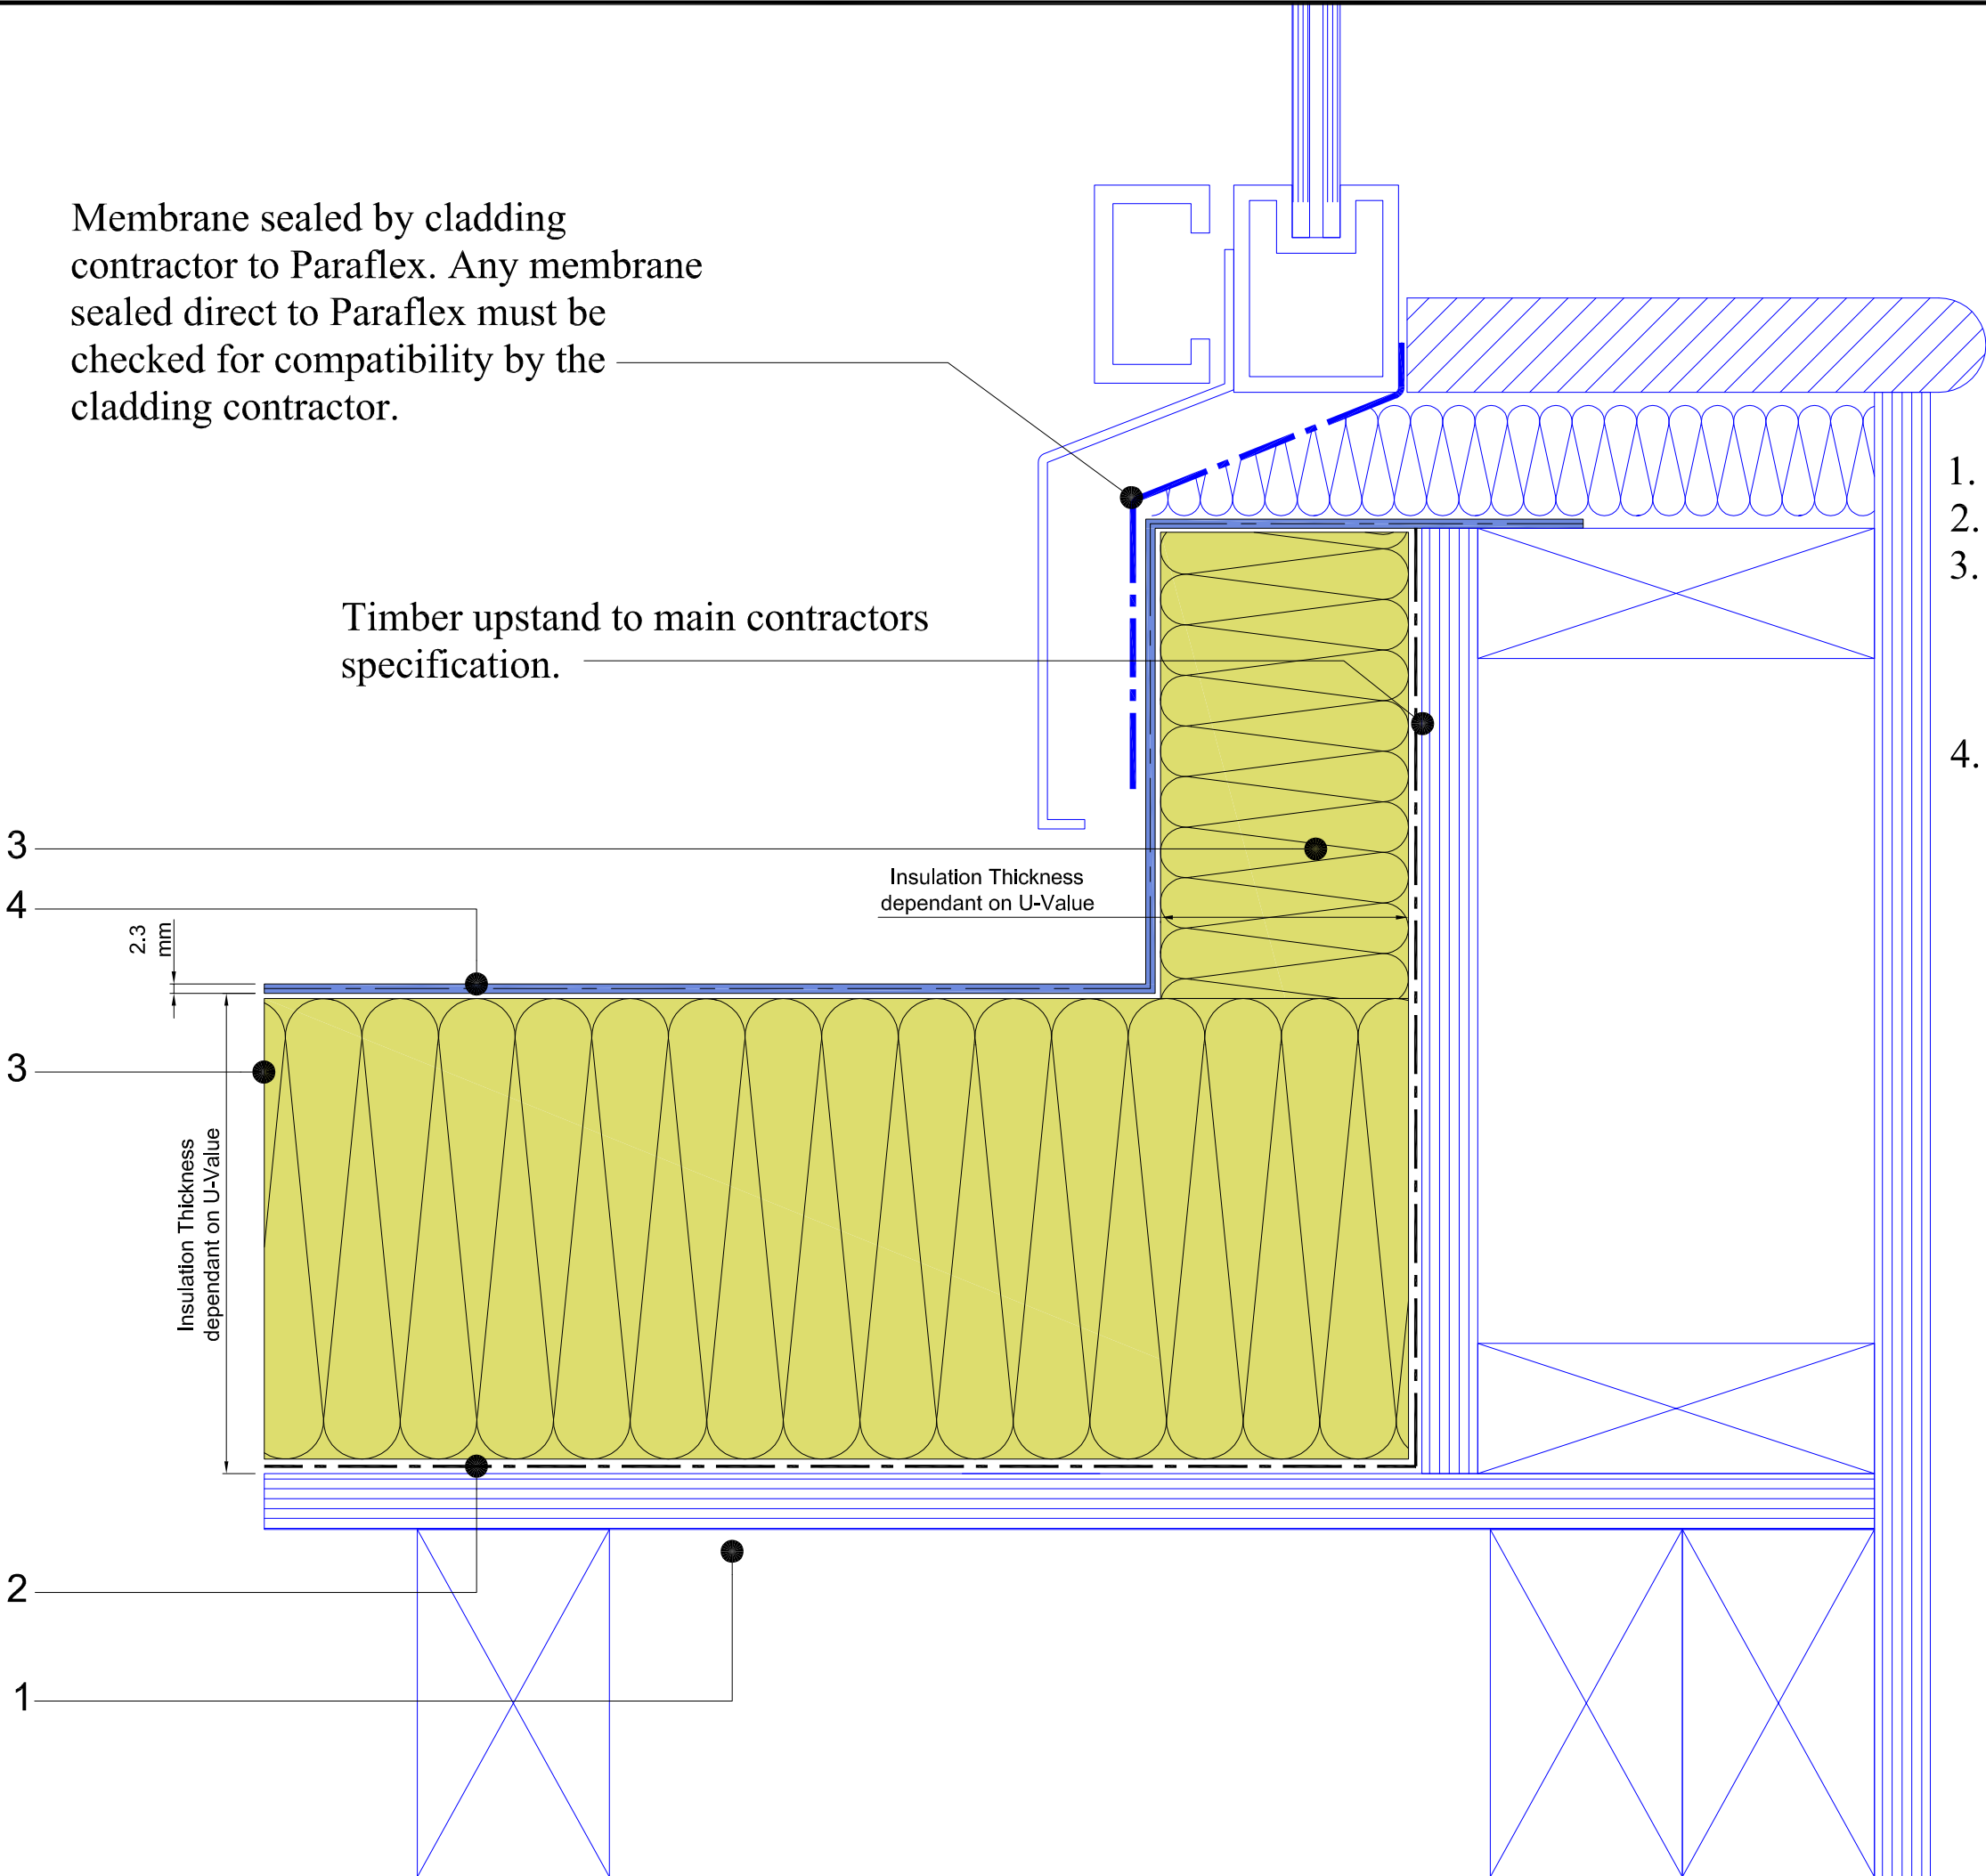

TITLE	
WARM ROOF PARAFLEX TIMBER DECK UPSTAND DETAIL	
DATE:	Aug ' 09
SCALE N.T.S.	
DRAWING NUMBER	
RAD-PAR-208	