


# Wraptite-FZ

AIRTIGHTNESS

## WHY CHOOSE WRAPTITE-FZ?

Wraptite-FZ is a vapour permeable air barrier membrane for use at floor junctions. It is durable, flexible and lightweight, and offers temporary protection against wind driven rain, snow and dust and is supplied in 750mm roll widths for easy site handling. Wraptite-FZ conforms to the Construction Products Directive and is manufactured under control of an ISO9001 quality management system.

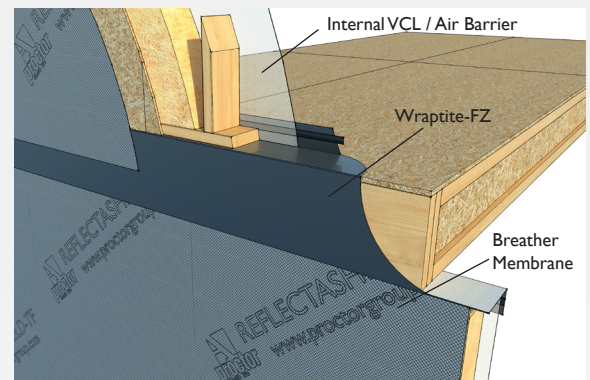

Cassette Floor Junction

## PRODUCT CHARACTERISTICS

PROPERTY	TEST/STANDARD	RESULT	
Roll size		750mm x 50m	
Product Code		FNS 165	
Mass per unit area	EN 1849-2	165/m <sup>2</sup> (+/- 10 g/m <sup>2</sup> )	
Reaction to fire	EN 13501-1	Class D, d2*	
Water vapour resistance Sd	EN 12572	0.029 m (+/-0.01)	
Water penetration	EN 1928 Before ageing: After ageing:	Class W I Class W I	
Tensile strength	EN 12311-1 Before ageing: After ageing:	MD 320 N (-80 N) MD 270 N (-80 N)	CD 210 N (-50 N) CD 170 N (-50 N)
Elongation	EN 12311-1 Before ageing: After ageing:	MD 85% (-35%) MD ≥50%	CD 100% (-30%) CD ≥50%
Tear resistance	EN 12310-1	MD 200 N (-50 N)	CD 190 N (-50 N)
Flexibility at low temperature	EN 1109	No cracking at minus 60°C	

\*When tested to EN 11925-2



Download a full Wraptite  
brochure from our website...

[www.proctorgroup.com](http://www.proctorgroup.com)

wraptite@proctorgroup.com | +44 (0) 1250 872261

Revised September 2015

