

SDS Eaves Access Panel - Fire Rated

SDS Fire Rated Eaves Access



*SINGLE/TWIN TRI-DRIVE LOCKS



MADE IN THE UK



1 HOUR FIRE RATED



SOUND PROOF




SMOKE TESTED



PART-L

- 1-Hour Fire Rated tested to B.S.476: Part 22:1987 face side only
- Superb acoustic reduction of 36dB tested to BS EN 50 1040-2
- 600×600mm Smoke Tested to BS EN 1634-3:2004
- Part-L compliant to a U-Value of 0.35 W/M²k
- Designed to maintain insulation and draught proofing
- Constructed from Zintec steel & powder-coated RAL9016
- Insulated with 50mm mineral wool
- Draught seals fitted between the door & frame

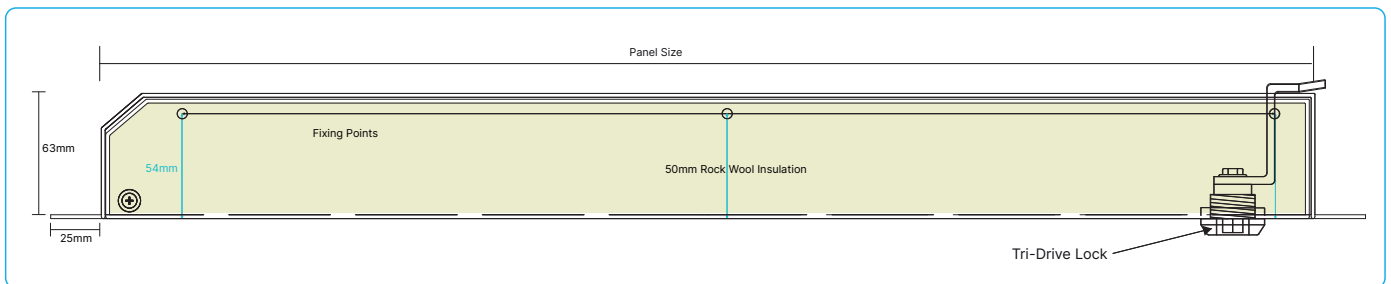

CODE	STRUCTURAL OPENING (TO BE LINED)	CLEAR OPENING ONCE INSTALLED	OVERALL SIZE INCLUDING FRAME	DEPTH
SDS-EAVES-DOOR-530X530	555×555mm	505×455mm	580×580mm	63mm
SDS-EAVES-DOOR-900X530*	925×555mm	875×455mm	950×580mm	63mm
SDS-EAVES-DOOR-600X600	625×625mm	575×525mm	650×650mm	63mm
SDS-EAVES-DOOR-900X600*	925×625mm	875×525mm	950×650mm	63mm
SDS-EAVES-DOOR-900X750*	925×775mm	875×675mm	950×800mm	63mm

* Hinged on the Long Side & fitted With 2 x Tri-Drive Locks

NOTES: