
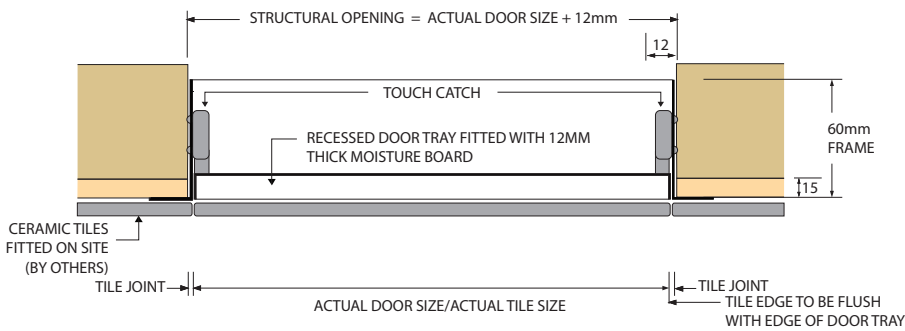


**APD.CTD/B1**
**BUDGET WALL ACCESS PANEL - CERAMIC TILE FACED DOOR**


## SPECIFICATION

DESCRIPTION	Tile Faced Wall Access Panel.
FIRE RATING	Non Fire - Rated, made from wholly non-combustible materials. in accordance with BS476 Part 4.
HINGE TYPE	Removable Door.
COMPOSITION	1.0mm Thick Zintec Steel. Door Face lined with 12.5 mm Moisture Resistant Plasterboard. Polyester Powder Coated in matt white RAL 9010 20% gloss.
LOCKING	Budget Lock ( Standard ), Touch Catch
FITTING	Screw fix through the frame into a suitable trimming.
HIGH HUMIDITY	For areas of high humidity for instance: swimming pools specify Stainless Steel with the following reference APD.CTD.SS

## LOCKING OPTIONS

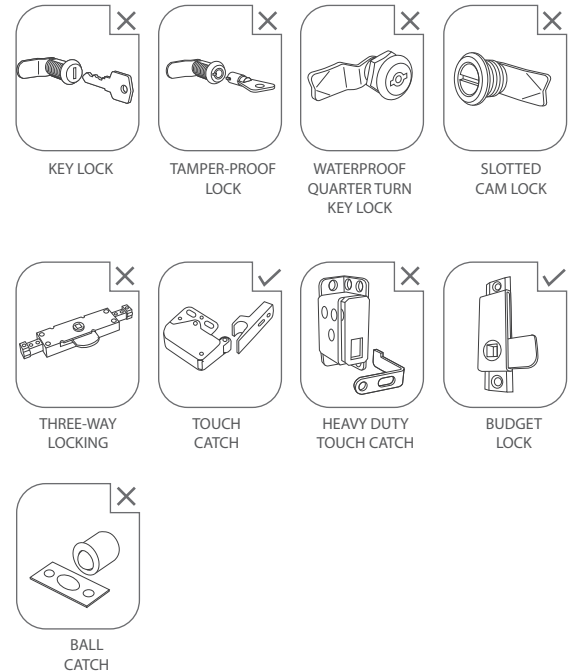

## DIMENSIONS

Various sizes can be manufactured up to approximately 600 x 600 depending upon the actual size of the tile to be fitted to the door tray on site. For larger sizes refer to access panel type APD.CTD

## FITTING INSTRUCTIONS

Note: the access panel may require extra support and bracing to allow safe operation.

- Insert frame into structural opening which needs to be 5mm larger than panel size, ensuring frame is flush with surface. Then screw fix through fixing points. Additional packers may be needed to prevent distortion of the frame. DO NOT fix through the face of frame.
- Simple to operate: remove the plastic plug, insert the Key into the budget lock and rotate 90 degrees. Ensure there is sufficient clearance for the lock to operate correctly.
- Access Panels with a beaded frame are designed for a wet finish. Scrim tape must be applied to all beaded edges prior to plastering. **IMPORTANT NOTE:** If scrim tape is not used the plaster may not adhere to the access panel's frame.

Refit the door and check operation. Ensure there is sufficient clearance behind the frame for the budget lock to operate correctly.