

Quantity

The urinal is available as a single bowl only.
Alternatively in range form of 1, 2, 3 or 4 bowls

Waste Outlet

Bowl urinals are supplied with an integral 32 mm (1 1/4") BSP flush grated waste.

Flushing System

Bowl urinals are supplied with a chrome plated spreader assembly and water inlet fitting to suit 15 mm diameter pipework. The water inlet connection to the flushpipe is top entry for an exposed surface mounted cistern (see Fig.1) or back entry for a concealed duct mounted cistern (see Fig. 2)

Flushpipe

In range form bowl urinals are supplied with 22 mm diameter stainless steel flushpipes, feedpipes, wall fixing clips and all necessary pipe fittings. The length of each flushpipe allows for its cistern to be mounted at the maximum recommended height.

Cistern

In range form bowl urinals are supplied with plastic automatic flushing cisterns. Each cistern is complete with lid, syphon and petcock. The recommended mounting height is 1800 mm minimum and 2000 mm maximum from the underside of the cistern to finished floor level.

Cistern Capacity

No. of bowls	-Range of 1	Range of 2	Range of 3 & 4
Cisterns	-1 x 4.5 litre	-1 x 9.0 litre	-1 x 13.65 litre

Product Code Selection for Order or Quotation

1. Base product code

- 072 bowl urinal

2. Quantity

- 01 -single
 -R1 -range of 1
 -R2 -range of 2
 -R3 -range of 3
 -R4 -range of 4

3. Flushing System

- TE -Top entry
 -BE -Back entry

4. Options

- DP -divider panel (specify quantity).....
 131 -stainless steel cistern
 -WG -white EnviroGlaze colour finish (other colours available)

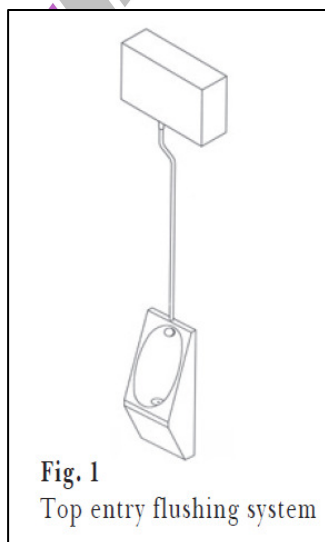


Fig. 1
Top entry flushing system

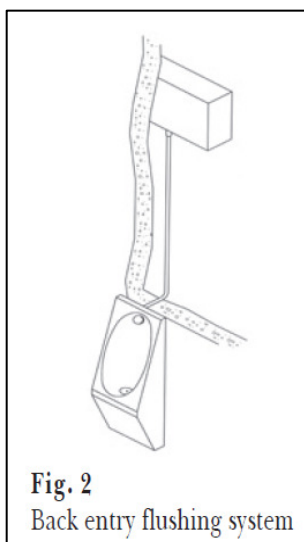


Fig. 2
Back entry flushing system

As improvements in the design and performance of Acorn Powell Limited products is continuous specifications may be subject to change without notification