


Rosemount

smooth flagstones



DEPTHS

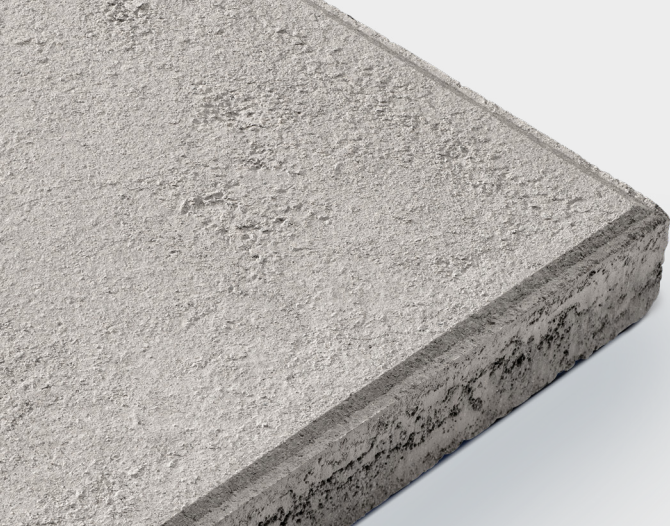

40
Millimetres

FINISH

Smo

Smooth



400 x
400mm

Rosemount
colours

COLOURS

For 'Stock Information' on colours availability - see page 3.



SILVER



SLATE



BUFF



Frost
Resistant



Pedestrian
Use



Abrasion
Resistant

Rosemount

smooth flagstones

Rosemount
technical information

DEPTHS

40
Millimetres

FINISH

Smo
Smooth400 x
400mm

STANDARDS + PERFORMANCE

Product Type	Functional flagstones with a smooth finish
Manufactured to	hEN 1339:2003
Surface Layer	Durable and hard wearing with a minimum surface layer of 8mm
Efflorescence	State-of-the-art factory controlled vapour curing significantly reduces this naturally occurring chemical reaction
Bending Strength	>3.5Mpa Class 1
Slip / Skid Resistance	(USRV) >75 extremely low potential for slip. Specific slip / skid resistance test results are available on request from our Technical Specification Department
Installed to	BS 7533-4:2006
NBS Plus	Q25 315

SUSTAINABILITY

Energy Use	100% renewable
Water Used	100% recycled water
Recyclable	100% of this product can be recycled
Manufacturing	Produced in the UK using responsibly sourced materials
Non-Primary Materials	52 – 60% (surface layer)
Waste Wood + Plastic	100% recycled
BREEAM	A Rating – according to the Green Guide to Specification 4th edition 2009. A+ Rating can be achieved when used in conjunction with a prepared recycled sub-base

AG RECOMMENDATIONS

Close Jointing

AG recommends a close joint of between 2mm - 5mm as per BS 7533 to cater for product alignment (butt jointing should be avoided).

Jointing Sand

AG recommends that silver and slate coloured products are jointed with AG's Granite Sand.

Colour blending

AG recommends that products are blended from 3 packs from alternate sides using full vertical sections.

Please contact our Technical Specification Department for further details.


ADVICE + GUIDANCE

For advice and guidance on ordering, installation, good site practice, etc. visit our website:
www.ag.uk.com/advice+guidance

For maintenance guidance and health and safety advice visit our website:
www.ag.uk.com/maintenance

EDGES

Rosemount is supplied with a nominal 5mm wide x 3mm deep straight chamfer edge as standard.



Straight Chamfer

SPACER NIBS

No formed spacer.

FINISHES

Smooth finish.


Frost
ResistantPedestrian
UseAbrasion
Resistant

SPECIFICATION REFERENCE: NBS PLUS: Q25 SLAB/BRICK/SETT/COBBLE PAVINGS: 31, 315; hEN: 1339:2003

Rosemount

smooth flagstones

Rosemount
Stock Information

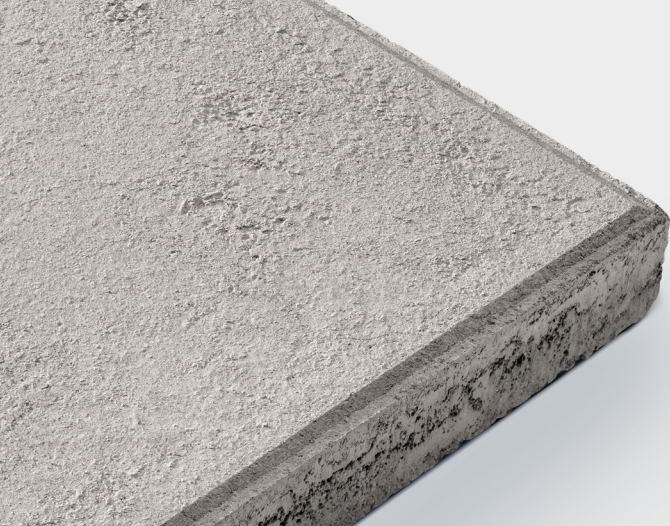

DEPTHS




40
Millimetres

FINISH

Smo

Smooth



400 x
400mm

STOCK INFORMATION

Standard product depth	Size (mm)	In Stock	Available Colours	m ² per pack	Units per m ²	Units per pack	Unit weight (kg)	Weight per pack (t)	Packs per 8 wheeler (Ireland)	Packs per unit lorry (GB/Ireland)
40mm	400 x 400	Yes	Silver / Slate / Buff	16	6.25	100	16.09	1.609	10	GB 17 / IRE 15

Information for a specific colour / depth is available on request from our Technical Specification Department.



Frost Resistant



Pedestrian Use



Abrasion Resistant

MANUFACTURING

Rosemount flags are manufactured from quality locally sourced aggregates. PLANT OF MANUFACTURE: Made at our Fivemiletown production plant.

CERTIFICATION

- ISO 9001** Quality Management.
- ISO 14001** Environmental Management.
- ISO 45001** Occupational Health and Safety Management.
- CE Marking** Download our Declaration of Performance (DOP) data at: www.ag.uk.com/resources

