


# Oak Setts



## Technical Results

Type	European Oak (Quercus Robur)
Country of Origin	UK & Europe
Certification	PEFC & Grown in Britain
Finish	Sawn
Profile	Square Cut
Thickness	100mm
Section	100mm X 100mm
Pack Size	Single
Grading	Natural Rustic
Installation	Free draining compacted Sand (see installation guide)
Moisture Content	wet
Janka Hardness Rating	1,120 lbf (4,980 N)
Density	700kg/m <sup>3</sup>
Modulus of Rupture	14,100 lbf/in <sup>2</sup> (97.1 MPa)
Modulus of Elasticity	1,544,000 lbf/in <sup>2</sup> (10.60 GPa)
Compressive Strength	6,720 lbf/in <sup>2</sup> (46.3 MPa)
Fire Rating	surface spread of flame class 3 (BS476-7)

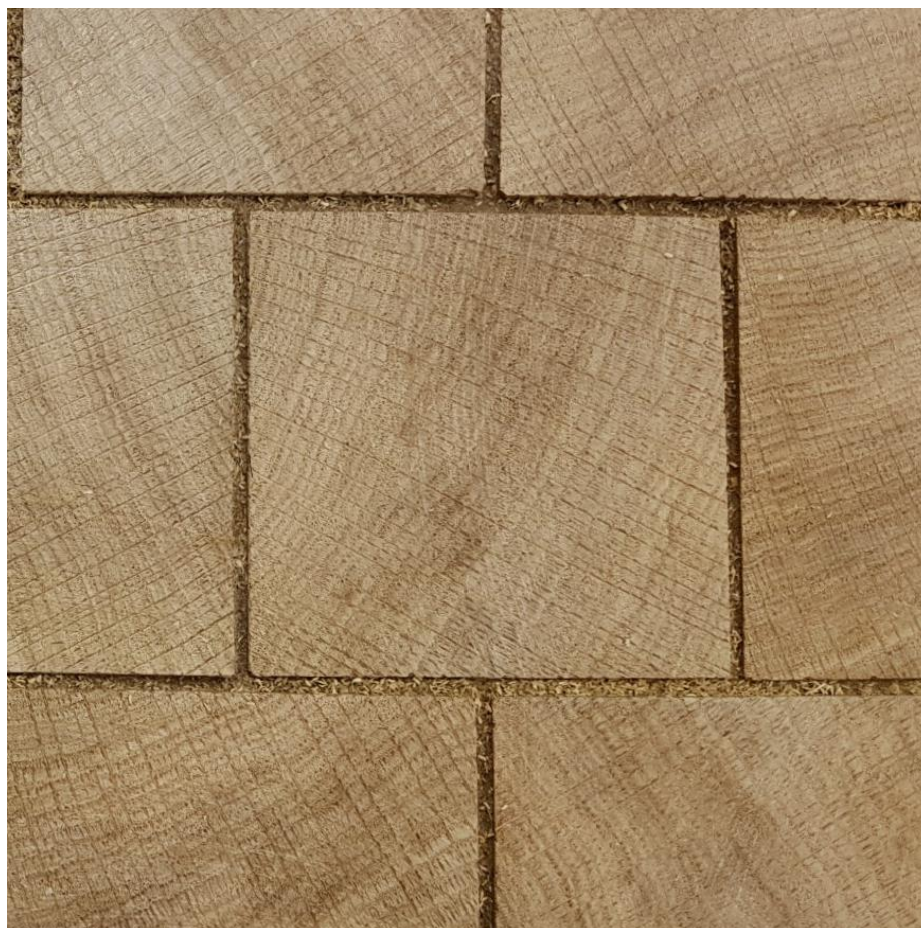

Allgreen Group  
46 Buckland Road  
Pen Mill Trading Estate  
Yeovil  
Somerset  
BA21 5EL

+44(0)1935 415560  
sales@allgreengroup.co.uk

Please note Timber is a natural product and these results are subject to variation.