

Smooth flooring - keep it simple with style

100



The Junction - AltroSmooth Ethos™

“We set a complex brief for Altro... I am delighted to say that not only has Altro provided practical solutions, but also all the products are of the highest standard and pleasing to the eye.”

Roz Smithson, The Junction Project Manager

101



Equally at home in the high street or the workplace, these floors are as attractive as they are easy to maintain. Whether it's looks, durability or whole life costs that concern you most, smooth delivers on every count.

The AltroSmooth ranges can be welded for an impervious floor. They are even suitable for total interior cladding for clean room environments.

For more information on life cycle costs, see page 168

A+ BRE Generic Green Guide Rating for Smooth Flooring, full details available at www.thegreenguide.org.uk



NEW
colours



This timber-look sheet flooring brings warmth to any location, recreating the natural beauty of wood. It can be welded for a seamless, hygienic surface, making it ideal for use in areas where infection control and high standards of cleanliness are important. This handsome interior surface has a factory finished PU coating for added protection and ease of cleaning.

All non stocked colours are usually purchased in full rolls. Delivery for non stocked products may be subject to a lead time. Please contact the Customer Care Centre on +44 1462 707 600 to confirm stock and lead times.

Contributes to reducing the environmental impact of your specification










- A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:

- clubs
- education
- care homes
- hospitals
- shops

Please see product selector on page 15 for full details.

Dimensions: 18m x 1.82m	Format: Roll	Thickness: 2mm
--------------------------------	---------------------	-----------------------

			
	Flaxen Beech 389-86 WR18 / A1M200 LRV 33	Golden Oak 389-21 WR14 / A1M200 LRV 35	Argent Oak 389-49 WR17 / A1M20 LRV 33
	Blonde Maple 389-205 WR172 / A1M200 LRV 49		
	Honey Beech 389-87 WR19 / A1M200 LRV 25	Bay Oak 389-23 WR16 / A1M200 LRV 18	Rich Maple 389-207 WR171 / AIM246 LRV 21
			
	Light Oak 389-240 WR225 / A1M225 LRV 39	Dark Walnut 389-230 WR227 / A1M227 LRV 11	Dark Mahogany 389-235 WR160 / A1M160 LRV 13

Swatches shown at 50% to show detail.

Product information Tel: +44 1462 707 600 E-mail: enquiries@altro.com

Codes: **LRV** = Light Reflectance Value, **WR** = Weldrods, **A1M** = Mastic For an unobtrusive appearance, colour matched weldrods and mastics are available. EXPERIENCE HAS SHOWN THAT PRINTING CANNOT REPRODUCE COLOURS ACCURATELY. IF COLOUR CHOICE IS CRITICAL, PLEASE REQUEST A SAMPLE OF THE MATERIAL





This heavy duty smooth flooring offers you a choice of 14 vibrant or sophisticated colours, from which to design stunning interiors in a variety of applications. A translucent chip insertion adds depth and interest to the flooring.

This homogeneous floor has excellent soil-hiding, appearance retention and low maintenance characteristics. It can be welded for a seamless, hygienic surface, making it ideal for use in areas where infection control and high standards of cleanliness are important. It benefits from a factory finished PUR coating for added protection and ease of cleaning.

All non stocked colours are usually purchased in full rolls. Delivery for non stocked products may be subject to a lead time. Please contact the Customer Call Centre on +44 1462 707 600 to confirm stock and lead times.

Contributes to reducing the environmental impact of your specification:

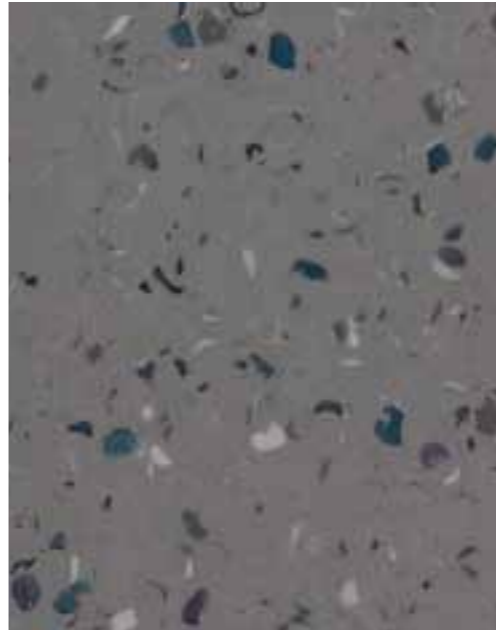













- A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:

- education
- nurseries
- hospitals
- shops
- laboratories

Please see product selector on page 15 for full details.

Dimensions: 20m x 2m	Format: Roll	Thickness: 2mm
-----------------------------	---------------------	-----------------------

				
Vortex 0010* WR130 / A1M86 LRV 19	Zero 0008* WR128 / A1M85 LRV 34	Tryst 0005 WR109 / A1M136 LRV 61	Kinetic 0001* WR105 / A1M01 LRV 80	
				
Aerial 0012* WR142 / A1M71 LRV 28	Ace 0011 WR141 / A1M135 LRV 47	Elite 0007 WR127 / A1M135 LRV 44		
				
Muse 0003 WR107 / A1M12 LRV 65	Scene 0002* WR106 / A1M200 LRV 53	Enigma 0004* WR108 / A1M11 LRV 61	Fuse 0006* WR113 / A1M200 LRV 54	Juxta 0009* WR129 / A1M202 LRV 29
				
Data 0014* WR144 / A1M42 LRV 17	Tango 0013* WR143 / A1M200 LRV 29			

* These colours are non stock, sold in full rolls only and may be subject to minimum order quantities. Please contact Altro for lead time and ensure order is placed early to avoid disappointment.



Product information Tel: +44 1462 707 600 E-mail: enquiries@altro.com

Codes: LRV = Light Reflectance Value, WR = Weldrods, A1M = Mastic For an unobtrusive appearance, colour matched weldrods and mastics are available. EXPERIENCE HAS SHOWN THAT PRINTING CANNOT REPRODUCE COLOURS ACCURATELY. IF COLOUR CHOICE IS CRITICAL, PLEASE REQUEST A SAMPLE OF THE MATERIAL



This decorative and hard-wearing smooth flooring features subtle and abstract patterns; these add a design element, while simultaneously increasing the soil-hiding properties of the floor.

It is particularly suitable for heavy-use and mixed conditions and is therefore frequently specified in areas of intense public circulation. It can be welded for an impervious, hygienic surface, making it ideal for use in areas where infection control and high standards of cleanliness are important. It's a homogeneous, very hard-wearing floor that's easy to clean and maintain, with a permanent PUR finish for added protection.

All non stocked colours are usually purchased in full rolls. Delivery for non stocked products may be subject to a lead time. Please contact the Customer Call Centre on +44 1462 707 600 to confirm stock and lead times.

Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:


- corridors
- education
- reception areas
- sports halls
- hospitals
- laboratories

Please see product selector on page 15 for full details.

Dimensions: 20m x 2m	Format: Roll	Thickness: 2mm
-----------------------------	---------------------	-----------------------



Ocean 85300015
WR07 / A1M74
LRV 15



Lupin 85300008
WR38 / A1M203
LRV 34



Lavender 85300007
WR69 / A1M134
LRV 32



Sienna 85300006
WR68 / A1M27
LRV 40



Azure 85300011
WR06 / A1M200
LRV 30



Fountain 85300004
WR219 / A1M74
LRV 43



Mauve 85300003
WR220 / A1M200
LRV 44



Concrete 85300013
WR04 / A1M85
LRV 40



Frost 85300009
WR197 / A1M200
LRV 50



Steel 85300010
WR80 / A1M85
LRV 41



Meadow 85300012
WR37 / A1M202
LRV 39



Botanic 85300016
WR36 / A1M202
LRV 30



Quartz 85300014
WR201 / A1M84
LRV 21



Sand 85300005
WR67 / A1M200
LRV 41



Coral 85300002
WR218 / A1M200
LRV 54



Parchment 85300001
WR02 / A1M11
LRV 53



Product information Tel: +44 1462 707 600 E-mail: enquiries@altro.com

Codes: LRV = Light Reflectance Value, WR = Weldrods, A1M = Mastic For an unobtrusive appearance, colour matched weldrods and mastics are available. EXPERIENCE HAS SHOWN THAT PRINTING CANNOT REPRODUCE COLOURS ACCURATELY. IF COLOUR CHOICE IS CRITICAL, PLEASE REQUEST A SAMPLE OF THE MATERIAL



samples@altro.com



With a range of beautiful, natural designs and a selection of bright and stimulating colours, AltroSmooth Intrinsic is a popular choice to generate interest and a welcoming environment in areas where the public congregates. It can be welded for a seamless, hygienic surface, making it ideal for use in areas where infection control and high standards of cleanliness are important. AltroSmooth Intrinsic is also economical, hard-working and homogeneous; an effective solution for general locations. It features a factory finished PU coating for added protection and ease of cleaning.

All non stocked colours are usually purchased in full rolls. Delivery for non stocked products may be subject to a lead time. Please contact the customer Call Centre on +44 1462 707 600 to confirm stock and lead times.

Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk


Typical applications:

- clubs
- schools
- sports halls
- hospitals
- shops
- laboratories

Please see product selector on page 15 for full details.

Dimensions: 20m x 2m	Format: Roll	Thickness: 2mm
-----------------------------	---------------------	-----------------------

	Baleen 18500-2010 WR210 / A1M84 LRV 29	Polar 18500-2006 WR215 / A1M191 LRV 54	Fudge 18500-2005 WR94 / A1M200 LRV 45
Slate 18500-2007 WR101 / A1M72 LRV 12	Sea Green 18500-2003 WR217 / A1M179 LRV 39	Nutmeg 18500-2004 WR214 / A1M200 LRV 25	Barley 18500-2012 WR93 / A1M12 LRV 65
Royal 18500-2008 WR216 / A1M223 LRV 11	Cornflower 18500-2009 WR142 / A1M71 LRV 30	Cirrus 18500-2002 WR211 / A1M200 LRV 43	Dusk 18500-2011 WR212 / A1M134 LRV 30



Product information Tel: +44 1462 707 600 E-mail: enquiries@altro.com

Codes: **LRV** = Light Reflectance Value, **WR** = Weldrods, **A1M** = Mastic For an unobtrusive appearance, colour matched weldrods and mastics are available. EXPERIENCE HAS SHOWN THAT PRINTING CANNOT REPRODUCE COLOURS ACCURATELY. IF COLOUR CHOICE IS CRITICAL, PLEASE REQUEST A SAMPLE OF THE MATERIAL