



# AMBIRAD

---


## Quartz Glow

Electric Radiant Heating

---



**AMBIRAD**  
HEATING AND VENTILATION SOLUTIONS

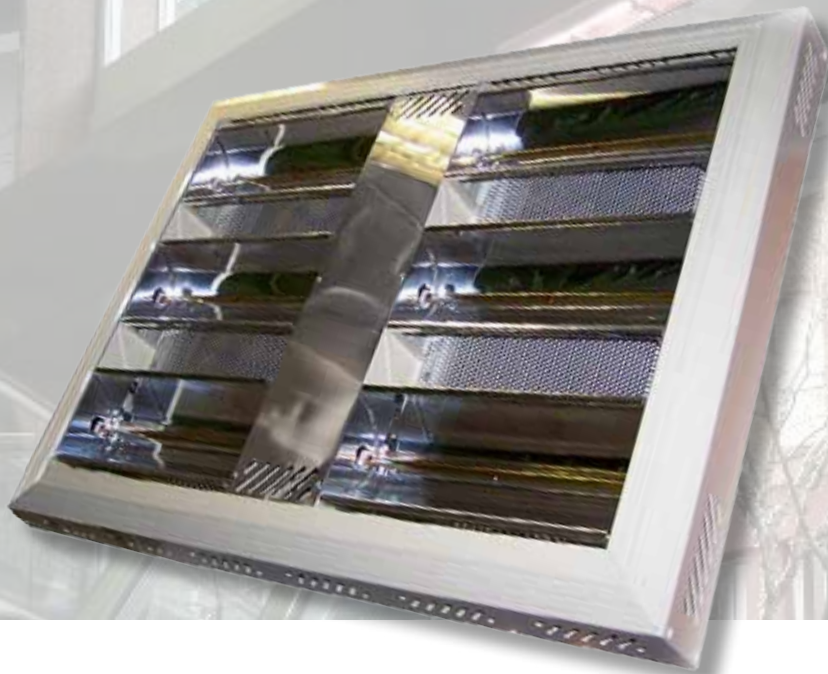


# Quartz Glow

## Electric Radiant Heaters

The AmbiRad Quartz Glow range provide instant high frequency infra-red heat, which is focused exactly where required.

Quartz Glow incorporate the latest shortwave heating technology, giving energy efficient ways to heat people indoors or outside.

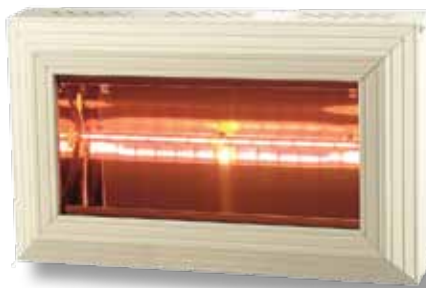

### Model Range

There are three Quartz Glow ranges:

- > The Apollo range of indoor heaters designed to suit all industrial and commercial situations and heat requirements
- > The Sorrento range is a robust weatherproof heater
- > The Titan range, ideal for emergency or 'spot' heating. Comes in static or mobile versions

Model	Heat Input kW	Description	Dimensions	Minimum mounting height (m)
QH 15-1	1.5	Single tube	420 x 225 x 115	2.1
QH 30-1	3.0	Double tube	420 x 390 x 115	3.0
QH 45-1	4.5	Triple tube	420 x 525 x 115	3.5
QH 45-3	4.5	Triple tube - 3ph	420 x 525 x 115	3.5
QHL 30-1	3.0	Double linear tube	855 x 255 x 115	3.0
QHL 45-1	4.5	Triple linear tube	1280 x 225 x 115	3.5
QHL 45-3	4.5	Triple linear tube - 3ph	1280 x 255 x 115	3.5
QHL 90-3	9.0	Triple double linear tube - 3ph	855 x 632 x 115	5.0

### Apollo

The AmbiRad Apollo range of indoor heaters, manufactured from extruded aluminium, offers a choice of power options 1.5kW - 9kW to suit all situations and requirements. They are adjustable both vertically and horizontally for accurate heat placement. Safety guards are available where required.

The Apollo range is ideal for:

- > Churches
- > Factories
- > Farming and horticulture
- > Garages and workshops

## Sorrento

The AmbiRad Sorrento range is a robust weatherproof heater (IP24 rated). The range is a premium versatile heater that is also available in a double or triple option and can be grouped together horizontally and vertically making it suitable for countless applications.

The Sorrento range is ideal for:

- > Churches
- > Horticulture
- > Garages
- > Restaurants and bars
- > Workshops

Model	Heat Input kW	Description	Dimensions	Minimum mounting height (m)
SOR 15	1.5	Single tube	430 x 228 x 323	2
SORDL 30	3.0	Double linear tube	815 x 228 x 323	2.5 - 4.0
SORTL 45	4.5	Triple linear tube	1202 x 228 x 323	2.5 - 4.0



Model	Heat Input kW	Description	Dimensions
TI-STAT	3.0	Static heater	650 x 430 x 200
TI-MOB	3.0	Mobile heater	1140 x 650 x 650

## Titan

The AmbiRad Titan range offers efficient and reliable emergency or 'spot' heating. Both the mobile and static versions of the Titan are fitted with an anti-tilt device to prevent misuse or accidents on site. The Titan mobile also has lockable front wheels, further enhancing its safety.

The Titan range is ideal for:

- > Building and construction
- > Emergency heating
- > Garages and workshops
- > Paint curing
- > Paint and plaster drying



**AMBIRAD LIMITED**  
Fens Pool Avenue  
Brierley Hill  
West Midlands DY5 1QA  
United Kingdom

Tel: **01384 489 700**  
Fax: **01384 489 707**

[ambiradsales@nordyne.com](mailto:ambiradsales@nordyne.com)  
[www.ambirad.co.uk](http://www.ambirad.co.uk)



**AMBIRAD**   **AIRBLOC**   **NORDAIRNICHE**   **BENSON**