


Apollo Lighting Ltd : Cornice

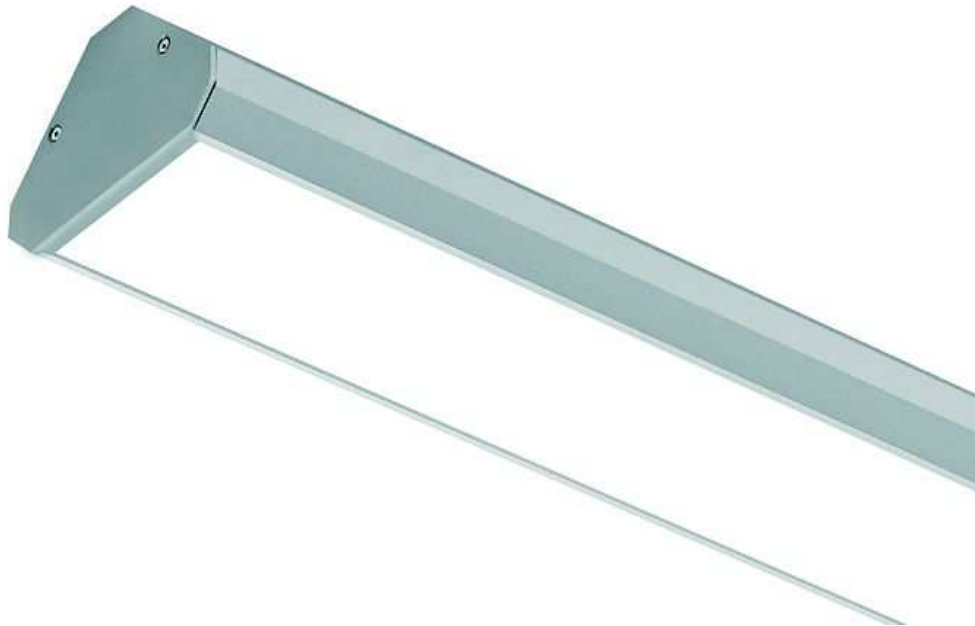

Overview

The Cornice is a range of low profile extruded aluminium corner mounting LED luminaires. The Cornice has been designed for mounting in corners and therefore provides an ideal solution for corridors, staircases and other areas where space is limited. The Cornice is also available in continuous run formats and as a pendant luminaire.

Features


- Utilises the latest high efficiency LED technology
- Perfect for corner mounting or as a pendant luminaire
- Low profile, extruded aluminium housing
- 3000K and 4000K colour temperature options
- Dimmable versions available
- Emergency versions available
- Different output options
- Continuous run versions available on request

Materials and Finishes

Body	Extruded Aluminium
Controller	TP(a) Polycarbonate
Finish	Silver


Technical Details

Gear Integral Electronic LED Driver
Lamp Type High Power LED




The output of high-power LEDs is constantly improving therefore the type of LED in this product may change slightly to reflect the optimum performance offered by LED technology.

Photometrics

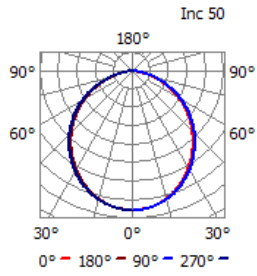

CRNS4240
Effective Output 4240 lm
SHR NOM 1.50
SHR MAX 1.524
SHR MAX TRANS 1.704

Dimensions

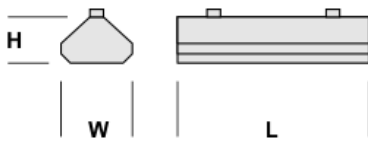

	L	W	H
Cornice 24	925	101	64
Cornice 30	1155	101	64
Cornice 42	1615	101	64

Ordering

All versions supplied including LED light source.

Order Code	Description	Light Source	Weight (kg)
CRNW24	Cornice corner mounted	23W 2400lm LED	2.4
CRNW30	Cornice corner mounted	28W 3000lm LED	2.9
CRNW42	Cornice corner mounted	38W 4200lm LED	4.1
CRNS24	Cornice pendant mounted	23W 2400lm LED	2.4
CRNS30	Cornice pendant mounted	28W 3000lm LED	2.9
CRNS42	Cornice pendant mounted	38W 4200lm LED	4.1

Suffix

D	Analogue 1–10V Dimming (see accessory DC/100)
DAL	Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
30	3000K Colour Temperature
40	4000K Colour Temperature

Emergency

E	Integral 3hr Maintained Emergency
EAD	Integral 3hr Maintained Addressable Emergency via DALI Emergency System
ELA	Integral 3hr Maintained Self Testing Emergency

Emergency options are not available on 925mm versions.

Accessories

CRNSUS	Cornice 1.5m adjustable suspension kit
CRNSUSP	Cornice 1.5m adjustable power suspension kit
DC/100	Dimming Controller & Switch. Analogue 1–10V
DC1PM	Push to Make Switch for use with Touch Dim or Switch Dim gear



IP20





Apollo Lighting Ltd

Unit D9 Cross Green Approach
Leeds
LS9 0SG

Tel: 0113 240 5511

Fax: 0113 240 5151

Web: www.apollolighting.co.uk

