

## Sensorflow 21 Compact Tubular 15cm Panel Spout Integral Sensor, Link



### Illustrated

**A4847** Sensorflow 21 compact tubular panel mounted 150mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, link

### Configuration options

#### Material

Chrome Plated Brass

#### Weights

A4847 2.00KG

#### Colours

Chromium plated (AA)  
Brushed Steel (GN)


#### Flow rates

3.7 Litres per minute @ 3 bar pressure

#### Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of Chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Must link to a mains version A4846 alternatively there are stand alone battery powered units.

Flow rates regulated to 3.7 Litres per minute

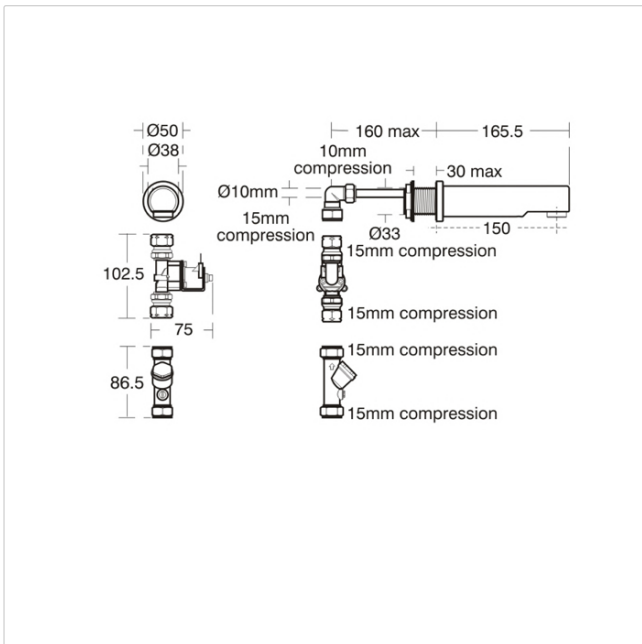

### Frequently used applications

Education	Factory
General Healthcare	Hotels
Office	Public Building
Pubs and Clubs	Retail
Sports and Leisure	Vandal Risk

### Features

Water Saving

### Accreditations

Water Label  
WRAS