

Sensorflow 21 Compact Tubular 15cm Panel Spout Integral Sensor, Battery



Illustrated

A4845 Sensorflow 21 compact tubular panel mounted 150mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, battery

Configuration options

Material

Chrome Plated Brass

Weights

A4845 1.74KG

Colours

Chromium plated (AA)
Brushed Steel (GN)


Flow rates

4.7 Litres per minute @ 3 bar pressure

Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of Chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Stand alone battery powered unit.

Flow rates, regulated to 5 Litres per minute or optional flow straightener outlet 2 Litres per minute @ 0.1 bar

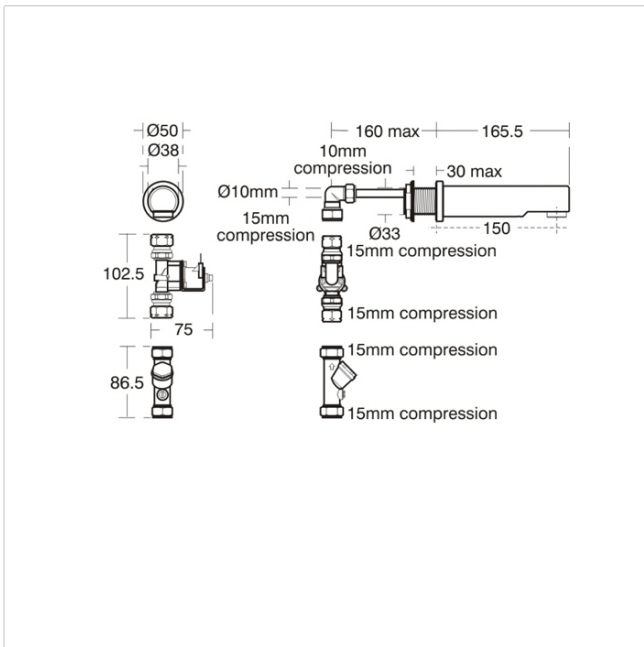

Frequently used applications

Education	Factory
General Healthcare	Hotels
Office	Public Building
Pubs and Clubs	Retail
Sports and Leisure	Vandal Risk

Features

Water Saving

Accreditations

Water Label
WRAS

*Armitage
Shanks*

Email: info@idealspec.co.uk
Tel: 0870 122 8822
Fax: 0870 122 8282
Web: www.idealspec.co.uk

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

Powered by
IdealSpec

Date created:25/01/2016