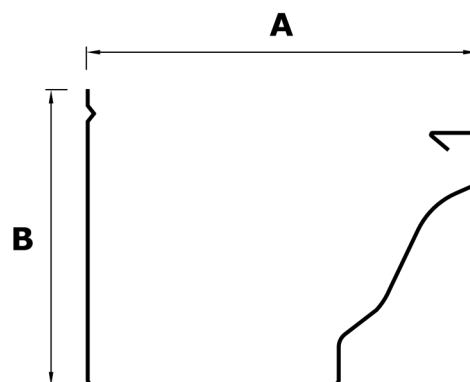
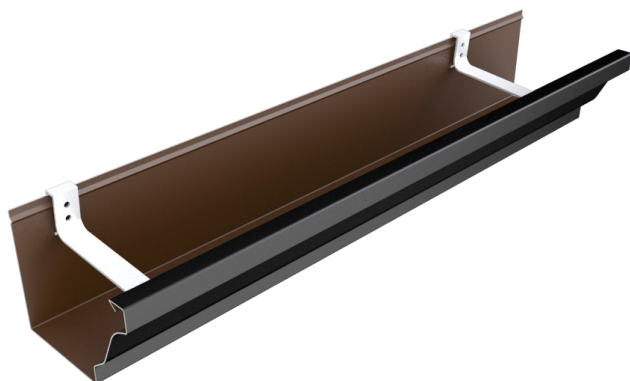


ALSTREAM**Seamless 5/6" Gutter**

| Gutter Size A & B | Maximum length | Joint | Coil Product Code |
|----------------------|-------------------|--------------|-------------------|
| 125(5") x 87mm | 30m+ | Not required | CL8C9300 |
| 150 (6") x 130mm | 30m+ | Not required | CL8C9381 |

Product Description

Alstream Seamless aluminium gutters are the perfect alternative to UPVC and has been successfully installed across the UK for over 40 years. This superior system provides 30+ years of maintenance free use. Manufactured onsite, the system has no joints and is made to length creating a waste free sustainable solution that is also 100% recyclable at the end of its functional life.

Properties

Formed from 0.9mm aluminium coil—alloy 3105B H45
Available in either 5" or 6" Ogee profiles
Coated with an Abrasion Resistant System (ARS) in a range of colours including; Black, White, Brown, light and dark Grey.

Jointing

The main advantage of seamless gutters is that they do not have any joints, as the material is produced in lengths on site. When a corner or stop end is required, either crimped endcaps or riveted box/stripmitres are combined with the long lengths to create unbroken lengths of up to 30 meters.
For step by step instructions please refer to ARP product installation guide.

Functional Life Expectancy

When installed by an ARP Approved Installer, the product will not require any maintenance for 30 years and has a life expectancy in excess of this period. Further information is available from the ARP website.

Specification Information

Clause: R10/311 Rainwater Drainage Systems

Product: Alstream Seamless Gutter System

Manufacturer: ARP Ltd
Unit 2 Vitruvius Way
Meridian Business Park
Braunstone, Leicester
LE19 1WA

Handling & Storage

Gutters, downpipes and fittings, particularly with polyester powder coat finish should be handled with care and should preferably be stored under cover on racks to prevent scratching. All lengths are supplied in protective polythene wrapping, components suitably packed in boxes. If painted products are to be stored outside, cover with tarpaulin to guard against water ingress into the protective polythene. Mill finish items should be stored undercover to avoid uneven oxidation prior to being fitted.

Maintenance

In order to maintain proper working order, gutters should be periodically cleaned out and any built-up debris removed. Check all fixings are secure and take any remedial action to rectify if necessary. To maximise the life of the decorative paint finishes, all parts should be washed down with clean water at least every 12 months and any damage repaired. In marine/industrial environments, this period may need to be shortened to 6 months.

Further Information

Please visit www.arp-ltd.com or contact the ARP team of 0116 289 4400 for any other information