



PRODUCT SPECIFICATION

GENERAL

FINISH:	Matt Nickel	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Zinc	GROSS WEIGHT:	To Be Advised
DIMENSIONS:	H: 212mm W: 120mm D: 165mm H: 8.35" W: 4.72" D: 6.45"	CLASS:	cETLus (Class I)
INSTALLATION ORIENTATION:	Wall Mount	LISTING LOCATION:	Dry
CUT OUT HOLE:	Not Applicable	FITTING METHOD:	4" Octagon Box
RECESS DEPTH:	Not Applicable	ADA COMPLIANT:	No
FIRE RATING:	Not Applicable	IC RATING:	Not Applicable
		VOLTAGE:	Mains 120 (V)

MAIN LAMP

LIGHT SOURCE:	E26/Medium	R9:	Lamp Dependant
MAXIMUM WATTAGE:	60W Max	MACADAM ELIPSE:	Not Applicable
MAXIMUM LAMP LENGTH:	95 (mm) / 3.7"	UGR:	Not Applicable
LAMP INCLUDED?	No	BEAM ANGLE:	Not Applicable
DELIVERED LUMENS:	Lamp Dependant	AVERAGE LIFESPAN:	Lamp Dependant
COLOR TEMP:	Lamp Dependant	L70:	Not Applicable
CRI:	Lamp Dependant		





ADDITIONAL LAMP

LIGHT SOURCE:	High Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	1W	UGR:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	BEAM ANGLE:	To Be Advised
DELIVERED LUMENS:	58(lm)	TILT ADJUSTMENT ANGLE:	90 (Degrees)
COLOR TEMP:	2700 (K)	ROTATION ADJUSTMENT ANGLE:	180(Degrees)
CRI:	80	AVERAGE LIFESPAN:	To Be Advised
R9:	To Be Advised	L70:	To Be Advised

ELECTRICAL

SWITCHED:	Yes	DRIVER / BALLAST VOLTAGE:	100-240 (V)
DIMMABLE:	No	DRIVER AVERAGE LIFESPAN:	30,000 (Hrs)
DIMMING METHOD:	Not Applicable	MAIN LAMP EFFICACY:	Lamp Dependant
DRIVER OUTPUT CURRENT:	350 (mA)	ADDITIONAL LAMP EFFICACY:	To Be Advised
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER INCLUDED?	Yes (Integral)
SUPPLY FREQUENCY:	50/60 (Hz)		


PRODUCT ELEVATIONS

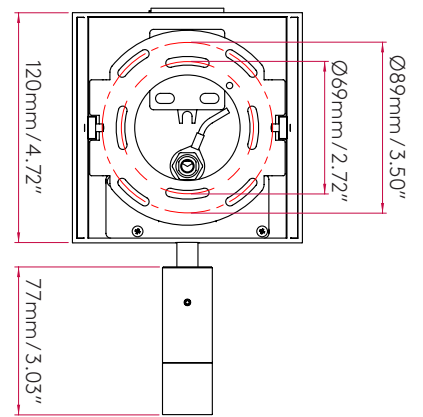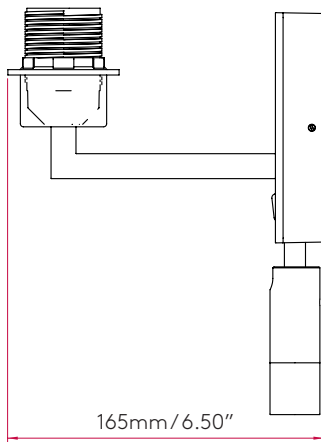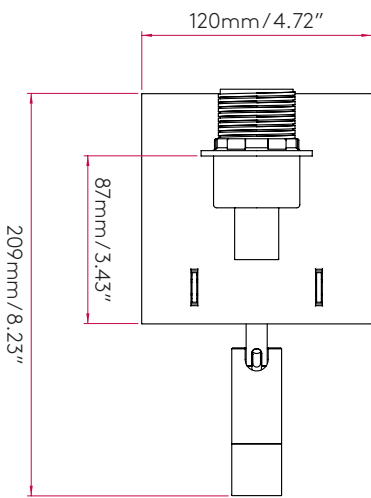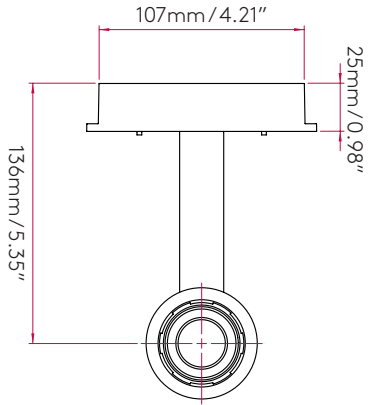

ADDITIONAL INFORMATION



SHADE SOLD SEPARATELY



BOX QUANTITY X6