



PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	1.5 (kg)
DIMENSIONS:	H:229mm W:195mm D:135mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230v
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

MAIN LAMP

LIGHT SOURCE:	E27/ES	R9:	Lamp Dependant
MAXIMUM WATTAGE:	1 x 60W Max	MACADAM ELIPSE:	Not Applicable
MAXIMUM LAMP LENGTH:	145 (mm)	UGR:	Not Applicable
LAMP INCLUDED?	No	BEAM ANGLE:	Not Applicable
LUMINOUS FLUX:	Lamp Dependant	AVERAGE LIFESPAN:	Lamp Dependant
COLOUR TEMP:	Lamp Dependant	L70:	Not Applicable
CRI:	Lamp Dependant		


ADDITIONAL LAMP

LIGHT SOURCE:	High Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	1W	UGR:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	BEAM ANGLE:	To Be Advised
LUMINOUS FLUX:	58 (lm)	TILT ADJUSTMENT ANGLE:	90 (Degrees)
COLOUR TEMP:	2700 (K)	ROTATION ADJUSTMENT ANGLE:	180 (Degrees)
CRI:	85	AVERAGE LIFESPAN:	60,000 (Hrs)
R9:	To Be Advised	L70:	To Be Advised

ELECTRICAL

SWITCHED:	Yes	DRIVER / BALLAST VOLTAGE:	100-240 (V)
DIMMABLE:	No	DRIVER AVERAGE LIFESPAN:	30,000 (Hrs)
DIMMING METHOD:	Not Applicable	MAIN LAMP EFFICACY:	Lamp Dependant
DRIVER OUTPUT CURRENT:	350 (mA)	ADDITIONAL LAMP EFFICACY:	To Be Advised
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER / BALLAST INCLUDED?	Yes (Integral)
SUPPLY FREQUENCY:	50/60 (Hz)		


PRODUCT ELEVATIONS

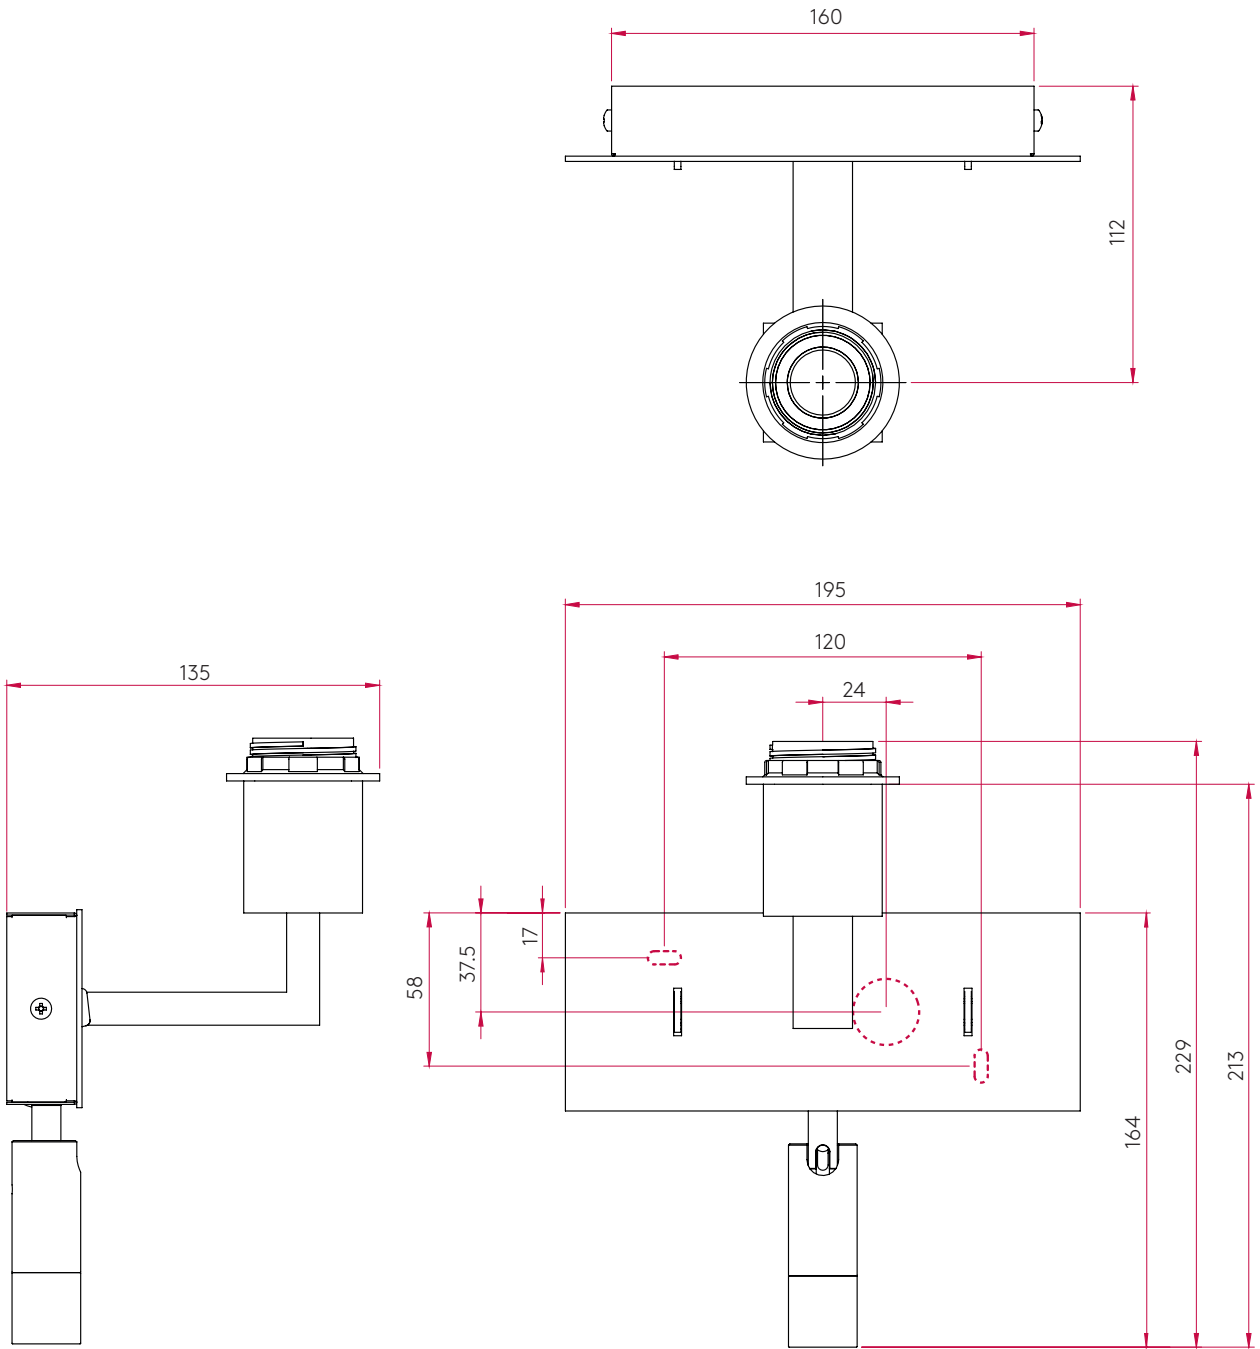

ADDITIONAL INFORMATION



SHADE SOLD SEPARATELY



BOX QUANTITY X6