

RIB 7834
SKU 1205002

astro



PRODUCT SPECIFICATION

GENERAL

| | | | |
|----------------------------------|-------------------------|------------------------|--|
| FINISH: | Painted Silver | CABLE LENGTH: | Not Applicable |
| MAIN MATERIAL: | Metal - Aluminium | GROSS WEIGHT: | 0.95 (kg) |
| DIMENSIONS: | H:81mm W: 230mm D:123mm | CLASS: | CE (Class I) |
| INSTALLATION ORIENTATION: | Wall Mount | IP RATING: | IP54 |
| CUT OUT HOLE: | H: 82mm W: 222mm | BATHROOM ZONE: | Zone 1,2,3 |
| RECESS DEPTH: | 95mm | VOLTAGE: | Mains 230V |
| FIRE RATING: | Not Applicable | PRODUCT F MARK: | Suitable for mounting on flammable materials |

LAMP

| | | | |
|-----------------------------|------------------------|-----------------------------------|----------------|
| LIGHT SOURCE: | Through-Hole | MACADAM ELIPSE: | 7-Step |
| MAXIMUM WATTAGE: | 24 x 0.2W Through-Hole | UGR: | Not Applicable |
| MAXIMUM LAMP LENGTH: | Not Applicable | BEAM ANGLE: | Not Applicable |
| LAMP INCLUDED? | Yes (Integral) | TILT ADJUSTMENT ANGLE: | Not Applicable |
| LUMINOUS FLUX: | 115.03 (lm) | ROTATION ADJUSTMENT ANGLE: | Not Applicable |
| COLOUR TEMP: | 3000 (K) | AVERAGE LIFESPAN: | Not Applicable |
| CRI: | 80 | L70: | To Be Advised |
| R9: | -2.2 | | |


ELECTRICAL

| | | | |
|-------------------------------|----------------|---------------------------------|----------------|
| SWITCHED: | No | SUPPLY FREQUENCY: | 50 (Hz) |
| DIMMABLE: | No | DRIVER/BALLAST VOLTAGE: | 200-240 (V) |
| DIMMING METHOD: | Not Applicable | DRIVER AVERAGE LIFESPAN: | Not Applicable |
| DRIVER OUTPUT CURRENT: | 50 (mA) | EFFICACY: | 25.28 (lm/W) |
| DRIVER OUTPUT VOLTAGE: | Not Applicable | DRIVER/BALLAST INCLUDED? | Yes (Integral) |

ADDITIONAL INFORMATION




 1000 HOURS SALT-SPRAY TESTED




BOX QUANTITY X18

PRODUCT ELEVATIONS


TOP

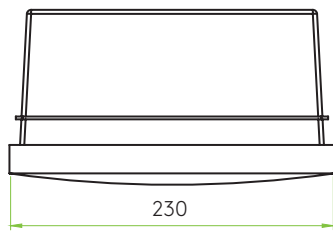


SIDE



FRONT

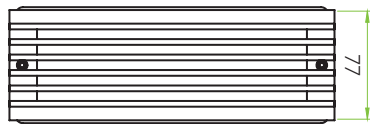

SIDE



BACK

