

BAL Rapid-Mat Simply better

- ▶ Lower project costs
- ▶ Easier to use
- ▶ Faster to install
- ▶ Guaranteed system

See it for yourself:



www.see-it-for-yourself.com

BAL Rapid-Mat

Fast-track tiling on challenging floors demands something new, something better.

For problematic floors...
The fast, cost-saving answer.



BAL Rapid-Mat

Laying down a new benchmark.



The uncoupling solution that cuts your overall costs, saves you time... and carries a full BAL 25-year guarantee.



Laying down a new benchmark.
www.see-it-for-yourself.com

   
www.see-it-for-yourself.com

BAL Rapid-Mat Simple savings

The fast-track, easy-install system for tiling timber, heated screeds or for most floors subject to lateral movement stresses.




Needs 20% less adhesive than cavity mats:
SAVE 45kg per 30m roll.

A new standard in uncoupling: nothing else has ever been this good.

Reduces project costs, easy to install, needs fewer mixes, ready to tile immediately...

- ▶ **Lower adhesive costs**
Uses 20% less adhesive than ordinary cavity mats, saving you 1.5kg for every single m².
- ▶ **Simple to use**
1mm profile avoids over-increasing floor heights, easy roll-out and simple gridline cutting guide, with additional tapes not required.
- ▶ **Faster to install**
Use either way up, no need to fill cavities with adhesive, just roll out and start tiling.
- ▶ **Use it anywhere**
New screeds, underfloor heating, timber: other suitable substrates subject to lateral movement or stress.
- ▶ **Easy to transport**
Lightweight design, just 8.5kg per 30m roll, for no-fuss carrying and storage.
- ▶ **Fully guaranteed**
The only complete 25-year guaranteed system solution, when used with BAL recommended products.

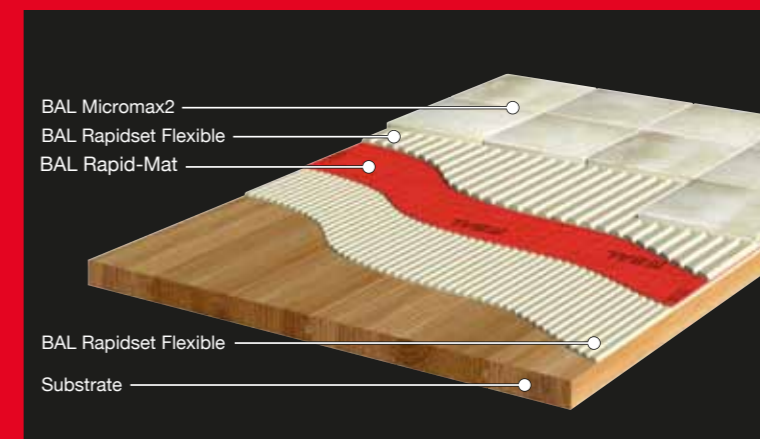

How fast and easy is it? See it for yourself.

To find out just how good BAL Rapid-Mat is, see it in action. Simply go to www.see-it-for-yourself.com and watch the video.

After seeing the video, get down to your local BAL stockist and see it up close. Then, all you need to do is try it.

www.see-it-for-yourself.com

For full product details, always refer to the Technical Data Sheet.