
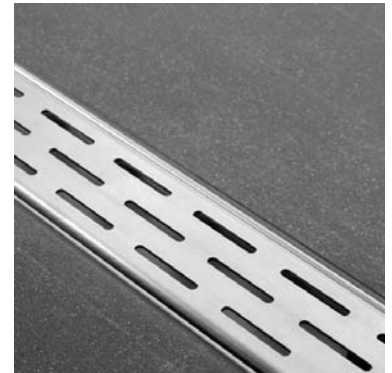


Issued - 24 June 2011

Flex Class – Linear Shower Channel

An attractive channel in 316 Marine Grade Stainless Steel with a simple FIXT Style grate design. With key features normally found on more expensive models, this concrete floor slimline channel suits tight budgets, without compromising on quality E&OE

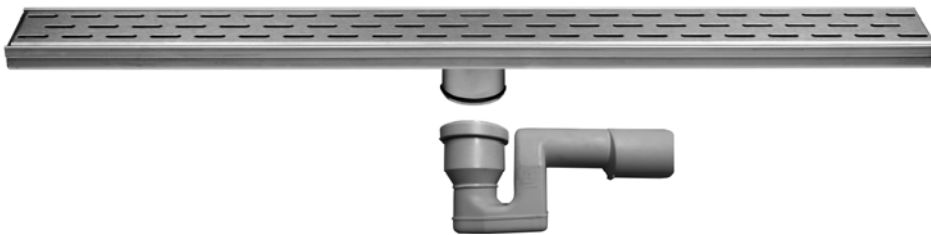

PRODUCT CHARACTERISTICS

- Very high quality Marine Grade 316 Stainless Steel offers superior resistance to chemical attack, & is especially suitable for coastal installations
- Outlet is CENTRAL, & the 'Push Fit' DN 50mm trap assembly can be rotated through 360 degrees
- Removable Stainless Steel grate is reversible offering a flat cover or the option to insert matching tiles
- Height adjustable S/Steel Grate has a foot friendly finish & allows various thicknesses of tile to be used
- SPLIT Grate Option for installation below doors, allowing 'snag-free' access to outlet via removable grate section
- Installation Sealing Kit – Optional Extra. See Data Sheets

APPLICATIONS

Flex Class Shower Channels are wide collection vessels used within wet room showers, & are offered in various lengths. Suits:

- En-Suites – small bathrooms where space efficiency is at a premium
- High End Designer Bathrooms – Large sizes add to the feeling of space within a shower area
- Refurbishments & New Build
- Floor Structures – Design for Concrete floors. Can be used on Board over Timber Joist floors when fully supported.

Call for advice.

TECHNICAL DATA

- Size - Single Grate : 500, 600, 700, 800, 900, 1000, 1100, 1200mm
- Size - Split Grate : 500, 600, 700, 785, 800, 885, 900, 1000, 1100, 1200mm
- Size - Width : 60mm
- Profile : Channel approx 20mm in Cross Section
- Split Grate Length : Short section approx. 200mm, & remainder makes up full channel length
- Waste & Trap : Trap 50mm Water Seal, Horizontal Outlet DN 50mm c/w DN/BS2" Adaptor
- Installation Sealing Kit : OPTIONAL - Waterproof Sealing Gasket to fit surrounding flange
 : OPTIONAL - AquaeGUARD or AquaeSEAL Waterproof Membranes ~ See Data Sheets
 : A floor gradient of max. 2.5% must be built into the surrounding floors

MATERIAL

- Channel & Grate : 1.5mm thick 316 Stainless Steel (Marine Grade)
- Trap : Push Fit with EPDM seal
- Install Kit : Adjustable feet, & Earthing tag

CAPACITY

- Waste & Trap 50mm Seal : Horizontal (24 > 26 Ltrs/Min) location dependant

Issued - 24 June 2011

INSTALLATION INSTRUCTIONS

- See Separate Sheet : Included in Package

PACKAGING

- Cardboard Tube : to suit Shower Channel

CONTENTS

Supplied in Single Tube

- Shower Channel
- Push fit trap – Horizontal DN 50mm Outlet
- Adjustable cover grate with FIXT Lozenge Style
- Adjustable Feet, & Earth Tag
- Installation Instructions

SPECIFICATION – FLEX CLASS Linear shower channel in 316 S/Steel with outlets to suit ‘push-fit’ trap with 360 degree outlet rotation accessed by removable grate, Size 60mm Wide x _____mm Long, Article Nr

Range	Size	ART No.
FLEX Class	500 Long Shower Channel, Single Grate & Trap	008.00220
FLEX Class	600 Long Shower Channel, Single Grate & Trap	008.00221
FLEX Class	700 Long Shower Channel, Single Grate & Trap	008.00222
FLEX Class	800 Long Shower Channel, Single Grate & Trap	008.00223
FLEX Class	900 Long Shower Channel, Single Grate & Trap	008.00224
FLEX Class	1000 Long Shower Channel, Single Grate & Trap	008.00225
FLEX Class	1100 Long Shower Channel, Single Grate & Trap	008.00226
FLEX Class	1200 Long Shower Channel, Single Grate & Trap	008.00227

