

# EXY

WEB PIN™ 149



EXY's internal reflector system allows fixture bodies to be painted the same color inside and out creating the illusion of fixtures being off. This unique visual effect also reduces glare and maintains high levels of efficacy.



## GENERAL SPECIFICATION

**Body and trim:** Steel and aluminum.

**Heat sinks:** Die cast aluminum. Exy uses Xacara heat sinks for passive thermal management.

**Finish:** Powder coated as specified. Custom paint finishes available to special order.

**Suspension:** Three aircraft cables.

**Power cable:** Silver braided.

**External reflector:** Aluminum, painted inside to match outside finish.

**Internal reflector:** Matt frosted aluminum finish with facets.

**Decorative disc/ring:** 6mm/¼" green tint, acrylic (faux glass) with a polished edge and a sandblasted finish, retained by three stainless steel cylindrical finials.

**Drivers:** HPF, electronic, 120-277V, 0-10V dimming.

**Mechanical:** Luminaires mount to a junction box (by others).

**Approvals:** CE, ETL.

**A SPECIFY LAMP/LUMINAIRE TYPE**

Code:	Lamp:	* Deliverd lms:	Weight:	Photometry:
51 5500	26W LED downlight	2000	6Kg/13lb	File# 515500
51 5501	45W LED downlight	3300	6.5Kg/14lb	File# 515501
51 5502	26W LED uplight and 26W LED downlight	2000 + 2000	7Kg/15.5lb	File# 515502
51 5503	26W LED uplight and 45W LED downlight	2000 + 3300	7.5Kg/16.5lb	File# 515503

**B SPECIFY CCT**

- 30 3000K (min 80CRI)
- 35 3500K (min 80CRI)
- 40 4000K (min 80CRI)

**C FINISH**


- BL Black
- MS Metallic silver
- WH White
- OT Custom paint (contact factory)

**D SPECIFY OPTIONS**

- DA DALI drivers (*contact factory for availability*)
- DX DMX drivers (*contact factory for availability*)
- DZ 0.1% dimming (0-10V, *contact factory for availability*)
- DS Decorative disc
- RR Decorative ring
- TC Twin circuit

Example Specification Code: 51 5500 • 30 • BL

\* Data for 4000K LEDs

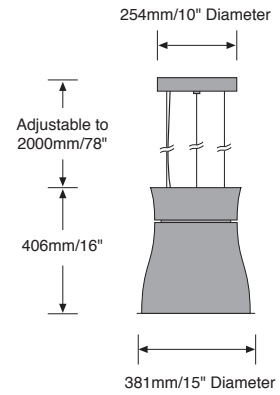

RR Decorative ring

DS Decorative disc

Note: Due to constant changes in LEDs, please check our website for current product specifications.