

XACARA MULTI

WEB PIN™ 187



GENERAL SPECIFICATION

Body: Die cast and extruded aluminum.

Finish: Powder coated, as specified.

Suspension: Twin stainless steel aircraft cable.




Power cable: Silver braided.

Reflectors: Aluminum, specular finish with multiple facets.

Protective lens (optional): Clear glass. Recommended for applications where fixture may be regularly handled or come in contact with excessive air contaminants.

Drivers: Integral, 120/277V electronic with 0-10V dimming (10%).

Approvals: ETL/US, ETL/C, CE.

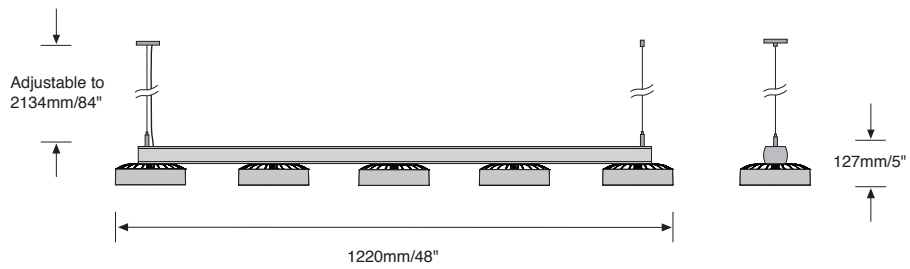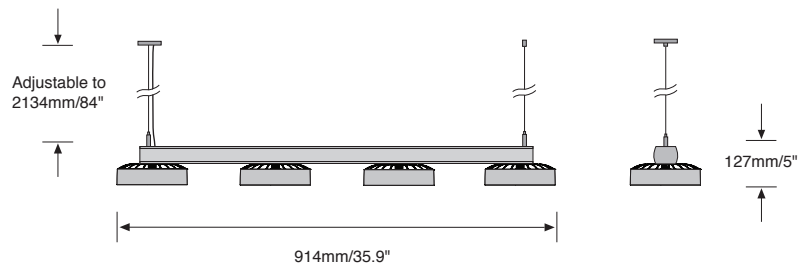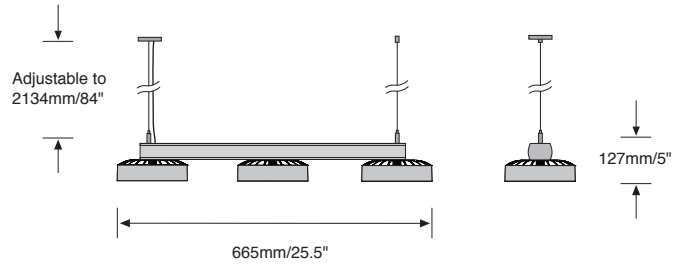

Note: Due to constant changes in LEDs, please check our website for current product specifications.

DIRECT ILLUMINATION PENDANT

A SPECIFY LAMP/LUMINAIRE TYPE

| Code: | Lamp: | CCT: | CRI: | Delivered lms: | Efficacy LPW: | L70 @25°C (77°F): |
|---------|-------------|-------|------|----------------|---------------|-------------------|
| 50 2730 | 3 x 15W LED | 3000K | 90 | 3 x 973 | 60.0 | > 60,000 hrs |
| 50 2731 | 3 x 26W LED | 3000K | 90 | 3 x 1620 | 58.0 | > 60,000 hrs |
| 50 2732 | 3 x 26W LED | 3500K | 80 | 3 x 1990 | 70.4 | > 60,000 hrs |
| 50 2733 | 3 x 26W LED | 4000K | 80 | 3 x 2095 | 74.1 | > 60,000 hrs |
| 50 2740 | 4 x 15W LED | 3000K | 90 | 4 x 973 | 60.0 | > 60,000 hrs |
| 50 2741 | 4 x 26W LED | 3000K | 90 | 4 x 1620 | 58.0 | > 60,000 hrs |
| 50 2742 | 4 x 26W LED | 3500K | 80 | 4 x 1990 | 70.4 | > 60,000 hrs |
| 50 2743 | 4 x 26W LED | 4000K | 80 | 4 x 2095 | 74.1 | > 60,000 hrs |
| 50 2750 | 5 x 15W LED | 3000K | 90 | 5 x 973 | 60.0 | > 60,000 hrs |
| 50 2751 | 5 x 26W LED | 3000K | 90 | 5 x 1620 | 58.0 | > 60,000 hrs |
| 50 2752 | 5 x 26W LED | 3500K | 80 | 5 x 1990 | 70.4 | > 60,000 hrs |
| 50 2753 | 5 x 26W LED | 4000K | 80 | 5 x 2095 | 74.1 | > 60,000 hrs |

B SPECIFY REFLECTOR

ME Medium 24°

WD Wide 50°

C SPECIFY FINISH

BL Black

MS Metallic Silver

WH White

D SPECIFY OPTIONS

CL Clear lens

Example Specification Code: **50 2730 • ME • MS**

Photometric testing performed using LM79 procedures.

Xacara 26W Photometrics


Color Temp: 3500K

Multipliers:
 3000K = 0.83
 4000K = 1.05
 5000K = 1.20

**0° Aiming Angle
 Horizontal FC**

| Medium 25° | H | FC | L | W |
|--------------|------|------------|-----|-----|
| CBCP: 4725 | 5.0 | 189 | 2.2 | 2.2 |
| Lumens: 2006 | 7.5 | 84 | 3.3 | 3.3 |
| LPW: 71.1 | 10.0 | 47 | 4.4 | 4.4 |
| | 12.5 | 30 | 5.5 | 5.5 |
| | 15.0 | 21 | 6.6 | 6.6 |

| Wide 50° | H | FC | L | W |
|--------------|------|-----------|------|------|
| CBCP: 2373 | 5.0 | 95 | 4.7 | 4.7 |
| Lumens: 1990 | 7.5 | 42 | 7.0 | 7.0 |
| LPW: 70.4 | 10.0 | 24 | 9.3 | 9.3 |
| | 12.5 | 15 | 11.7 | 11.7 |
| | 15.0 | 11 | 14.0 | 14.0 |



NOTES:

Beam spread is to 50% center beam candlepower (CBCP)
 H=Distance in feet to floor
 FC=Footcandles on floor or wall at center beam aiming location.
 L =Effective Visual Beam length in feet (50% of maximum footcandle level.)
 W=Effective Visual Beam width in feet (50% of maximum footcandle level.)

Note: Due to constant changes in LEDs, please check our website for current product specifications.