



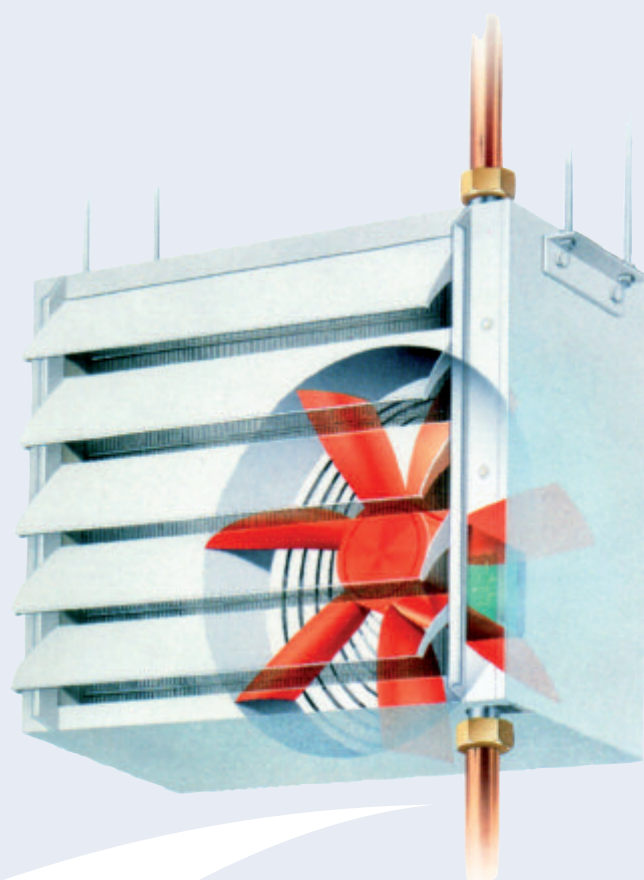

**Uniflow**<sup>TM</sup>  
INDUSTRIAL & COMMERCIAL LARGE-SPACE HEATERS

## ***The Concept***

The latest Uniflow range from Biddle provides a flexible solution to the problem of controllable, cost-effective heating in large space applications.

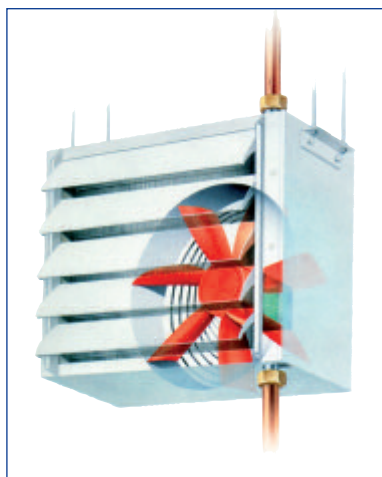

Available for fast delivery, Uniflow unit heaters can be installed in the widest variety of locations from factories and warehouses to exhibition halls and showrooms. The two discharge options - downward or horizontal - meet all likely space configurations. Downward discharge is particularly suited to complex areas where obstacles might impede airflows from a horizontal system. The horizontal louvred discharge units are, however, ideal where directional heating, for example along production lines, is required.

Uniflow technology offers the choice of operating on low, medium or high pressure hot water or steam. This means that most existing factory or commercial units need no major or expensive capital installation before an effective heating solution can be found.

Simple fixing of the compact, fully integrated units requires no special equipment.

## ***Comprehensive Range***

Five sizes with one, two or three row heating elements depending on performance requirement and heating medium.

## ***Flexibility to suit all applications***

Directional heating or full-space comfort - depending on space configuration - with variable mounting heights.

## ***Manufactured Quality***

Designed for long, maintenance-free service and manufactured in Biddle's ISO 9001 production unit, the fully integrated steel-cased units incorporate sealed-bearing motors and specially designed, high-efficiency serpentine coils. A unique feature of the motor technology is that the single speed motor can be converted to two speed operation by the use of an additional delta/star changeover switch fitted in the control circuit.

## ***Technical Specification***

Detailed technical specifications - including emissions/airflow rates; water current/friction; mounting height and throws; and electrical data are included in the following pages.

## ***Model References***

The model reference comprises a code which refines all the information required for identification and manufacture.

### **Example:**

|                                                          |                                                |                                                                                                                    |                                              |
|----------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| Series reference: — <b>7 H 24 2 N 3</b> —                |                                                | Electric supply: 1 = 240 Volt 1 Phase 50 Hz<br>3 = 415 Volt 3 Phase 50 Hz<br>0 = Other than standard voltages etc. |                                              |
| Type: H = Horizontal discharge<br>D = Downward discharge | Unit Size: 5 basic sizes<br>13, 16, 18, 21, 24 | Coil depth: 1 = 1 Row<br>2 = 2 Row<br>3 = 3 Row                                                                    | Fan speed: N = Normal speed<br>L = Low speed |

## Application

There are no hard and fast rules governing the selection of unit types; accepted engineering principles coupled with common sense and sound judgement being the best guide. Assuming that there are no special requirements regarding mounting heights, the first consideration is the usage of the building. It is possible to heat a building with a large number of small units or a small number of large units, both arrangements satisfying the heat requirement. The higher rate or recirculation with the larger number of units will result in better air diffusion and more even temperatures. This application is ideal for buildings having a high occupancy. However, the smaller number of units will be more economical. It is obvious that some compromise has to be achieved.

### Fans/Motors:

Fans are direct driven by squirrel cage, asynchronous induction aluminium motors available for either single or three phase electric supply. Motor enclosures are rated at IP55.

Windings are class 'F' specification. Motors have sealed for life ball bearings requiring no maintenance. All motors are supplied with built-in thermal protection overload contacts (TP). These must be connected to the control circuit of the main contractor as indicated in the wiring diagrams.

The motor rotors and fans are dynamically balanced per ISO 1940. Fan blades are of epoxy painted aluminium.

Fan/motors are supported with a wire guard grille with protection against finger insertion per BS3042. The fan plate is manufactured from epoxy painted steel having a 'bell mouth' inlet.

Three phase motors are dual speed, the normal and low speeds being achieved by wiring the motor in Delta or Star mode respectively. Two speed operation can be achieved by incorporating a change-over switch in the circuit as shown in the wiring diagrams.

Single phase motors are single speed only with separate motors for either normal or low speed.

Explosion proof (increased safety or flame proof) motors can be provided as an alternative for 3 phase electric supply only. These motors are for ignition groups G1, G2 and G3, according to prescription VDE 0171.

The choice between horizontal and downward discharge units is often decided by the mounting height restrictions. The downward discharge can be mounted at higher levels than the equivalent horizontal discharge unit. Downward discharge units are quite useful in projecting heat down into occupied areas regardless of obstacles which would impede the flow of air from a horizontal unit. To reduce stratification within the building, downward discharge units, can be provided without batteries for use as warm air recirculators. Horizontal discharge units are ideal for creating a flow of warm air along exposed walls or for discharging down narrow aisles or production lines, as well as for blanketing doorways and points of high heat loss.

## Specification

### Casing:

'H' Type: The casing is manufactured from zinc electro-plated sheet steel rigidly formed to prevent distortion. Angle supports are drilled for simple attachment to suspension rods. Individually adjusted air deflector louvres are provided on the discharge as standard.

'D' Type: Zinc electro-plated sheet steel casing encloses all working parts. The diffuser assembly is hinged to give access to the fan and motor. Angle supports are drilled for simple attachment to suspension rods. An eight bladed adjustable diffuser is provided for controlled diffusion of the heated air.

Options: Both types can be provided with a spigot suitable for connection of duct-work to the intake. The 'H' type can have a spigotted outlet in lieu of the louvres.

### Finish:

Units are finished in White, epoxy powder paint to RAL 9010.

### Elements:

Specially designed, high efficiency, serpentine coils are fitted to each unit. The coils comprise aluminium fins with spacer collars mechanically bonded to copper primary tubes by an expansion process which provides a high rate of heat transfer coupled with long life. The primary tubes are brazed into steel headers terminating in 1 1/2" BSP male threads. Flanged connections can be provided as an alternative extra. All coils are tested to 30bar (435psi) air under water, and suitable for a working pressure of: 15bar with LTHW <95°C, 12bar with MTHW 95°C-135°C, 10bar with HTHW >135°C, 8bar with Steam. With steam units we recommend the installer fits a means of isolating the steam when fans are off.

### Note:

Size 13 units now have 1" BSP male threads.

## Electrical Data

| 3 Phase electric supply |                    |             |                      |
|-------------------------|--------------------|-------------|----------------------|
| Model No.<br>3 Phase    | Motor rating<br>kW | FLC<br>Amps | Nominal speed<br>rpm |
| 7-13-L3(Y)              | 0.12               | 0.22        | 1200                 |
| 7-13-N3(Δ)              | 0.20               | 0.46        | 1390                 |
| 7-16-L3(Y)              | 0.12               | 0.22        | 1060                 |
| 7-16-N3(Δ)              | 0.20               | 0.47        | 1340                 |
| 7-18-L3(Y)              | 0.21               | 0.39        | 1075                 |
| 7-18-N3(Δ)              | 0.32               | 0.73        | 1320                 |
| 7-21-L3(Y)              | 0.31               | 0.54        | 930                  |
| 7-21-N3(Δ)              | 0.50               | 1.03        | 1270                 |
| 7-24-L3(Y)              | 0.45               | 0.85        | 1040                 |
| 7-24-N3(Δ)              | 0.66               | 1.55        | 1350                 |







| 1 Phase electric supply |                    |             |                      |
|-------------------------|--------------------|-------------|----------------------|
| Model No.<br>1 Phase    | Motor rating<br>kW | FLC<br>Amps | Nominal speed<br>rpm |
| 7-13-L1                 | 0.07               | 0.37        | 850                  |
| 7-13-N1                 | 0.15               | 0.79        | 1385                 |
| 7-16-L1                 | 0.09               | 0.49        | 900                  |
| 7-16-N1                 | 0.22               | 1.05        | 1360                 |
| 7-18-L1                 | 0.11               | 0.56        | 790                  |
| 7-18-N1                 | 0.34               | 1.64        | 1310                 |
| 7-21-L1                 | 0.22               | 1.15        | 870                  |
| 7-21-N1                 | 0.48               | 2.30        | 1276                 |
| 7-24-L1                 | 0.29               | 1.60        | 885                  |
| 7-24-N1                 | 0.65               | 3.02        | 1270                 |

**NOTE:**




When 3 phase motors are used in the dual speed (ΔY) mode, the contactor overloads should be sized as for normal speed rating.

Suggested Wiring Diagrams.

Full model Number 7 13 L1  
Insert H or D  
Insert 1, 2 or 3 Rows

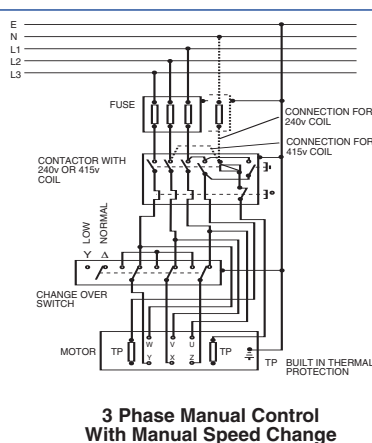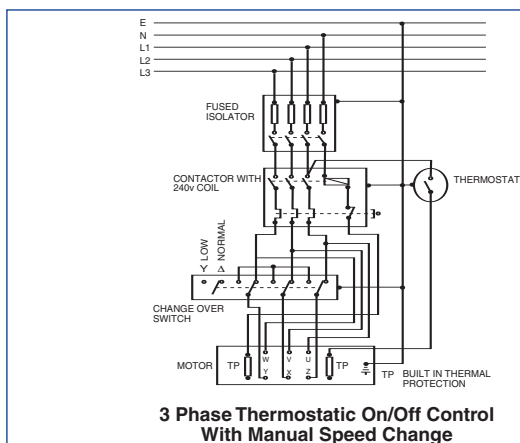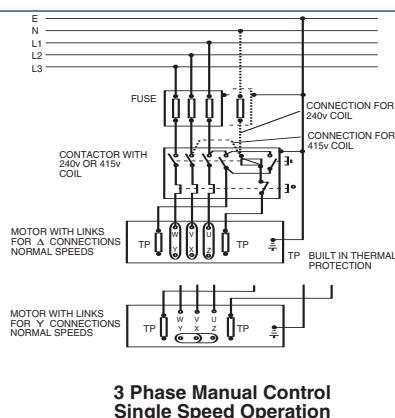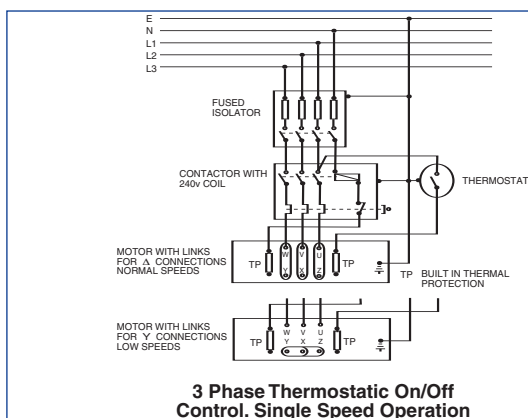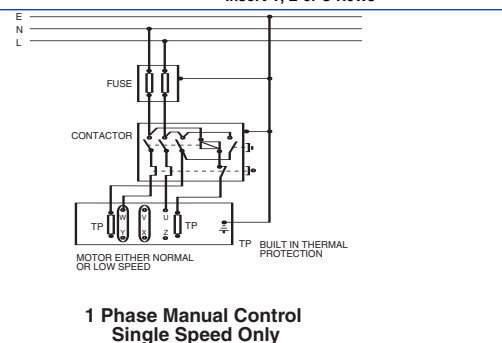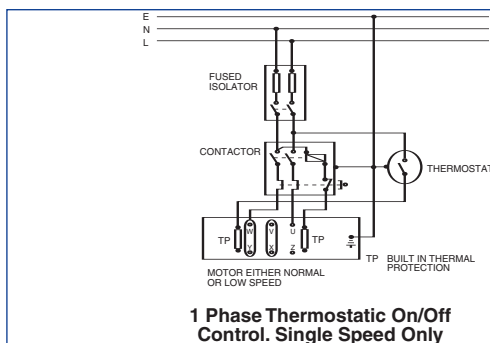

## General Arrangement Drawings

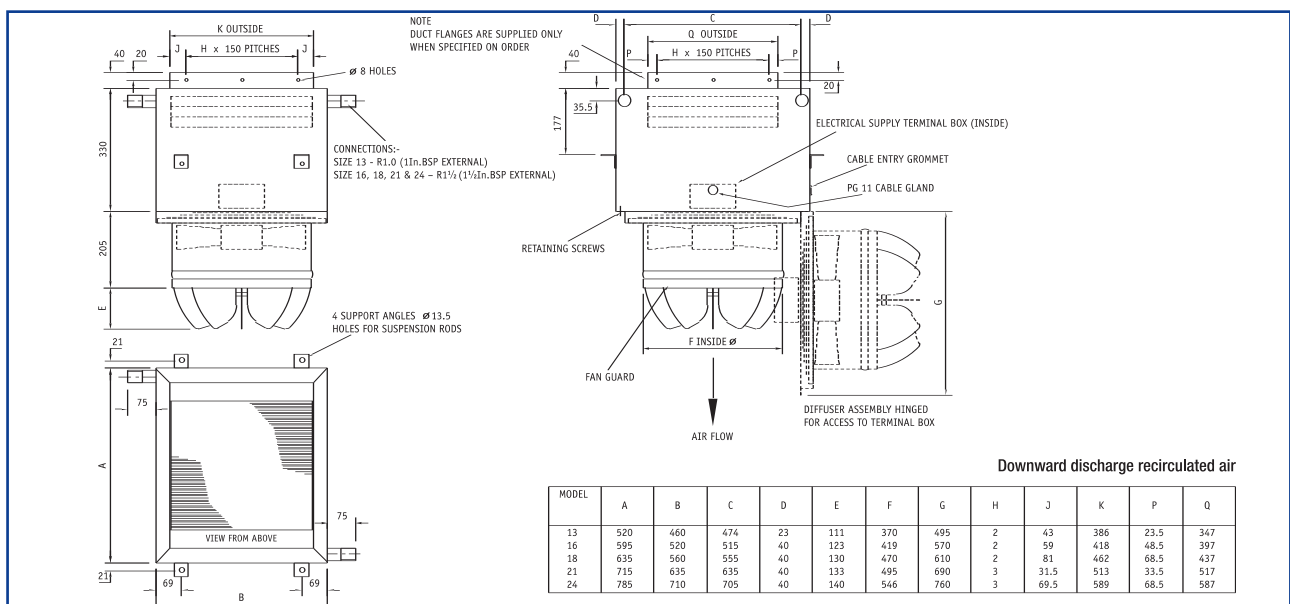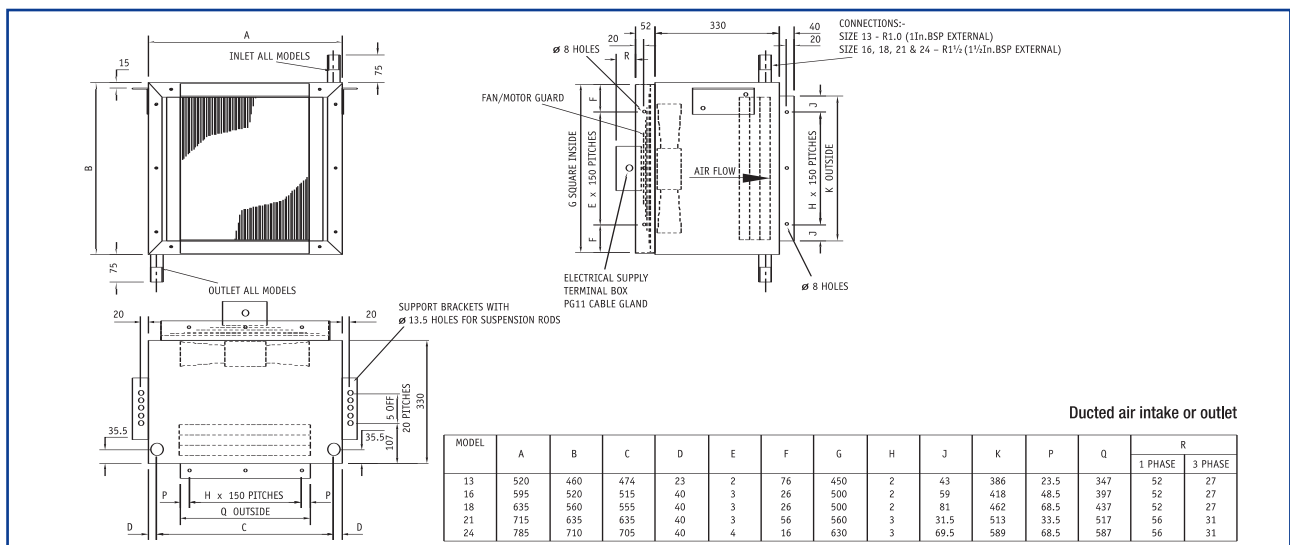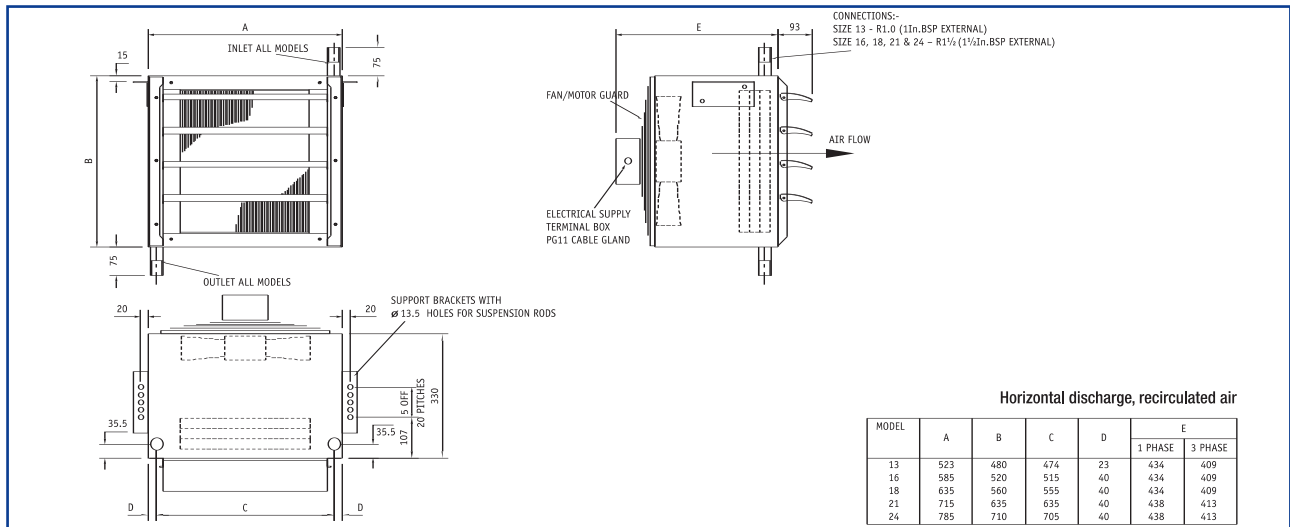

## **LTHW Emissions: in kW for 82.2°C Flow 71.1°C Return. Entering Air 18°C**

| 3 Phase electric supply |                    |               |                        |                 |                  |           |
|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|
| Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C |
| 7-132L3                 | 2                  | 1200          | 51                     | 0.430           | 10.09            | 37.4      |
| 7-132N3                 | 2                  | 1390          | 55                     | 0.520           | 11.22            | 35.9      |
| 7-133L3                 | 3                  | 1200          | 51                     | 0.370           | 13.00            | 47.1      |
| 7-133N3                 | 3                  | 1390          | 55                     | 0.460           | 15.00            | 45.0      |
| 7-162L3                 | 2                  | 1060          | 55                     | 0.595           | 14.70            | 38.5      |
| 7-162N3                 | 2                  | 1340          | 58                     | 0.750           | 16.75            | 36.5      |
| 7-163L3                 | 3                  | 1060          | 55                     | 0.515           | 18.78            | 48.2      |
| 7-163N3                 | 3                  | 1340          | 58                     | 0.675           | 22.43            | 45.5      |
| 7-182L3                 | 2                  | 1075          | 57                     | 0.795           | 19.00            | 37.8      |
| 7-182N3                 | 2                  | 1320          | 61                     | 0.995           | 21.63            | 36.0      |
| 7-183L3                 | 3                  | 1075          | 57                     | 0.695           | 24.80            | 47.6      |
| 7-183N3                 | 3                  | 1320          | 61                     | 0.908           | 29.35            | 44.8      |
| 7-212L3                 | 2                  | 930           | 58                     | 1.125           | 26.35            | 37.4      |
| 7-212N3                 | 2                  | 1270          | 64                     | 1.357           | 29.35            | 35.9      |
| 7-213L3                 | 3                  | 930           | 58                     | 0.930           | 34.00            | 48.3      |
| 7-213N3                 | 3                  | 1270          | 64                     | 1.222           | 40.30            | 45.3      |
| 7-242L3                 | 2                  | 1040          | 64                     | 1.515           | 36.30            | 37.9      |
| 7-242N3                 | 2                  | 1350          | 69                     | 2.007           | 42.65            | 35.6      |
| 7-243L3                 | 3                  | 1040          | 64                     | 1.370           | 47.95            | 47.0      |
| 7-243N3                 | 3                  | 1350          | 69                     | 1.869           | 58.10            | 43.8      |

| 1 Phase electric supply |                    |               |                        |                 |                  |           |
|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|
| Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C |
| 7-132L1                 | 2                  | 850           | 48                     | 0.326           | 8.60             | 39.9      |
| 7-132N1                 | 2                  | 1385          | 54                     | 0.520           | 11.22            | 35.9      |
| 7-133L1                 | 3                  | 850           | 48                     | 0.292           | 11.20            | 49.8      |
| 7-133N1                 | 3                  | 1385          | 54                     | 0.460           | 15.00            | 45.0      |
| 7-162L1                 | 2                  | 900           | 50                     | 0.500           | 13.30            | 40.0      |
| 7-162N1                 | 2                  | 1360          | 58                     | 0.750           | 16.75            | 36.5      |
| 7-163L1                 | 3                  | 900           | 50                     | 0.430           | 16.70            | 50.2      |
| 7-163N1                 | 3                  | 1360          | 58                     | 0.675           | 22.43            | 45.5      |
| 7-182L1                 | 2                  | 790           | 52                     | 0.580           | 15.80            | 40.6      |
| 7-182N1                 | 2                  | 1310          | 60                     | 0.995           | 21.63            | 36.0      |
| 7-183L1                 | 3                  | 790           | 52                     | 0.510           | 20.25            | 50.9      |
| 7-183N1                 | 3                  | 1310          | 60                     | 0.908           | 29.35            | 44.8      |
| 7-212L1                 | 2                  | 870           | 56                     | 1.000           | 24.60            | 38.4      |
| 7-212N1                 | 2                  | 1276          | 63                     | 1.357           | 29.35            | 35.9      |
| 7-213L1                 | 3                  | 870           | 56                     | 0.865           | 32.40            | 49.0      |
| 7-213N1                 | 3                  | 1276          | 63                     | 1.222           | 40.30            | 45.3      |
| 7-242L1                 | 2                  | 885           | 49                     | 1.285           | 33.15            | 39.4      |
| 7-242N1                 | 2                  | 1270          | 68                     | 2.007           | 42.65            | 35.6      |
| 7-243L1                 | 3                  | 885           | 49                     | 1.140           | 42.70            | 49.0      |
| 7-243N1                 | 3                  | 1270          | 68                     | 1.869           | 58.10            | 43.8      |

### **LTHW - Factors to be applied to emissions for other operating conditions**

| Water flow Temp °C | Water temperature drop 11.1°C |       |       |       |       |       |  | Water temperature drop 16.7°C |       |       |       |       |       |  | Water temperature drop 22.2°C |       |       |       |       |       |  |
|--------------------|-------------------------------|-------|-------|-------|-------|-------|--|-------------------------------|-------|-------|-------|-------|-------|--|-------------------------------|-------|-------|-------|-------|-------|--|
|                    | Entering air temperature °C   |       |       |       |       |       |  | Entering air temperature °C   |       |       |       |       |       |  | Entering air temperature °C   |       |       |       |       |       |  |
|                    | -1                            | 12    | 15    | 18    | 21    | 24    |  | -1                            | 12    | 15    | 18    | 21    | 24    |  | -1                            | 12    | 15    | 18    | 21    | 24    |  |
| 60                 | 0.939                         | 0.696 | 0.641 | 0.587 | 0.533 | 0.480 |  | 0.855                         | 0.622 | 0.570 | 0.518 | 0.466 | 0.416 |  | 0.785                         | 0.560 | 0.509 | 0.459 | 0.409 | 0.360 |  |
| 65                 | 1.034                         | 0.789 | 0.733 | 0.678 | 0.623 | 0.569 |  | 0.946                         | 0.711 | 0.658 | 0.605 | 0.552 | 0.501 |  | 0.874                         | 0.646 | 0.594 | 0.543 | 0.492 | 0.442 |  |
| 70                 | 1.131                         | 0.882 | 0.826 | 0.770 | 0.715 | 0.660 |  | 1.039                         | 0.800 | 0.747 | 0.693 | 0.640 | 0.587 |  | 0.963                         | 0.732 | 0.680 | 0.628 | 0.577 | 0.526 |  |
| 75                 | 1.228                         | 0.977 | 0.920 | 0.864 | 0.807 | 0.752 |  | 1.113                         | 0.891 | 0.837 | 0.782 | 0.729 | 0.675 |  | 1.054                         | 0.820 | 0.767 | 0.715 | 0.663 | 0.611 |  |
| 80                 | 1.326                         | 1.073 | 1.015 | 0.958 | 0.901 | 0.845 |  | 1.226                         | 0.983 | 0.928 | 0.873 | 0.819 | 0.764 |  | 1.145                         | 0.909 | 0.856 | 0.803 | 0.750 | 0.698 |  |
| 82.2               | 1.369                         | 1.115 | 1.057 | 1.000 | 0.943 | 0.886 |  | 1.268                         | 1.024 | 0.968 | 0.913 | 0.858 | 0.804 |  | 1.186                         | 0.949 | 0.895 | 0.842 | 0.789 | 0.736 |  |
| 85                 | 1.425                         | 1.169 | 1.111 | 1.054 | 0.996 | 0.939 |  | 1.321                         | 1.076 | 1.020 | 0.965 | 0.910 | 0.855 |  | 1.237                         | 0.999 | 0.945 | 0.892 | 0.838 | 0.785 |  |
| 90                 | 1.524                         | 1.267 | 1.208 | 1.150 | 1.092 | 1.034 |  | 1.417                         | 1.170 | 1.113 | 1.057 | 1.002 | 0.946 |  | 1.330                         | 1.090 | 1.036 | 0.981 | 0.927 | 0.874 |  |
| 95                 | 1.624                         | 1.365 | 1.306 | 1.247 | 1.189 | 1.131 |  | 1.513                         | 1.264 | 1.207 | 1.151 | 1.095 | 1.039 |  | 1.424                         | 1.182 | 1.127 | 1.072 | 1.018 | 0.963 |  |

NOTE:

- When operating on water and air conditions involving low duty correction factors (especially on large water temperature drops) check that the water flow rates do not fall below the minimums stated in the following tables to avoid streamline flow conditions resulting in rapid deterioration of heat transfer.
- When applying emission factors check that the leaving air temperature is satisfactory.

$$LAT\ ^\circ C = \frac{\text{Corrected emission kW}}{\text{Airflow rate m}^3/\text{s} \times 1.207} + EAT\ ^\circ C$$

Leaving air temperatures less than 38°C on low speed units or 40°C on normal speed units may give rise to complaints of cold draughts. Air temperatures in excess of 57-60°C should be avoided as the buoyancy will seriously affect mounting heights and throws.

- See page 10 for air flows against external pressure and emission factors.

$$\text{Waterflow rate Kg/s} = \frac{\text{kW}}{\text{td} \times \text{Cf}}$$

Where:

kW = Corrected heat emission

td = Water temperature drop °K

Cf = Specific heat capacity of water kJ/kg °K

| Unit size | Minimum flow rate in Kg/s for 2 and 3 row elements |       |       |       |       |
|-----------|----------------------------------------------------|-------|-------|-------|-------|
|           | mean water temperature °C                          |       |       |       |       |
|           | 90                                                 | 80    | 70    | 60    | 50    |
| 13        | 0.039                                              | 0.045 | 0.051 | 0.059 | 0.069 |
| 16        | 0.048                                              | 0.054 | 0.062 | 0.072 | 0.084 |
| 18        | 0.053                                              | 0.059 | 0.068 | 0.078 | 0.092 |
| 21        | 0.061                                              | 0.069 | 0.079 | 0.091 | 0.107 |
| 24        | 0.070                                              | 0.079 | 0.090 | 0.104 | 0.122 |
| Cf        | 4.208                                              | 4.198 | 4.191 | 4.185 | 4.182 |

## MTHW Emissions: in kW for 115.5°C Flow 93.3°C Return. Entering Air 18°C

| 3 Phase electric supply |                    |               |                        |                 |                  |           | 1 Phase electric supply |                    |               |                        |                 |                  |           |
|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|
| Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C | Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C |
| 7-132L3                 | 2                  | 1200          | 51                     | 0.430           | 14.65            | 46.2      | 7-132L1                 | 2                  | 850           | 48                     | 0.326           | 12.50            | 49.8      |
| 7-132N3                 | 2                  | 1390          | 55                     | 0.520           | 16.35            | 44.0      | 7-132N1                 | 2                  | 1385          | 54                     | 0.520           | 16.35            | 44.0      |
| 7-133L3                 | 3                  | 1200          | 51                     | 0.370           | 18.90            | 60.3      | 7-133L1                 | 3                  | 850           | 48                     | 0.292           | 16.25            | 64.1      |
| 7-133N3                 | 3                  | 1390          | 55                     | 0.460           | 21.75            | 57.2      | 7-133N1                 | 3                  | 1385          | 54                     | 0.460           | 21.75            | 57.2      |
| 7-162L3                 | 2                  | 1060          | 55                     | 0.595           | 21.40            | 47.8      | 7-162L1                 | 2                  | 900           | 50                     | 0.500           | 19.38            | 50.1      |
| 7-162N3                 | 2                  | 1340          | 58                     | 0.750           | 24.30            | 44.8      | 7-162N1                 | 2                  | 1360          | 58                     | 0.750           | 24.30            | 44.8      |
| 7-163L3                 | 3                  | 1060          | 55                     | 0.515           | 27.40            | 62.1      | 7-163L1                 | 3                  | 900           | 50                     | 0.430           | 24.35            | 46.9      |
| 7-163N3                 | 3                  | 1340          | 58                     | 0.675           | 32.55            | 58.0      | 7-163N1                 | 3                  | 1360          | 58                     | 0.675           | 32.55            | 58.0      |
| 7-182L3                 | 2                  | 1075          | 57                     | 0.795           | 27.65            | 46.8      | 7-182L1                 | 2                  | 790           | 52                     | 0.580           | 23.10            | 51.0      |
| 7-182N3                 | 2                  | 1320          | 61                     | 0.995           | 31.45            | 44.2      | 7-182N1                 | 2                  | 1310          | 60                     | 0.995           | 31.45            | 44.2      |
| 7-183L3                 | 3                  | 1075          | 57                     | 0.695           | 35.95            | 60.9      | 7-183L1                 | 3                  | 790           | 52                     | 0.510           | 29.53            | 66.0      |
| 7-183N3                 | 3                  | 1320          | 61                     | 0.908           | 42.60            | 56.9      | 7-183N1                 | 3                  | 1310          | 60                     | 0.908           | 42.60            | 56.9      |
| 7-212L3                 | 2                  | 930           | 58                     | 1.125           | 38.40            | 46.3      | 7-212L1                 | 2                  | 870           | 56                     | 1.000           | 35.80            | 47.7      |
| 7-212N3                 | 2                  | 1270          | 64                     | 1.357           | 42.50            | 43.9      | 7-212N1                 | 2                  | 1276          | 63                     | 1.357           | 42.50            | 43.9      |
| 7-213L3                 | 3                  | 930           | 58                     | 0.930           | 49.00            | 61.7      | 7-213L1                 | 3                  | 870           | 56                     | 0.865           | 47.00            | 63.0      |
| 7-213N3                 | 3                  | 1270          | 64                     | 1.222           | 58.65            | 57.8      | 7-213N1                 | 3                  | 1276          | 63                     | 1.222           | 58.65            | 57.8      |
| 7-242L3                 | 2                  | 1040          | 64                     | 1.515           | 52.62            | 46.8      | 7-242L1                 | 2                  | 885           | 49                     | 1.285           | 48.00            | 48.9      |
| 7-242N3                 | 2                  | 1350          | 69                     | 2.007           | 61.95            | 43.6      | 7-242N1                 | 2                  | 1270          | 68                     | 2.007           | 61.95            | 43.6      |
| 7-243L3                 | 3                  | 1040          | 64                     | 1.370           | 69.60            | 60.1      | 7-243L1                 | 3                  | 885           | 49                     | 1.140           | 62.05            | 63.1      |
| 7-243N3                 | 3                  | 1350          | 69                     | 1.869           | 84.55            | 55.5      | 7-243N1                 | 3                  | 1270          | 68                     | 1.869           | 84.55            | 55.5      |

## MTHW - Factors to be applied to emissions for other operating conditions

| Water flow Temp °C | Water temperature drop 16.7°K |       |       |       |       |       | Water temperature drop 22.2°K |       |       |       |       |       | Water temperature drop 33.3°K |       |       |       |       |       |
|--------------------|-------------------------------|-------|-------|-------|-------|-------|-------------------------------|-------|-------|-------|-------|-------|-------------------------------|-------|-------|-------|-------|-------|
|                    | Entering air temperature °C   |       |       |       |       |       | Entering air temperature °C   |       |       |       |       |       | Entering air temperature °C   |       |       |       |       |       |
|                    | -1                            | 12    | 15    | 18    | 21    | 24    | -1                            | 12    | 15    | 18    | 21    | 24    | -1                            | 12    | 15    | 18    | 21    | 24    |
| 100                | 1.108                         | 0.936 | 0.896 | 0.857 | 0.818 | 0.779 | 1.045                         | 0.878 | 0.839 | 0.801 | 0.763 | 0.726 | 0.939                         | 0.779 | 0.742 | 0.706 | 0.670 | 0.634 |
| 105                | 1.176                         | 1.002 | 0.963 | 0.923 | 0.884 | 0.845 | 1.111                         | 0.942 | 0.903 | 0.865 | 0.827 | 0.789 | 1.002                         | 0.840 | 0.803 | 0.767 | 0.730 | 0.694 |
| 110                | 1.244                         | 1.068 | 1.028 | 0.988 | 0.949 | 0.910 | 1.177                         | 1.006 | 0.968 | 0.929 | 0.890 | 0.852 | 1.065                         | 0.902 | 0.865 | 0.828 | 0.791 | 0.754 |
| 115.5              | 1.319                         | 1.142 | 1.102 | 1.062 | 1.022 | 0.982 | 1.249                         | 1.075 | 1.039 | 1.000 | 0.961 | 0.923 | 1.135                         | 0.971 | 0.933 | 0.896 | 0.859 | 0.822 |
| 120                | 1.380                         | 1.203 | 1.163 | 1.122 | 1.082 | 1.042 | 1.309                         | 1.137 | 1.098 | 1.059 | 1.019 | 0.981 | 1.192                         | 1.027 | 0.989 | 0.952 | 0.914 | 0.877 |
| 125                | 1.449                         | 1.270 | 1.230 | 1.189 | 1.149 | 1.108 | 1.376                         | 1.203 | 1.163 | 1.124 | 1.085 | 1.045 | 1.256                         | 1.090 | 1.052 | 1.014 | 0.977 | 0.939 |

### NOTE:

- When operating on water and air conditions involving low duty correction factors (especially on large water temperature drops) check that the water flow rates do not fall below the minimums stated in the following tables to avoid streamline flow conditions resulting in rapid deterioration of heat transfer.
- When applying emission factors check that the leaving air temperature is satisfactory.

$$LAT\ ^\circ C = \frac{\text{Corrected emission kW}}{\text{Airflow rate m}^3/\text{s} \times 1.207} + EAT\ ^\circ C$$

Leaving air temperatures less than 38°C on low speed units or 40°C on normal speed units may give rise to complaints of cold draughts. Air temperatures in excess of 57-60°C should be avoided as the buoyancy will seriously affect mounting heights and throws.

- See page 10 for air flows against external pressure and emission factors.

$$\text{Waterflow rate Kg/s} = \frac{\text{kW}}{\text{td} \times \text{Cf}}$$

Where:

kW = Corrected heat emission

td = Water temperature drop °K

Cf = Specific heat capacity of water kJ/kg °K

| Unit size | Minimum flow rate in Kg/s for 2 and 3 row elements |       |       |       |       |
|-----------|----------------------------------------------------|-------|-------|-------|-------|
|           | mean water temperature °C                          |       |       |       |       |
|           | 120                                                | 110   | 100   | 90    | 80    |
| 13        | 0.029                                              | 0.032 | 0.035 | 0.039 | 0.045 |
| 16        | 0.035                                              | 0.039 | 0.043 | 0.048 | 0.054 |
| 18        | 0.039                                              | 0.042 | 0.047 | 0.053 | 0.059 |
| 21        | 0.045                                              | 0.049 | 0.055 | 0.061 | 0.069 |
| 24        | 0.051                                              | 0.056 | 0.063 | 0.070 | 0.079 |
| Cf        | 4.248                                              | 4.233 | 4.219 | 4.208 | 4.198 |

## HTHW Emissions: in kW for 165.5°C Flow 132.2°C Return. Entering Air 18°C

| 3 Phase electric supply |                    |               |                        |                 |                  |           | 1 Phase electric supply |                    |               |                        |                 |                  |           |
|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|
| Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C | Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C |
| 7-131L3                 | 1                  | 1200          | 51                     | 0.497           | 12.00            | 38.0      | 7-131L1                 | 1                  | 850           | 48                     | 0.380           | 10.45            | 40.8      |
| 7-131N3                 | 1                  | 1390          | 55                     | 0.600           | 13.10            | 36.0      | 7-131N1                 | 1                  | 1350          | 54                     | 0.600           | 13.10            | 36.0      |
| 7-161L3                 | 1                  | 1060          | 55                     | 0.670           | 17.72            | 39.9      | 7-161L1                 | 1                  | 900           | 50                     | 0.550           | 16.05            | 42.2      |
| 7-161N3                 | 1                  | 1340          | 58                     | 0.830           | 19.55            | 37.5      | 7-161N1                 | 1                  | 1360          | 58                     | 0.830           | 19.55            | 37.5      |
| 7-181L3                 | 1                  | 1075          | 57                     | 0.900           | 22.70            | 38.9      | 7-181L1                 | 1                  | 790           | 52                     | 0.660           | 19.60            | 42.6      |
| 7-181N3                 | 1                  | 1320          | 61                     | 1.123           | 24.05            | 35.7      | 7-181N1                 | 1                  | 1310          | 60                     | 1.123           | 24.05            | 35.7      |
| 7-211L3                 | 1                  | 930           | 58                     | 1.250           | 32.00            | 39.2      | 7-211L1                 | 1                  | 870           | 56                     | 1.095           | 30.15            | 40.8      |
| 7-211N3                 | 1                  | 1270          | 64                     | 1.449           | 34.40            | 37.7      | 7-211N1                 | 1                  | 1276          | 63                     | 1.449           | 34.40            | 37.7      |
| 7-241L3                 | 1                  | 1040          | 64                     | 1.690           | 43.40            | 39.3      | 7-241L1                 | 1                  | 885           | 49                     | 1.425           | 40.01            | 41.3      |
| 7-241N3                 | 1                  | 1350          | 69                     | 2.180           | 48.90            | 36.6      | 7-241N1                 | 1                  | 1270          | 68                     | 2.180           | 48.90            | 36.6      |

## HTHW - Factors to be applied to emissions for other operating conditions

| Water flow Temp °C | Water temperature drop 22.2°K |       |       |       |       |       | Water temperature drop 33.3°K |       |       |       |       |       | Water temperature drop 44.4°K |       |       |       |       |       |
|--------------------|-------------------------------|-------|-------|-------|-------|-------|-------------------------------|-------|-------|-------|-------|-------|-------------------------------|-------|-------|-------|-------|-------|
|                    | Entering air temperature °C   |       |       |       |       |       | Entering air temperature °C   |       |       |       |       |       | Entering air temperature °C   |       |       |       |       |       |
|                    | -1                            | 12    | 15    | 18    | 21    | 24    | -1                            | 12    | 15    | 18    | 21    | 24    | -1                            | 12    | 15    | 18    | 21    | 24    |
| 130                | 0.940                         | 0.826 | 0.800 | 0.774 | 0.749 | 0.723 | 0.860                         | 0.751 | 0.726 | 0.702 | 0.677 | 0.652 | 0.793                         | 0.687 | 0.664 | 0.640 | 0.615 | 0.592 |
| 140                | 1.028                         | 0.913 | 0.887 | 0.861 | 0.835 | 0.809 | 0.945                         | 0.835 | 0.810 | 0.784 | 0.759 | 0.735 | 0.875                         | 0.768 | 0.744 | 0.720 | 0.695 | 0.672 |
| 150                | 1.117                         | 1.001 | 0.975 | 0.948 | 0.922 | 0.896 | 1.030                         | 0.919 | 0.894 | 0.868 | 0.843 | 0.818 | 0.957                         | 0.850 | 0.826 | 0.801 | 0.777 | 0.753 |
| 160                | 1.206                         | 1.090 | 1.063 | 1.036 | 1.010 | 0.983 | 1.116                         | 1.004 | 0.979 | 0.953 | 0.928 | 0.902 | 1.041                         | 0.933 | 0.908 | 0.883 | 0.859 | 0.834 |
| 165.5              | 1.256                         | 1.139 | 1.112 | 1.086 | 1.059 | 1.032 | 1.164                         | 1.051 | 1.026 | 1.000 | 0.974 | 0.949 | 1.088                         | 0.979 | 0.954 | 0.929 | 0.904 | 0.879 |
| 170                | 1.297                         | 1.179 | 1.152 | 1.125 | 1.100 | 1.073 | 1.203                         | 1.090 | 1.064 | 1.039 | 1.013 | 0.987 | 1.126                         | 1.016 | 0.992 | 0.966 | 0.941 | 0.917 |
| 180                | 1.389                         | 1.269 | 1.243 | 1.216 | 1.189 | 1.162 | 1.291                         | 1.177 | 1.151 | 1.125 | 1.099 | 1.073 | 1.211                         | 1.101 | 1.075 | 1.050 | 1.025 | 0.999 |

### NOTE:

- When operating on water and air conditions involving low duty correction factors (especially on large water temperature drops) check that the water flow rates do not fall below the minimums stated in the following tables to avoid streamline flow conditions resulting in rapid deterioration of heat transfer.
- When applying emission factors check that the leaving air temperature is satisfactory.

$$LAT °C = \frac{\text{Corrected emission kW}}{\text{Airflow rate m}^3/\text{s} \times 1.207} + EAT °C$$

Leaving air temperatures less than 38°C on low speed units or 40° C on normal speed units may give rise to complaints of cold draughts. Air temperatures in excess of 57-60° C should be avoided as the buoyancy will seriously affect mounting heights and throws.

- See page 10 for air flows against external pressure and emission factors.

$$\text{Waterflow rate Kg/s} = \frac{\text{kW}}{\text{td} \times \text{Cf}}$$

Where:

kW = Corrected heat emission

td = Water temperature drop °K

Cf = Specific heat capacity of water kJ/kg °K

- 2 Row HTHW Units are now discontinued. For further advice on choosing alternative models, please contact Biddle Air Systems.

| Unit size | Minimum flow rate in Kg/s for 1row elements |       |       |       |       |       |       |  |
|-----------|---------------------------------------------|-------|-------|-------|-------|-------|-------|--|
|           | mean water temperature °C                   |       |       |       |       |       |       |  |
|           | 170                                         | 160   | 150   | 140   | 130   | 120   | 110   |  |
| 13        | 0.020                                       | 0.022 | 0.023 | 0.025 | 0.027 | 0.029 | 0.032 |  |
| 16        | 0.025                                       | 0.027 | 0.028 | 0.030 | 0.033 | 0.035 | 0.039 |  |
| 18        | 0.027                                       | 0.029 | 0.031 | 0.033 | 0.035 | 0.039 | 0.042 |  |
| 21        | 0.032                                       | 0.034 | 0.036 | 0.038 | 0.041 | 0.045 | 0.049 |  |
| 24        | 0.036                                       | 0.039 | 0.041 | 0.044 | 0.047 | 0.051 | 0.056 |  |
| Cf        | 4.380                                       | 4.350 | 4.320 | 4.290 | 4.270 | 4.248 | 4.233 |  |

## Steam Emissions: in kW for 0.5 BARS G Entering Air 18°C

| 3 Phase electric supply |                    |               |                        |                 |                  |           | 1 Phase electric supply |                    |               |                        |                 |                  |           |
|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|-------------------------|--------------------|---------------|------------------------|-----------------|------------------|-----------|
| Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C | Model No.               | Element depth Rows | Fan speed rpm | Approx noise level dBA | Air volume m³/s | Heat emission kW | L.A.T. °C |
| 7-131L3                 | 1                  | 1200          | 51                     | 0.497           | 12.15            | 38.3      | 7-131L1                 | 1                  | 850           | 48                     | 0.380           | 10.55            | 41.0      |
| 7-131N3                 | 1                  | 1390          | 55                     | 0.600           | 13.30            | 36.4      | 7-131N1                 | 1                  | 1350          | 54                     | 0.600           | 13.30            | 36.4      |
| 7-161L3                 | 1                  | 1060          | 55                     | 0.670           | 17.20            | 39.3      | 7-161L1                 | 1                  | 900           | 50                     | 0.550           | 15.53            | 41.4      |
| 7-161N3                 | 1                  | 1340          | 58                     | 0.830           | 19.12            | 37.1      | 7-161N1                 | 1                  | 1360          | 58                     | 0.830           | 19.12            | 37.1      |
| 7-181L3                 | 1                  | 1075          | 57                     | 0.900           | 21.78            | 38.0      | 7-181L1                 | 1                  | 790           | 52                     | 0.660           | 18.58            | 41.3      |
| 7-181N3                 | 1                  | 1320          | 61                     | 1.123           | 23.12            | 35.1      | 7-181N1                 | 1                  | 1310          | 60                     | 1.123           | 23.12            | 35.1      |
| 7-211L3                 | 1                  | 930           | 58                     | 1.250           | 29.95            | 37.9      | 7-211L1                 | 1                  | 870           | 56                     | 1.095           | 27.95            | 39.1      |
| 7-211N3                 | 1                  | 1270          | 64                     | 1.449           | 32.10            | 36.4      | 7-211N1                 | 1                  | 1276          | 63                     | 1.449           | 32.10            | 36.4      |
| 7-241L3                 | 1                  | 1040          | 64                     | 1.690           | 40.00            | 37.6      | 7-241L1                 | 1                  | 885           | 49                     | 1.425           | 36.60            | 39.3      |
| 7-241N3                 | 1                  | 1350          | 69                     | 2.180           | 45.55            | 35.3      | 7-241N1                 | 1                  | 1270          | 68                     | 2.180           | 45.55            | 35.3      |

## Steam - Factors to be applied to emissions for other operating conditions

| Steam pressure bars.g. | Steam Temp °C | Entering air temperature °C |       |       |       |       |       | Steam pressure bars.g. | Steam Temp °C | Entering air temperature °C |       |       |       |       |       |
|------------------------|---------------|-----------------------------|-------|-------|-------|-------|-------|------------------------|---------------|-----------------------------|-------|-------|-------|-------|-------|
|                        |               | -1                          | 12    | 15    | 18    | 21    | 24    |                        |               | -1                          | 12    | 15    | 18    | 21    | 24    |
| 0.25                   | 106.0         | 1.146                       | 1.006 | 0.974 | 0.942 | 0.899 | 0.878 | 3.50                   | 147.9         | 1.594                       | 1.455 | 1.423 | 1.391 | 1.359 | 1.327 |
| 0.50                   | 111.4         | 1.203                       | 1.066 | 1.032 | 1.000 | 0.968 | 0.936 | 4.00                   | 151.9         | 1.637                       | 1.498 | 1.466 | 1.434 | 1.401 | 1.369 |
| 0.75                   | 116.1         | 1.254                       | 1.115 | 1.082 | 1.050 | 1.018 | 0.986 | 4.50                   | 155.5         | 1.676                       | 1.536 | 1.504 | 1.472 | 1.440 | 1.408 |
| 1.00                   | 120.2         | 1.298                       | 1.158 | 1.126 | 1.094 | 1.062 | 1.030 | 5.00                   | 158.8         | 1.711                       | 1.572 | 1.540 | 1.507 | 1.475 | 1.443 |
| 1.50                   | 127.4         | 1.375                       | 1.236 | 1.203 | 1.171 | 1.139 | 1.107 | 6.00                   | 165.0         | 1.777                       | 1.638 | 1.606 | 1.574 | 1.542 | 1.510 |
| 2.00                   | 133.5         | 1.440                       | 1.301 | 1.269 | 1.237 | 1.204 | 1.172 | 7.00                   | 170.4         | 1.835                       | 1.696 | 1.664 | 1.632 | 1.600 | 1.567 |
| 2.50                   | 138.9         | 1.498                       | 1.359 | 1.327 | 1.294 | 1.262 | 1.230 | 8.00                   | 175.4         | 1.889                       | 1.749 | 1.717 | 1.685 | 1.653 | 1.621 |
| 3.00                   | 143.6         | 1.548                       | 1.409 | 1.377 | 1.345 | 1.313 | 1.281 |                        |               |                             |       |       |       |       |       |

All steam unit heaters must be installed to provide a 2° slope of the coil towards the coil outlet. Steam supply must be dry. If using a modulating steam valve a vacuum breaker must be fitted to prevent less than atmospheric pressures within the steam space from holding back condensate. There should be a 1m drop between coil outlet and steam trap. Condensate must not be lifted after the trap other than via the use of a condensate pump. We recommend for all applications that some form of steam isolation/control be employed for when the fans are turned off.

### NOTE:

- When applying emission factors check that the leaving air temperature is satisfactory.

$$LAT \text{ °C} = \frac{\text{Corrected emission kW}}{\text{Airflow rate m}^3/\text{s} \times 1.207} + EAT \text{ °C}$$

Leaving air temperatures less than 38°C on low speed units or 40° C on normal speed units may give rise to complaints of cold draughts. Air temperatures in excess of 57-60° C should be avoided as the buoyancy will seriously affect mounting heights and throws.

- See page 10 for air flows against external pressure and emission factors.

$$\text{Waterflow rate Kg/s} = \frac{\text{kW}}{\text{td} \times \text{Cf}}$$

Where:

kW = Corrected heat emission

td = Water temperature drop °K

Cf = Specific heat capacity of water kJ/kg °K

- 2 Row Steam Units are now discontinued. For further advice on choosing alternative models, please contact Biddle Air Systems.

## Airflow Rates: Against External Air Pressures and Emission Factors

| EXTERNAL AIR PRESSURE |         |                    |               |              |               |              |               |              |               |              |               |
|-----------------------|---------|--------------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Model No.             |         | Element depth Rows | Fan speed rpm | 0 Pa         |               | 25 Pa        |               | 50 Pa        |               | 75 Pa        |               |
| 3 Phase               | 1Phase  |                    |               | Airflow m³/s | Emiss. factor | Airflow m³/s | Emiss. factor | Airflow m³/s | Emiss. factor | Airflow m³/s | Emiss. factor |
| 7-131L3               | 7-131L1 | 1                  | 850           | 0.380        | 1.00          | 0.188        | 0.72          |              |               |              |               |
| 7-131N3               | 7-131N1 | 1                  | 1200          | 0.497        | 1.00          | 0.390        | 0.89          | 0.220        | 0.68          |              |               |
|                       |         | 1                  | 1385          | 0.600        | 1.00          | 0.510        | 0.93          | 0.400        | 0.83          | 0.250        | 0.66          |
|                       | 7-132L1 | 2                  | 850           | 0.326        | 1.00          | 0.157        | 0.66          |              |               |              |               |
| 7-132L3               |         | 2                  | 1200          | 0.430        | 1.00          | 0.330        | 0.86          | 0.180        | 0.61          |              |               |
| 7-132N3               | 7-132N1 | 2                  | 1385          | 0.520        | 1.00          | 0.440        | 0.91          | 0.330        | 0.78          | 0.220        | 0.62          |
|                       | 7-133L1 | 3                  | 850           | 0.292        | 1.00          | 0.142        | 0.63          |              |               |              |               |
| 7-133L3               |         | 3                  | 1200          | 0.370        | 1.00          | 0.280        | 0.84          | 0.150        | 0.56          |              |               |
| 7-133N3               | 7-133N1 | 3                  | 1385          | 0.460        | 1.00          | 0.380        | 0.89          | 0.280        | 0.73          | 0.200        | 0.59          |
| 7-161L3               | 7-161L1 | 1                  | 900           | 0.550        | 1.00          | 0.350        | 0.81          |              |               |              |               |
|                       |         | 1                  | 1060          | 0.670        | 1.00          | 0.510        | 0.88          | 0.220        | 0.59          |              |               |
| 7-161N3               | 7-161N1 | 1                  | 1340          | 0.830        | 1.00          | 0.725        | 0.94          | 0.610        | 0.86          | 0.450        | 0.75          |
|                       | 7-162L1 | 2                  | 900           | 0.500        | 1.00          | 0.285        | 0.73          |              |               |              |               |
| 7-162L3               |         | 2                  | 1060          | 0.595        | 1.00          | 0.440        | 0.84          | 0.200        | 0.54          |              |               |
| 7-162N3               | 7-162N1 | 2                  | 1340          | 0.750        | 1.00          | 0.660        | 0.93          | 0.550        | 0.84          | 0.370        | 0.67          |
|                       | 7-163L1 | 3                  | 900           | 0.430        | 1.00          | 0.250        | 0.71          |              |               |              |               |
| 7-163L3               |         | 3                  | 1060          | 0.515        | 1.00          | 0.365        | 0.80          | 0.180        | 0.51          |              |               |
| 7-163N3               | 7-163N1 | 3                  | 1340          | 0.675        | 1.00          | 0.585        | 0.91          | 0.475        | 0.80          | 0.270        | 0.56          |
| 7-181L3               | 7-181L1 | 1                  | 790           | 0.660        | 1.00          | 0.450        | 0.83          |              |               |              |               |
|                       |         | 1                  | 1075          | 0.900        | 1.00          | 0.740        | 0.91          |              |               |              |               |
| 7-181N3               | 7-181N1 | 1                  | 1310          | 1.123        | 1.00          | 0.977        | 0.94          | 0.816        | 0.86          | 0.586        | 0.74          |
|                       | 7-182L1 | 2                  | 790           | 0.580        | 1.00          | 0.400        | 0.81          |              |               |              |               |
| 7-182L3               |         | 2                  | 1075          | 0.795        | 1.00          | 0.620        | 0.87          |              |               |              |               |
| 7-182N3               | 7-182N1 | 2                  | 1310          | 0.995        | 1.00          | 0.884        | 0.94          | 0.710        | 0.83          | 0.359        | 0.57          |
|                       | 7-183L1 | 3                  | 790           | 0.510        | 1.00          | 0.280        | 0.68          |              |               |              |               |
| 7-183L3               |         | 3                  | 1075          | 0.695        | 1.00          | 0.490        | 0.80          |              |               |              |               |
| 7-183N3               | 7-183N1 | 3                  | 1310          | 0.908        | 1.00          | 0.790        | 0.92          | 0.636        | 0.80          |              |               |
| 7-211L3               | 7-211L1 | 1                  | 870           | 1.095        | 1.00          | 0.890        | 0.91          |              |               |              |               |
|                       |         | 1                  | 930           | 1.250        | 1.00          | 1.050        | 0.92          |              |               |              |               |
| 7-211N3               | 7-211N1 | 1                  | 1270          | 1.449        | 1.00          | 1.354        | 0.97          | 1.236        | 0.93          | 1.071        | 0.87          |
|                       | 7-212L1 | 2                  | 870           | 1.000        | 1.00          | 0.770        | 0.86          |              |               |              |               |
| 7-212L3               |         | 2                  | 930           | 1.125        | 1.00          | 0.730        | 0.78          |              |               |              |               |
| 7-212N3               | 7-212N1 | 2                  | 1270          | 1.357        | 1.00          | 1.258        | 0.96          | 1.159        | 0.92          | 1.000        | 0.84          |
|                       | 7-213L1 | 3                  | 870           | 0.865        | 1.00          | 0.660        | 0.84          |              |               |              |               |
| 7-213L3               |         | 3                  | 930           | 0.930        | 1.00          | 0.610        | 0.77          |              |               |              |               |
| 7-213N3               | 7-213N1 | 3                  | 1270          | 1.220        | 1.00          | 1.114        | 0.94          | 1.022        | 0.89          | 0.882        | 0.81          |
| 7-241L3               | 7-241L1 | 1                  | 885           | 1.425        | 1.00          | 1.170        | 0.91          | 0.800        | 0.76          |              |               |
|                       |         | 1                  | 1040          | 1.690        | 1.00          | 1.455        | 0.93          | 1.185        | 0.85          |              |               |
| 7-241N3               | 7-241N1 | 1                  | 1350          | 2.180        | 1.00          | 2.010        | 0.96          | 1.845        | 0.92          | 1.590        | 0.86          |
|                       | 7-242L1 | 2                  | 885           | 1.285        | 1.00          | 1.040        | 0.89          |              |               |              |               |
| 7-242L3               |         | 2                  | 1040          | 1.515        | 1.00          | 1.320        | 0.93          | 0.960        | 0.77          |              |               |
| 7-242N3               | 7-242N1 | 2                  | 1350          | 2.007        | 1.00          | 1.825        | 0.95          | 1.634        | 0.89          | 1.400        | 0.82          |
|                       | 7-243L1 | 3                  | 885           | 1.140        | 1.00          | 0.930        | 0.88          |              |               |              |               |
| 7-243L3               |         | 3                  | 1040          | 1.370        | 1.00          | 1.150        | 0.89          | 0.850        | 0.74          |              |               |
| 7-243N3               | 7-243N1 | 3                  | 1350          | 1.869        | 1.00          | 1.628        | 0.92          | 1.445        | 0.85          | 1.215        | 0.76          |

### NOTE:

- When applying emission factors check that the leaving air temperature is satisfactory. See notes on pages 6 to 9.
- Check that the water flow rates do not fall below the values given on pages 6 to 8 (especially where low factors and large water temperature drops are involved).

### EXAMPLE:

What will be the emission for a model 7H133N3 uniflow operating against 50 Pa external pressure, when using LTHW 82.2° C flow, 71.1° C return (11.1° C drop) and air entry at -1° C. The standard emission from 3 phase table on page 6 = 15.00kW. The emission correction factor for LTHW 82.2° C flow, 11.1° C drop and EAT -1° C = 1.369. The emission correction factor for this unit operating at 50 Pa external from above table = 0.73. Airflow rate from above table = 0.280m³/s.

∴ Actual emission = 15.00 x 1.369 x 0.73 = 14.99 kW.

Check leaving air temperature

$$= -1^{\circ}\text{C} + \frac{14.99}{0.28 \times 1.207} = 43.3^{\circ}\text{C}$$

Check water flow rate

$$= \frac{14.99}{11.1 \times 4.195} = 0.322 \text{ Kg/s (above minimum)}$$

## Performance Data

### Mounting Heights and Throws: Type H Horizontal Discharge

| Model No. |         | Maximum mounting height in metres for leaving air temp |      | Maximum throw |
|-----------|---------|--------------------------------------------------------|------|---------------|
| 3 Phase   | 1 Phase | 40°C                                                   | 55°C | metres        |
|           | 7H132L1 | 2.7                                                    | 2.1  | 7.7           |
| 7H132L3   |         | 3.0                                                    | 2.4  | 9.7           |
| 7H132N3   | 7H132N1 | 3.2                                                    | 2.6  | 11.4          |
| 7H162L3   | 7H162L1 | 3.1                                                    | 2.2  | 8.7           |
| 7H162N3   | 7H162N1 | 3.5                                                    | 2.6  | 10.8          |
| 7H182L3   | 7H182L1 | 2.9                                                    | 2.0  | 8.0           |
| 7H182N3   | 7H182N1 | 3.6                                                    | 2.6  | 12.2          |
| 7H212L3   | 7H212L1 | 4.1                                                    | 3.1  | 15.4          |
| 7H212N3   | 7H212N1 | 3.8                                                    | 2.8  | 13.0          |
| 7H242L3   | 7H242L1 | 4.2                                                    | 3.1  | 15.1          |
| 7H242N3   | 7H242N1 | 4.5                                                    | 3.5  | 17.5          |
| 7H242L3   | 7H242L1 | 4.1                                                    | 3.0  | 14.8          |
| 7H242N3   | 7H242N1 | 4.4                                                    | 3.3  | 17.5          |
| 7H242N3   | 7H242N1 | 5.0                                                    | 4.2  | 21.8          |

### Water Content kg

| Unit Size | 1 Row | 2 Row | 3 Row |
|-----------|-------|-------|-------|
| 13        | 1.8   | 2.3   | 2.8   |
| 16        | 2.3   | 2.9   | 3.6   |
| 18        | 2.5   | 3.2   | 4.1   |
| 21        | 3.0   | 3.9   | 5.0   |
| 24        | 3.5   | 4.7   | 6.1   |

### Water Pressure Drop kPa

Table A

Basic pressure drops based on water flow rate of 1.0 kg/s

| Unit Size | Element depth |       |       |
|-----------|---------------|-------|-------|
|           | 1 Row         | 2 Row | 3 Row |
| 13        | 7.4           | 10.5  | 13.5  |
| 16        | 5.7           | 8.0   | 10.5  |
| 18        | 5.0           | 7.1   | 9.2   |
| 21        | 4.1           | 5.9   | 7.7   |
| 24        | 3.4           | 5.0   | 6.5   |

Table B

Water temperature Factor

| MWT °C | Factor |
|--------|--------|
| 50     | 1.053  |
| 75     | 1.000  |
| 100    | 0.964  |
| 125    | 0.938  |
| 150    | 0.916  |
| 175    | 0.898  |


### Weight

| Unit Size | Dry Weight (kg) |
|-----------|-----------------|
| 13        | 32              |
| 16        | 36              |
| 18        | 42              |
| 21        | 50              |
| 24        | 58              |

### Mounting Heights and Spread: Type D Downward Discharge

| Model No. |         | Leaving Air Temperature (°C) | Diameter Spread (meters) for mounting heights (meters) for: |      |      |      |      |      |      |      |      |      |
|-----------|---------|------------------------------|-------------------------------------------------------------|------|------|------|------|------|------|------|------|------|
| 3 Phase   | 1 Phase |                              | 2.5                                                         | 3.0  | 3.5  | 4.0  | 4.5  | 5.0  | 6.0  | 7.0  | 8.0  | 9.0  |
|           | 7D132L1 | 40                           | 7.7                                                         | 6.7  | 5.7  | 4.6  |      |      |      |      |      |      |
|           |         | 55                           | 6.7                                                         | 5.5  | 4.3  |      |      |      |      |      |      |      |
| 7D132L3   |         | 40                           | 8.8                                                         | 7.8  | 6.9  | 5.9  | 5.0  |      |      |      |      |      |
|           |         | 55                           | 7.8                                                         | 6.6  | 5.3  | 4.0  |      |      |      |      |      |      |
| 7D132N3   | 7D132N1 | 40                           |                                                             |      |      | 13.3 | 12.0 | 10.5 | 9.2  | 6.5  |      |      |
|           |         | 55                           | 12.5                                                        | 10.2 | 9.6  | 8.1  | 6.8  |      |      |      |      |      |
|           | 7D162L1 | 40                           |                                                             | 8.6  | 7.5  | 6.5  | 5.6  | 4.5  |      |      |      |      |
|           |         | 55                           | 8.5                                                         | 7.3  | 6.2  | 5.0  |      |      |      |      |      |      |
| 7D162L3   |         | 40                           |                                                             | 9.8  | 8.8  | 7.8  | 6.8  | 5.8  |      |      |      |      |
|           |         | 55                           | 9.8                                                         | 8.5  | 7.3  | 6.0  | 4.8  |      |      |      |      |      |
| 7D162N3   | 7D162N1 | 40                           |                                                             |      |      | 15.2 | 13.9 | 12.7 | 11.4 | 8.8  | 6.2  |      |
|           |         | 55                           | 14.7                                                        | 13.1 | 11.8 | 10.3 | 8.9  | 7.4  |      |      |      |      |
|           | 7D182L1 | 40                           |                                                             | 9.6  | 8.6  | 7.5  | 6.5  | 5.4  |      |      |      |      |
|           |         | 55                           |                                                             | 8.2  | 6.9  | 5.7  | 4.5  |      |      |      |      |      |
| 7D182L3   |         | 40                           |                                                             |      | 10.8 | 9.8  | 8.8  | 7.8  | 5.7  |      |      |      |
|           |         | 55                           |                                                             | 10.6 | 9.4  | 8.2  | 7.1  | 5.8  |      |      |      |      |
| 7D182N3   | 7D182N1 | 40                           |                                                             |      | 18.4 | 17.0 | 15.6 | 14.2 | 11.5 | 8.8  | 6.0  |      |
|           |         | 55                           |                                                             | 15.8 | 14.1 | 12.7 | 11.1 | 9.6  | 6.5  |      |      |      |
|           | 7D212L1 | 40                           |                                                             |      |      | 12.0 | 10.9 | 9.9  | 7.8  | 5.8  |      |      |
|           |         | 55                           |                                                             | 12.6 | 11.4 | 10.3 | 9.1  | 7.9  |      |      |      |      |
| 7D212L3   |         | 40                           |                                                             |      |      | 13.5 | 12.5 | 11.4 | 9.4  | 7.3  |      |      |
|           |         | 55                           |                                                             |      | 12.8 | 11.5 | 10.3 | 9.1  | 6.7  |      |      |      |
| 7D212N3   | 7D212N1 | 40                           |                                                             |      |      | 20.6 | 19.2 | 17.8 | 15.0 | 12.2 | 9.4  | 6.6  |
|           |         | 55                           |                                                             |      | 17.6 | 16.0 | 14.5 | 13.0 | 10.0 | 6.9  |      |      |
|           | 7D242L1 | 40                           |                                                             |      |      |      | 14.3 | 13.3 | 11.2 | 9.1  | 7.0  |      |
|           |         | 55                           |                                                             |      |      | 14.5 | 13.4 | 12.3 | 11.0 | 8.6  | 6.2  |      |
| 7D242L3   |         | 40                           |                                                             |      |      |      | 16.9 | 15.8 | 13.7 | 11.7 | 9.6  |      |
|           |         | 55                           |                                                             |      |      | 15.7 | 14.5 | 13.2 | 10.8 | 8.4  |      |      |
| 7D242N3   | 7D242N1 | 40                           |                                                             |      |      |      |      |      | 21.3 | 18.7 | 16.0 | 13.3 |
|           |         | 55                           |                                                             |      |      |      | 21.4 | 20.0 | 18.5 | 15.5 | 12.6 | 9.6  |

Graph C Factor for the water flow rate

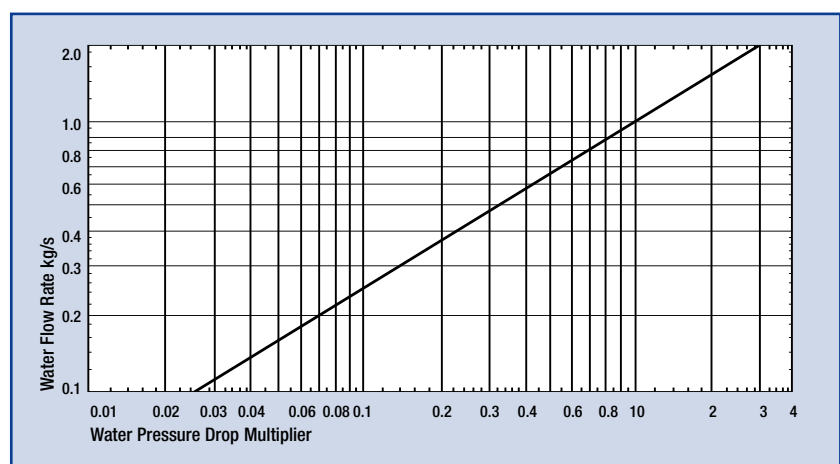

To obtain water pressure drop, multiply basic pressure drop from table A by factors from table B and graph C.

#### NOTE:

- The mounting heights are based on a room temperature of 18°C. Interpolate between the leaving air temperatures.
- The diameter spreads and maximum throws can be affected by site conditions and are therefore only approximate.
- The diameter spreads and maximum throws are for 2 row recirculated air models as indicated. For 1 Row models the stated throws can be increased by 10%, whilst for 3 Row models the throws will be reduced by 10%.

# biddle

- Biddle Air Systems Limited  
St. Mary's Road, Nuneaton  
Warwickshire CV11 5AU

Tel: +44 (0)24 7638 4233  
Fax: +44 (0)24 7637 3621  
Email: [sales@biddle-air.co.uk](mailto:sales@biddle-air.co.uk)  
<http://www.biddle-air.com>

- Biddle B.V.  
P.O. Box 15  
NL-9288 ZG Kootstertille  
The Netherlands

Tel: +31 (0)512 335555  
Fax: +31 (0)512 331424

- Biddle GmbH  
Emil - Hoffmann - Straße 55-59  
50996 Köln  
Germany

Tel: +49 (0)2236 96900  
Fax: +49 (0)2236 969010

- Biddle  
21 Allée de Vendanges  
77183 Croissy Beaubourg  
France


Tel: +33 (0) 1 64 11 15 55  
Fax: +33 (0) 1 64 11 15 66

- Biddle NV  
Business Park E19  
Battelsesteenweg 455E  
2800 Mechelen  
Belgium

Tel: +32 (0) 15 287676  
Fax: +32 (0) 15 287677



**biddle**  
CLIMATE SOLUTIONS

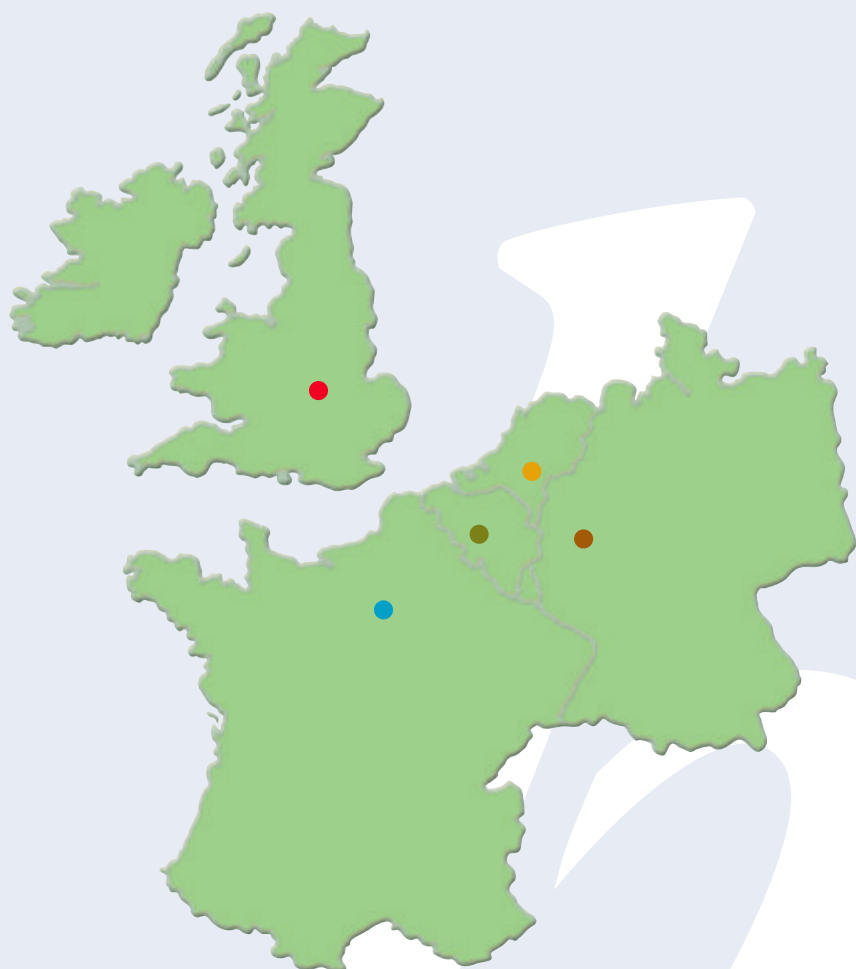

The information given in this brochure is, to the best of our knowledge, correct at the time of going to print. However, Biddle Air Systems are constantly looking at ways of improving their products and services and therefore reserve the right to change without prior notice any of the data contained in this publication.