

STYLE & STYLE DESIGN

Product Specification	Carpet Tiles	
	STYLE	STYLE DESIGN
Pile Yarn	100% BCF Polypropylene	100% BCF Meraklon PP
Construction	Tufted Loop Pile	Tufted Loop Pile
Dyeing Method	Solution	Solution
Primary Backing	Non Woven Polyester	Non Woven Polyester
Secondary Backing	Oxidised Bitumen	Oxidised Bitumen
Pile Weight	405g/m ² ±	550g/m ² ±
Total Weight	4215g/m ² ±	4400g/m ² ±
Pile Height	4mm ±	4mm ±
Total Thickness	6mm nominal	6mm nominal
Gauge	1/10 th	1/10 th
Tile Size	50cm x 50cm	50cm x 50cm

Technical Specification – Overall Performance Rating		
Performance Rating	Contract	
Flammability Classification	BS4790 Low Radius of Effects of Ignition	
Static Electricity	Stroll Test - Less than 2kV	
Castor Chair Rating	Pass, Overall r value 2.9	
Dimensional Stability	Passes Aachen DIN 54318	
Colour Fastness to Light	≥ 6 according to BS 1006 1990 B02	
Colour Fastness to Rubbing	≥ wet 5 ≥ dry 4 - 5 according to BS 1006 x 12 1990	
Colour Fastness to Shampoo	≥ wool 4 - 5 ≥ 5 all other fibres according to BS 1006 UK TB 1990	
Bre global green guide rating	Style Design has been awarded the highest green guide rating A+	

Installation

All carpet tiles should be fitted in accordance with BS5325: 1996. Adequate protection should be allowed under roller castor chairs.

Recommended adhesives

For Permanent Bonding:.....Styccobond F3
For Release Bonding:.....Styccobond F41


Maintenance

Style® & Style Design should be vacuumed regularly, commercial cleaning using the 'Envirodry System' or the 'Hot Water Extraction' method is recommended depending on conditions.

Spot clean immediately on spill.

For further advice on maintenance contact:

Simon Dickinson on **0115 989 9210**

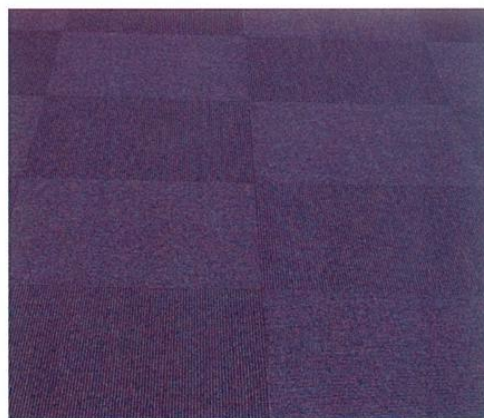

Birch Carpets
Hazel Park Mills
318 Coleford Road
Sheffield
S9 5PH
Tel 0114 243 1230
Fax 0114 243 5118
Email info@birchcarpets.co.uk
Website www.birchcarpets.co.uk



Cert. ENP479 Style Design

