

Gummers Single Control Deck Mounted Basin Mixer

Product Code
H64DMT

Finish/Model Type
Chrome

Weblink

<http://www.specifybristan.com/H64DMT>

- Easy-to-use sequential lever control for temperature and flow
- Complies with HTM64 Type TB H2a
- Safe-touch surface temperature, guarding against burns
- Integral flushing system assists legionella control
- Automatic thermostatic shutoff in the event of hot or cold water supply failure
- Easy access to serviceable parts, reducing down time




Healthcare

Education

Sports & Leisure

Recommended items: visit www.specifybristan.com

Flushing kit

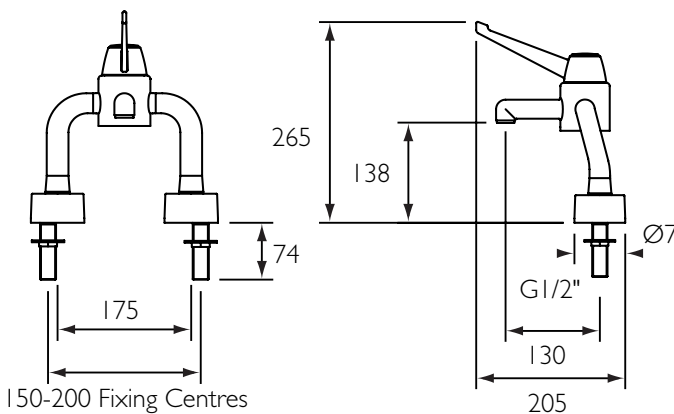

All measurements in mm (unless stated otherwise)
Inlet connection 15mm
Outlet connection 24mm

Performance with open outlet

Pressure Drop	0.1	0.2	0.5	1	2	3	4	5
Flow Rate (without regulator)	4	5.8	9	13	-	-	-	-
Flow Rate (with regulator)	-	-	-	8	9	9	9	9

Call our specifier helpline on **0844 701 6273**

or visit www.specifybristan.com

Bristan, Birch Coppice Business Park,
Dordon, Tamworth, Staffordshire B78 1SG



Product Code

H64DMT

TMV3 Designations of use

- HP-WE High pressure washbasin economy
- LP-WE Low pressure washbasin economy

Pressures

- Minimum pressure drop: 0.1 bar
- Maximum dynamic pressure: 5 bar
- Maximum static pressure: 10 bar

Temperatures

- Factory preset temperature: 43°C
- Maximum hot water supply temperature: 80°C



Call our specifier helpline on **0844 701 6273**

or visit www.specifybristan.com

Bristan, Birch Coppice Business Park,
Dordon, Tamworth, Staffordshire B78 1SG