

Data Sheet

Flood Light 30W



Features

- Energy Saving
- Low heat, No UV, or IR light radiation
- Light source: SMD LED
- Ra>76 for warm white
- Long life time>30,000 hours
- Power consumption up to 30W
- High power driver efficiency > 50%
- Non-Dimmable
- CE, FCC Approved
- IP 65

Typical Application




- Architectural Lighting
- Biological Lighting
- Outdoor Lighting
- Hotel Lighting
- Commercial and Industrial Lighting




Life Span	30,000 hrs
Total Power Consumption	30W
Working Voltage	AC 100-240V
Size	225 x 111 x 185mm
Beam Angle	100°
CRI	Cool White Ra=73 Warm White Ra=76 Natural White Ra=74
Colour Temperature	White 6000K Warm White 3000K Natural White 4500K
Lumens	White - 2180lm Warm White - 1950lm Natural White - 2165lm
Material	Aluminium Alloy
Net Weight	1.74kg
Operational Temperature	-40 to 50°C
Frequency(Hz)	50 Hz

Model Number	FLGLS30C
Model Number	FLGLS30W
Model Number	FLGLS30N



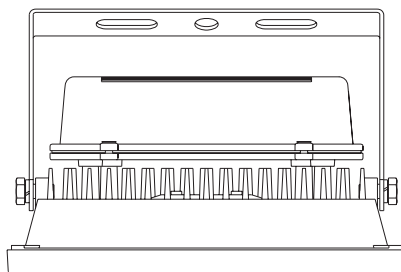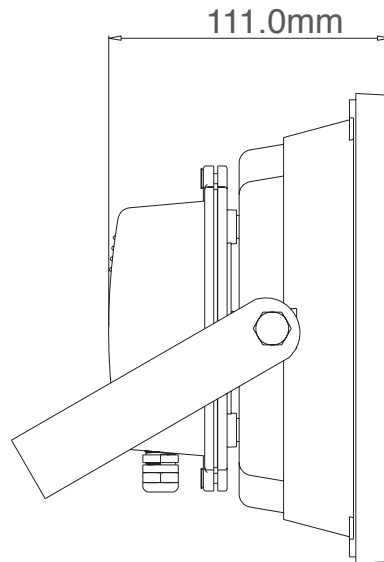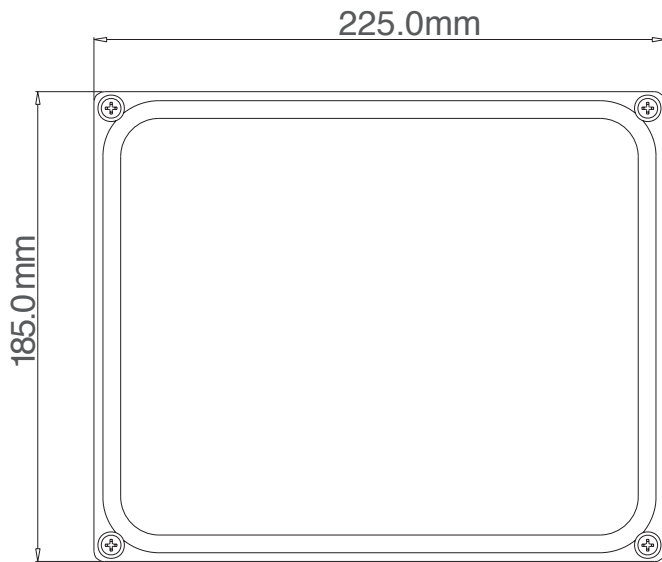

AC100-240V

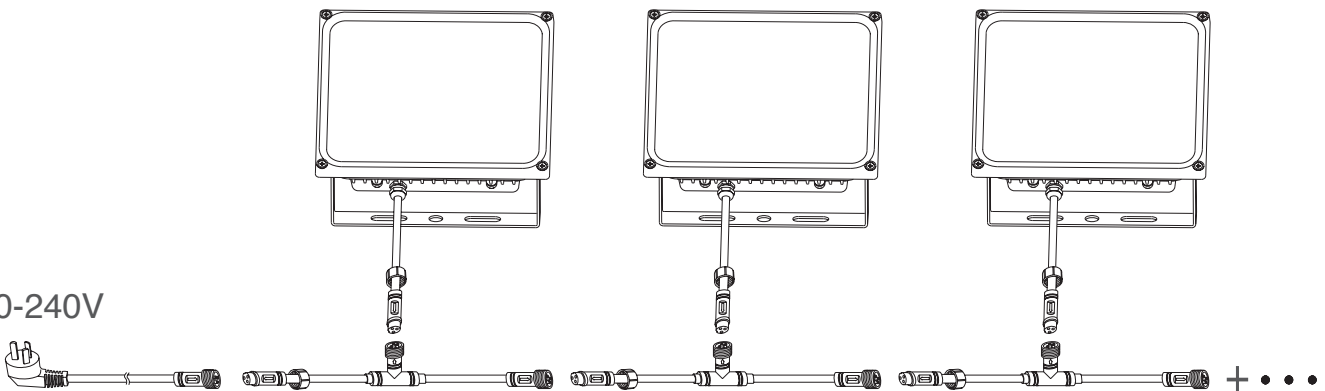

Disclaimer

The information contained in this document is subject to change without notice.

Copyright

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of:
Bri-Tek

Head Office:

Unit D3C, Edgefold Industrial Estate
Smethurst Lane, Farnworth, Bolton, BL4 0JW
Tel: +44 (0) 161 850 0905 Fax: +44 (0) 161 850 0907
Web: www.britektechnologies.co.uk
Email: enquiries@britektechnologies.co.uk