



|                     |              |
|---------------------|--------------|
| Uniclass<br>L725111 | EPIC<br>G611 |
| CI/SFB<br>(74.26)   | X            |

#### DATA

Thermostatic & Pressure Balanced Mixing Valve  
Concealed supply with Riser Kit

|                            |                |
|----------------------------|----------------|
| Maximum Temperature        | 90°            |
| Minimum Pressure           | 0.2 Bar        |
| Maximum Pressure           | 12 Bar         |
| Pressure Differential      | 10 Bar         |
| Normal Control Temperature | 38°            |
| Output Temp Differential   | +/- 1°c        |
| Max Output                 | 8 l/pm @ 3 Bar |

#### MATERIALS

|                              |                              |
|------------------------------|------------------------------|
| Mixer Body                   | BZR Brass With Chrome Finish |
| Handles                      | ABS Plastic                  |
| Connections Inlet Valve Body | G3/4 F BSP                   |

#### FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations  
Anti Scald cut off 0.02 seconds  
Water Saving Showerhead  
Quick & Easy to fit & maintain  
NRV Fitted to Hot & Cold Inlets  
We recommend the use of isolating ball valves with our units

#### SPEC CODES

9215-7500


#### APPROVALS

WRAS D08 TMV3 ISO9001 ISO 14002

#### APPLICATION

Multi user and multi floor applications. Hospital, hotels, accommodation blocks, halls of residence, barracks, gymnasiums,

## 9215 Combi Kit

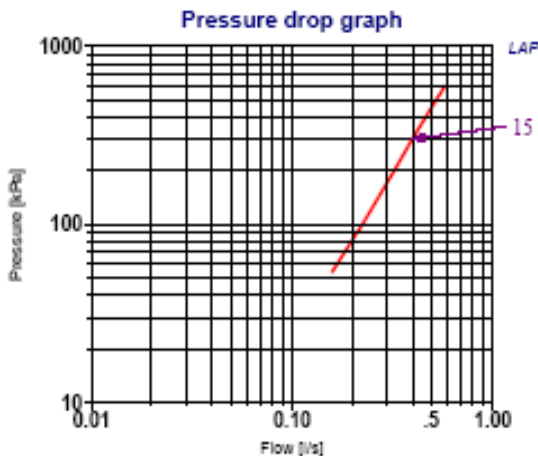

AUTHORISED  
USER NO. 00146

**10 YEAR**  
**CALCIUM**  
**GUARANTEE**

**10 YEAR**  
**PRESSURE**  
**GUARANTEE**

**10 YEAR**  
**TEMPERATURE**  
**GUARANTEE**

**FM Mattsson** **FM Mattsson** **FM Mattsson**

01628 529024

[www.alchallis.com](http://www.alchallis.com)

@ [info@alchallis.com](mailto:info@alchallis.com)



**WRAS**  
**APPROVED**  
**PRODUCT**