


Cavi 120

Type PC Lofthatch

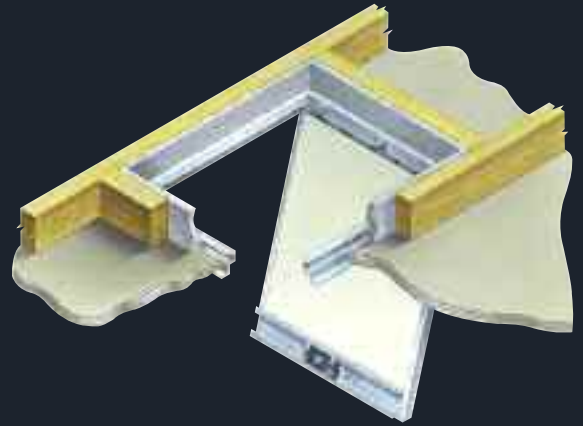

- Two hour fire integrity rating
- Integral latch
- White stove finish
- Insulated door

USE

To provide access with a fire integrity rating of two hours into a roof space.

SOLUTION

The prefix of Cavi 120 denotes this Lofthatch has a fire integrity rating of 120minutes. The downward opening door is supported on a full width zinc coated hinge that provides retention across the entire width of the frame.

The door is secured in the closed position by turning an integral locking bolt accessed via a recessed locking point. Draught strips within the frame compress against the door when locked. The dished steel constructed door retains a fire barrier layer.

When installed the 1.5mm thick frame surround appears almost flush with the ceiling plaster so visual presence is minimised.

SPECIFICATION WORDING

Cavi 120 Type PC Lofthatch with two hour fire integrity rating by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769).

Incorporate within trimmed ceiling joists following lining of trimmed surround and fixing in accordance with manufacturers instructions.

Number.....

PRODUCT NAME - GROUP

Cavi 120 Type PC Lofthatch

DIMENSIONS

Trimmed joists + prep Trim to 775mm x 560mm
then line with p/b or fire board to 755m x 540mm

CLEAR OPENING SIZE

745mm x 530mm

NEW WORK APPLICATIONS

Yes

RETROFIT APPLICATIONS

Yes

MATERIAL

Frame and door Polyurethane fr
Seals Electro galvanized steel

COLOUR

White RAL 9010

EXTRUDES / COMPRESSES UNDER LOAD

N/A

PACK SIZE

Available individually

CFC

CFC Free

ODP

Zero

REGULATION COMPLIANCE

Yes BS 476 Pt 22 - 1987

CAD DOWNLOADS

Yes

DESIGN CONSIDERATIONS

Downward opening door is detachable should its removal be required to aid entry of apparatus into or out of the roof space.

DESIGNERS' COMMENTS

Design of this product formalized following reference to BRE Digest 262/270. NHBC 7.7. Guide to Good Practice. BS476.