

HEXATHERM[®] XFLOOR 700

Superior compressive strength, low water absorption floor insulation




Product Information

CELLECTA's XFLOOR 700 insulation has a superior resistance to long term compression and unrivalled resistance to water absorption, making it ideal for a multitude of commercial, healthcare and industrial applications.


Key Benefits

- 5 times the compressive strength of PiR
- Superior life-long thermal performance
- Closed cell structure
- Very low water absorption
- 100% Recyclable

Technical Information

		XFLOOR 700
Thermal Conductivity EN 12667	W/mK	0.034 ≤80mm 0.036 >81mm
Strength at 10% compression EN 826	kPa	700
Strength at 2% compression EN 1606	kPa	250
Long term water absorption by immersion EN 12087	%	>0.7
Board size	mm	600 x 1250
Standard thickness' (other sizes manufactured to order)	mm	50, 60, 80, 100, 120 140, 160
Edge profile	-	 Shiplap

Third Party Accreditation and Approvals

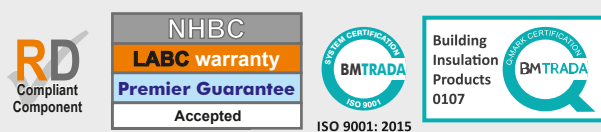

Environmental Credentials

