


STANDARD

PRODUCT DATASHEET



STACKDOOR



STACK TECHNOLOGY

- Small stacking zone at high level.
- More than 80% free airflow through shutter curtain.
- Large maximum width
- Self-locking to prevent lifting.
- No locks and cannot be manually forced open.



TYPICAL APPLICATIONS

- Zoning & Partitioning
- Retail outlets
- Medium risk commercial buildings
- Airports & Stations



OPTIONS

- Stainless Steel or Polyester powder coated to any standard Ral/BS colour.
- High or low duty cycle electrical motors.



STRENGTH THROUGH INNOVATION

Stackdoor Shutters are manufactured in the UK by CGT Security Ltd

STANDARD

PRODUCT DATASHEET



STACKDOOR

APPROVED DIMENSIONS

Minimum width: 1000mm	Maximum width: 20000mm
Minimum height: 500mm	Maximum height: 7000mm

SHUTTER CURTAIN

Solid Steel pins secured into horizontal steel profiles.

BOTTOM RAIL & FRAMES


Reinforced extruded aluminium bottom rail section.
Heavy duty extruded aluminium guide rails anchored direct to the structure.

OPERATION

Motorised to allow controlled ascent and descent.
Tube Motor - Low duty cycle, or where limited to single phase supply.
External Drive Motor - High duty cycle for larger apertures.

CONTROLS

Range of compatible controls including rotary switch, key switch, remote (control) and emergency manual crank.
Safety on close as assessment directs.

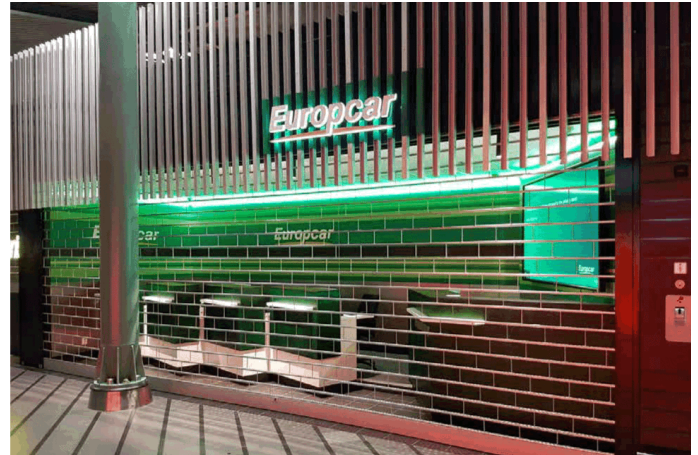

Distributor