

Product Description

A stylish and compact double sided LED exit sign suitable for ceiling or wall mounting. The unit is available as either switchable maintained/non-maintained or DALI self-test non-maintained. The Sirocco is supplied with a Plexi glass screen printed legend plate which offers an impressive 25m viewing distance.




Features


- Surface mounted (wall or ceiling)
- IP40 rating
- Long Life LiFePO4 Batteries
- 25m viewing distance
- Deep discharge protection
- Samsung LED's
- ISO legends as standard

Order Codes - Sirocco

Options	Description
/M3	Maintained - emergency
/NM3	Non - maintained emergency
/DA3	DALI emergency
/WH	White finish

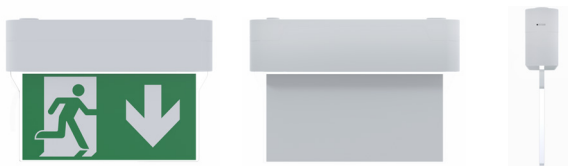

Line Drawing

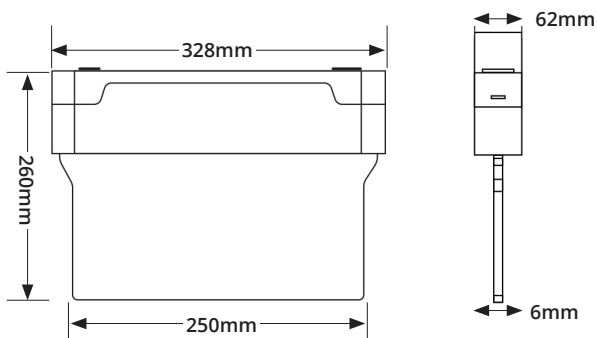

Technical Specification

Supply Voltage	230-240V AC 50/60Hz
Light Source	Samsung LED's
Recharge Period	12 hours - Energy saving charger
Battery size & type - Switchable Maintained	6.4V 1.6Ah LiFePO4 Cells
Battery size & type - DALI-Self Test	9.6V 1.5Ah LiFePO4 Cells
Ambient Temperature	0°C +25°C
Life Time	50,000 Hours
Class	II
Output at 350mA	156 Delivered lumen
Output at 550mA	224 Delivered lumen
Output at 700mA	268 Delivered lumen



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE.