



COLLINGWOOD
LIGHTING




FEATURES & BENEFITS

- › Equivalent to 35W Halogen
- › Ceiling fitting kit included
- › Fit between 3-10 products per 500W mains dimmer

DL SURFACE

Surface-mount, dimmable LED downlight



Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	38°	DL SURFACE F NW	>70Ra	455	57	657
3000K	38°	DL SURFACE F WW	>80Ra	340	43	491

GENERAL

Construction material	Anodised aluminium
Inrush current	15A 0.5ms

WIRING


Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz
-------------------------	--------------------------------------

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	Yes (mains)	2	-	-


ACCESSORIES

Product code	Description
Dimming options	Contact us on 01604 495 151 for more information

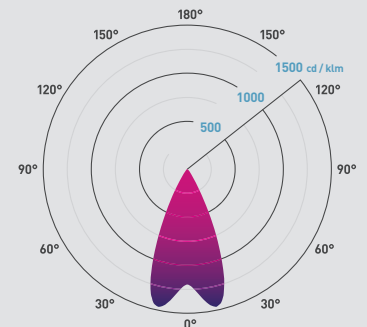

4000K 38°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++
A+
A
C
D
E

874/2012