



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- > Wide 120° general purpose exterior floodlight
- > Ideal for lighting large areas, courtyards, entrances or uplighting trees and buildings
- > Standard version IP65
- > Straight to mains product supplied with 1m flying lead
- > Supplied with tiltable bracket that can be easily adjusted

FL10
100W flood light

- IP65** Ideal for use outdoors
- 100lm/W +** High efficacy
- 3** 3-year extended warranty available

- 120°
- 100W
- 240V
- 180°↓
- <40°C
- 1/40°C
- 2.75kg
- 25,000h
- 65CDM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	120°	FL10BC2X40	>80Ra	10900	109	4488
3000K	120°	FL10BC2X30	>80Ra	10090	100	4154

GENERAL

Construction material	Black painted cast aluminium
Inrush current	31A 0.05ms

WIRING


Cable / flying lead	1m flying lead
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS


Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	No	-	-	-

ACCESSORIES

Product code	Description
There are currently no accessories associated with this product	

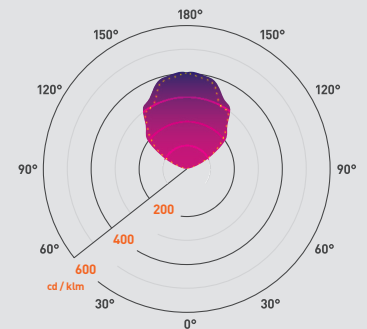

4000K C0/C180 / 4000K C90/C270
Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire.

Energy efficiency scale: A+, A, C, D, E. The scale is marked with A+, A, C, D, E, with A+ and A highlighted in green. A red 'X' is over the C, D, and E categories.

LED logo and CE mark.

874/2012