



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- › Neat and compact, Straight to the mains linear floodlight
- › Complete with wall fixings
- › Mains waterproof connector included
- › Max. 3 on 500W mains dimmer
Max. 5 on 1000W mains dimmer
- › Compatible with many leading lighting control systems



FL200

Dimmable linear LED flood light



Ideal for use outdoors



7-year extended warranty available



Patent information: collingwoodlighting.com/patent

ZONE

L70, B10

35DCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	50°	FL200FNW	>70Ra	1415	67	2300
3000K	50°	FL200FWW	>80Ra	1292	62	2050
2700K NEW	50°	FL200F27*	>80Ra	1260	60	1993

*Available on request, please call our team for lead times and MOQ on 01604 495 151

GENERAL

Construction material	Anodised aluminium (body) stainless steel 316 (bracket)
Inrush current	15A 0.5ms

WIRING


Cable / flying lead	N/A (IP65 waterproof connector)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	Yes (mains)	2	-	-


ACCESSORIES

Product code	Description
Dimming options	Call us on 01604 495151 for more information

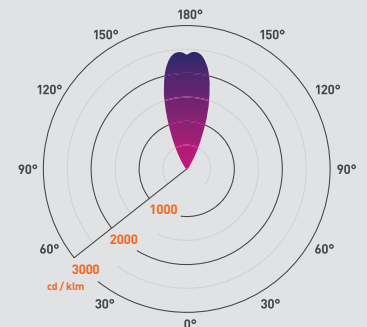

4000K 50°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++
A+
A
C
D
E

874/2012