



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- › Frosted effect for softer tone of light
- › Low profile for easy installation
- › Robust cable for outdoor use
- › Parallel wiring for easier installation and more fittings to a power supply

GL018 C

Small LED marker light

- IP68 Submersible to 9m
- Walk over
- 1 yr 1-year guarantee

- 120°
- 0.5W
- Ø28
- 32°C
- IK07
- ±35°C
- 300g
- 0 ZONE
- 70,000h
- 35DCM

Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	120°	GL018 C NW	>70Ra	3	6	1
3000K	120°	GL018 C WW	>80Ra	3	6	1
Amber	120°	GL018 C AMBER	-	-	-	-
Blue	120°	GL018 C BLUE	-	1	2	1
Green	120°	GL018 C GREEN	-	-	-	-
Red	120°	GL018 C RED	-	-	-	-

GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

WIRING

Cable / flying lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of wiring required	Parallel


LED DRIVERS

Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PS1524	-	Yes	Yes (PDCINT1-10V)	0 (1 when dimming)	1	30
PS5024	-	Yes	Yes (PDCINT1-10V)	0 (1 when dimming)	1	100
PSDIP10024	-	Yes	Yes (1-10V)	0 (1 when dimming)	1	200


ACCESSORIES

Product code	Description
JB1 / JB5 / JB6	IP68 waterproof connectors
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers

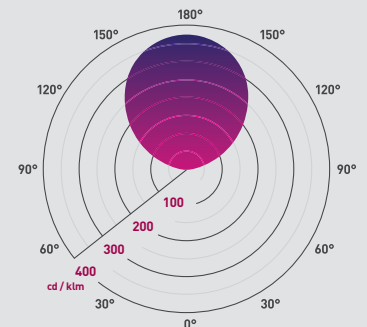

4000K 120°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++
A+
A
C
D
E

874/2012