



COLLINGWOOD  
LIGHTING



FEATURES & BENEFITS

- Can now also be used with a 700mA driver for increased light output
- Theft/vandal-proof. Threaded body fits securely into supplied aluminium tube using tightening key
- Aluminium tube for secure installation in concrete or soft ground environments
- Low profile waterproof ground light. Ideal for decking or by swimming pools

GL019 S TK

1W mini LED ground light threaded kit

- IP68** Submersible to 9m
- Walk over**
- 7-year extended warranty available**

- 12°
- 1W 350mA
- 2W 700mA
- B37
- 32°C
- IK07
- ±35°C
- 100g
- 0 ZONE
- 70,000h L70, B10
- 35DCM

PHOTOMETRICS @25°C				350mA			700mA			
Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m	CRI	lm	lm/W	lx at 1m
4000K	12°	GL019 S TK NW	>80Ra	90	90	1833	>80Ra	130	65	2648
2700K	12°	GL019 S TK 27*	>80Ra	70	70	1425	>80Ra	115	58	2341
Blue	12°	GL019 S TK BLUE	-	10	10	204	-	20	10	407

\*Available on request, please call our team for lead times and MOQ on 01604 495 151

GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

WIRING

Cable / flying lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of wiring required	Series


LED DRIVERS

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	350	Yes	No	1	1	9
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	700	Yes	No	1	3	9


Bathroom zone applicable to fitting only

ACCESSORIES

Product code	Description
JB2 / JB4 / JB6	IP68 waterproof connectors
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types

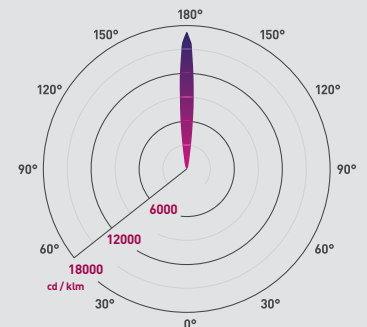

4000K 12°  
Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

874/2012