


Contar Car Park Standard System

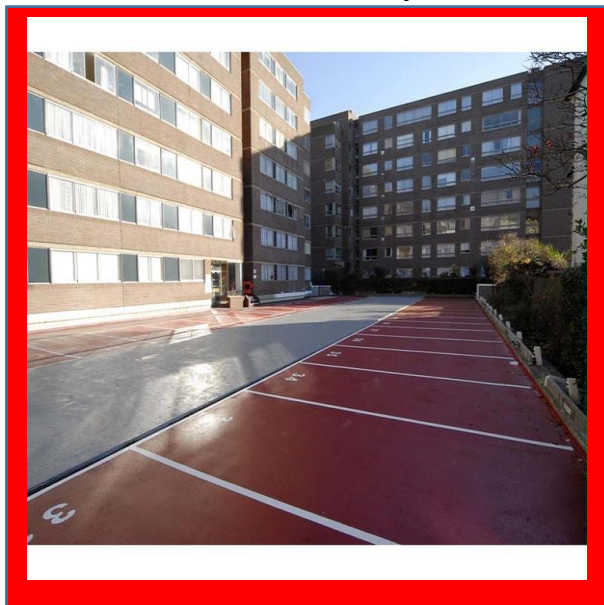

Description

Contar Car Park system is a Methyl Methacrylate resin-based system. Due to its fast curing properties it can be installed rapidly therefore causing minimal disruption. It is ideally suited to open air, ground level car parks, intermediate decks and all other loading bay/ general parking areas. This high-performance system is widely used in retail, leisure & other public venues. Contar Car Park System is suitable for both concrete and asphalt substrates.

System Features & Benefits

- **System cures to full specification in 2 hours**
Minimising disruption enabling rapid refurbishment
- **UV resistant**
Provides crack free performance and colour stability
- **Exceptional bond to both concrete and asphalt substrates**
Exceptional durability and performance.
- **Superb thermal stability**
No softening/degradation during summer months and flexible during winter months
- **Installation temperature range 0°C to +30°C with excellent chemical and road salt resistance**

Installation Services

The installation should only be carried out by a Contar approved contractor with the documented quality assurance scheme. Contact Contar Resins Ltd for details.

Substrate Requirement

Substrate must be dry, free from laitance, dust and other contaminations. Check the relative humidity at ground level and always use the correct Contar substrate primer prior to applying the Contar Car Park system. Contact Contar Resins Ltd for details and technical advice.

Model Specification

Product: Contar Car Park standard

Finish: textured

Overall thickness: 2-3mm

Colour: As per Contar range

Manufacturer: Contar Resins Ltd


(Preparatory work and application in accordance with the manufacturer's instructions)

System Overview

Contar Primer

Contar Body coat RTU (2 coats)

Contar aggregate

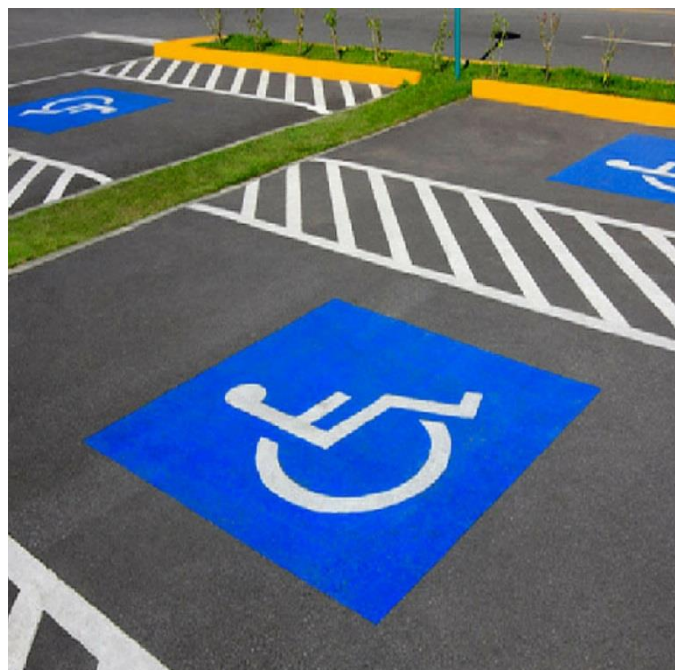

Speed of cure

Pot Life 15-20 mins*

*Pot life & curing times will be dependent on substrate and air temperature.

Finish curing to full specification-2 hours

Materials can be stored unopened for up to 6 months in dry, cool conditions.

Caution-Contar materials have a characteristic odour during application which is nontoxic and non-injurious to health. Ensure adequate ventilation is available. See material safety data sheet for full information or contact Contar technical dept.

Aftercare and Maintenance

The most efficient way of cleaning Contar systems would be to use a rotary scrubber dryer, with the facility to rinse and vacuum. To arrange a free demonstration please call our Technical Services Team.

Mixing & Application

Refer to Contar Resins Ltd installation guide

Standard Colour Range for Car Park System

Black RAL 9011	White RAL 9010	Traffic Purple RAL 4006	Traffic Green RAL 6024
Traffic Yellow RAL 1023	Traffic Blue RAL 5017	Traffic Grey RAL 7043	Mid Grey RAL 7045
Traffic Red RAL 3020	Grass Green RAL 6010		

Note:

Contar Resins Ltd endeavors to ensure that all information and advice given is accurate and correct. However, the company cannot take responsibility for the selection of products for specific applications. Therefore, any prospective customers should satisfy themselves that the product is suitable for the environment in which it will be installed. Accordingly, Contar cannot take responsibility for the selection of a product unsuitable for the application. The information detailed in this communication is liable to change without prior notification. All resin floors are hand applied resulting in a surface texture that can vary. Colours may be different when installed on site due to substrate and installation methods.