

# D166 PN32

## Bronze Gate Valve

Crane gate valves offer the ultimate in dependable service wherever minimum pressure drop is important.

### Materials


PART	MATERIAL	SIZES
Body	Bronze BS EN 1982 CC491K	All
Bonnet	Bronze BS EN 1982 CC491K	All
Stem	Bronze BS EN 1982 CC491K	1/4 - 2
Stem	Bronze BS EN 1982 CC491K	All
Disc	Bronze BS EN 1982 CC491K	All
Packing	Asbestos Free	All
Gland	Brass BS EN 12164 CW614N	All
Packing Nut	Brass BS EN 12164 CW614N	1/4 - 2
Packing Nut	Bronze BS EN 1982 CC491K	2 1/2 & 3
Handwheel	Aluminium	All
ID Plate	Aluminium	All
Handwheel Nut	Brass BS EN 12164 CW614N	All



D166

General Valves

### Dimensional Drawing

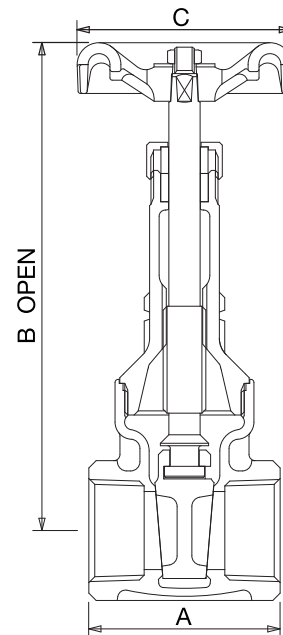

### Dimensions & Weights

SIZE (inch)	WEIGHT (kg)	A (mm)	B (mm)	C (mm)
1/4	0.32	46	126	45
3/8	0.31	46	126	45
1/2	0.46	51	129	52
3/4	0.72	55	159	65
1	1.1	63	189	70
1 1/4	1.5	71	219	78
1 1/2	2.25	73	246	92
2	3.2	84	301	92
2 1/2	5.8	105	369	134
3	8.52	111	416	134

### Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 100	198
PRESSURE (BAR)	20	9

Intermediate pressure ratings shall be determined by interpolation.

**PRESSURE RATING:** PN32

**TEMPERATURE OPERATING RANGE:** -10 to 198°C

**UK END CONNECTION:** Taper threaded to BS EN 10226-2 (ISO 7-1) formerly BS 21

**US END CONNECTION:** ANSI B1.20.1 (please add suffix AT to denote American Thread)

**OPERATOR:** Handwheel.

Gate valves are best for services that require infrequent valve operation, and where the disc is kept either fully opened or fully closed. They are not practical for throttling.

**SPECIFICATION:** Valves are manufactured in accordance with BS EN 12288: 2010 PN32 for Series B ratings. Rising Stem.

This valve is not suitable for use on group 1 gases or unstable fluids, as defined by the Pressure Equipment Directive 97/23/EC.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.