



PRODUCT CHARACTERISTICS

Gel structure. Revolutionary product to remove old layers of paint and lacquer on surfaces of stone, asphalt, metal and wood.

The aerosol should be stored at room temperature before use.

Application temperature 5 - 30°C.

APPLICATION

Shake before use. Before use, test the compatibility of the surface. Apply generously and allow to take effect. The time to take effect depends on the quality and age of the paint or lacquer to be removed. Then, remove with a tool appropriate for this purpose. On stubborn deposits you need to repeat the process.

Peel Tec®

SAY GOODBYE TO THOSE TEDIOUS AND UNSAFE METHODS OF REMOVING PAINT SUCH AS HEAT, HARSH SOLVENTS AND MECHANICAL METHODS.

- Peel Tec is very easy to use from a handy aerosol, with a unique nozzle, delivering the right amount of product onto any given surface.
- Peel Tec acts fast. Simply spray and, in less than ten minutes, watch that paint peel away. INCREDIBLE!
- Due to Peel Tec's unique formulation it will not damage the base material and prepares the surface perfectly for re-coating.
- Peel Tec is unbelievably versatile and works on almost all materials with the same clinical efficiency.

THIS UNIQUE PRODUCT WILL REDUCE LABOUR CONSIDERABLY WITH NO DANGEROUS VAPOURS OR ACCIDENTAL SCRATCHING.



C-TEC NI LTD.
6, Ashtree Ind. Park, Newry,
Co. Down, Northern Ireland BT34 1BY
T: 028 3083 4892
F: 028 3026 4444
www.ct1ltd.com



Peel Tec®

Paint just simply peels away!



Removes Paint from Multiple Surfaces SAFELY!



The Snag List® Eliminator


Simply spray Peel Tec onto the surface and within minutes it gets straight to work!



Peel Tec is simply brilliant when removing old varnish and wood stains.



Enormously versatile, Peel Tec works on almost all materials with the same efficiency!

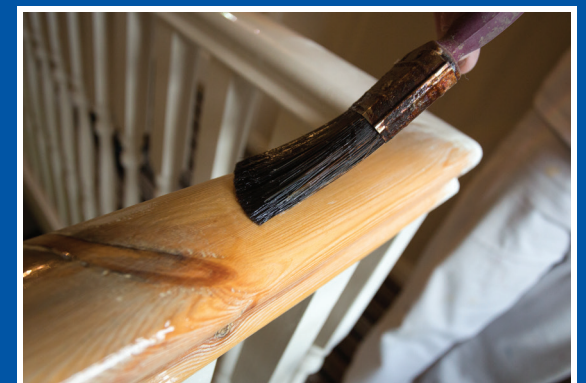

Peel Tec's unique formulation reduces labour considerably, even when removing multiple layers of paint.

For full audio visual demonstrations please visit our website at www.ct1ltd.com