

Fire Ribbon™ FIREBREAK [2016] (FR1200)

Index # 19, Rev-23 [4-Jul-2016], Page 1 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

Description

Burner is operated by battery powered thermostatic remote control with handset. The remote can adjust the flame in 8 steps from high to low and it is possible to select a room temperature and the handset will adjust the flame automatically. The fire has a 10Kw burner available for Natural Gas or LPG/Propane. The fire is supplied with a steel chamber including fixed gather (must be used) and a glass panel. The gather and glass panel must be used. The fire is designed as a complete fire assembly to allow easy installation. The front shelf is supplied in a single piece and is very heavy. This is a very large and powerful fireplace and requires a reliable and steady gas supply - ensure all pipe work is to the required standard before installing.

Enclosure Material Options: Stone enclosure in Black Granite or Limestone [others upon request]

Dimensions: See Page 2.

CE Approval: The fire is CE approved for the following gas categories.

- **NATURAL GAS:** Power Rating 10.0Kw [40p/hour]
 - I2H-G20-20mBar, I2E-G20-20mBar, I2E+-G20/G25-20/25mBar
- **LPG/PROPANE:** Power Rating 10.0Kw [xpp/hour]
 - I3P-G31-37mBar

Ventilation:

- a. This appliance requires room ventilation from outside (air vent).

Important Notes:

1. Fire is supplied as a complete package: Ribbon Burner, Remote Control, Steel Enclosure, Gather Unit and Stone.
2. The fire is fitted with safety devices inline with CE regulations.
3. The gather is supplied with fire – this must be used.
4. The fire has a small glass panel at the top of the enclosure, this is required, do not remove. If damaged, it must be replaced.
5. The front stone section is a “floating hearth” it is not supposed to be used as a shelf. Do not lean on or place heavy items on it.
6. The remote system is powered by batteries.
7. The fire is operated by a handset.
8. **PIPEWORK:** This is a very powerful fire. **Natural Gas requires 1.0m³/h, LPG/Propane requires 0.7m³/h.**
 - a. The gas pipe work is critical and must be able to supply a steady gas supply when the fire is on full power.
 - b. Insufficient gas will cause the appliance to shut down and become unreliable.
 - c. The gas pressure must be tested using the test point supplied within the fire, with the fire on full.
 - d. If the gas pressure is outside the required limits the pipe work will need upgrading – do this before installing!
9. **CHIMNEY:**
 - a. Flue liner – minimum is 180mm diameter by 3m length.
 - b. Chimney – minimum 7” diameter or class1 with 3m minimum length.
10. **Notes on Limestone Version** - Portuguese Limestone is a soft material which can contain high concentrations of fossils. The positioning and quantity of these fossils is totally random and is part of the natural beauty of this type of stone. It is advised to visit the showroom and see the display model if in doubt. Limestone is absorbent and is easily marked by liquids. We supply the stone un-sealed as most customers prefer this natural look. Limestone sealer is available from most DIY superstores. Due to the size of the flame it is likely that the limestone model will be marked by soot from the flame. This is unavoidable.

=====
CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.


Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

Fire Ribbon™ FIREBREAK [2016] (FR1200)

Index # 19, Rev-23 [4-Jul-2016], Page 2 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

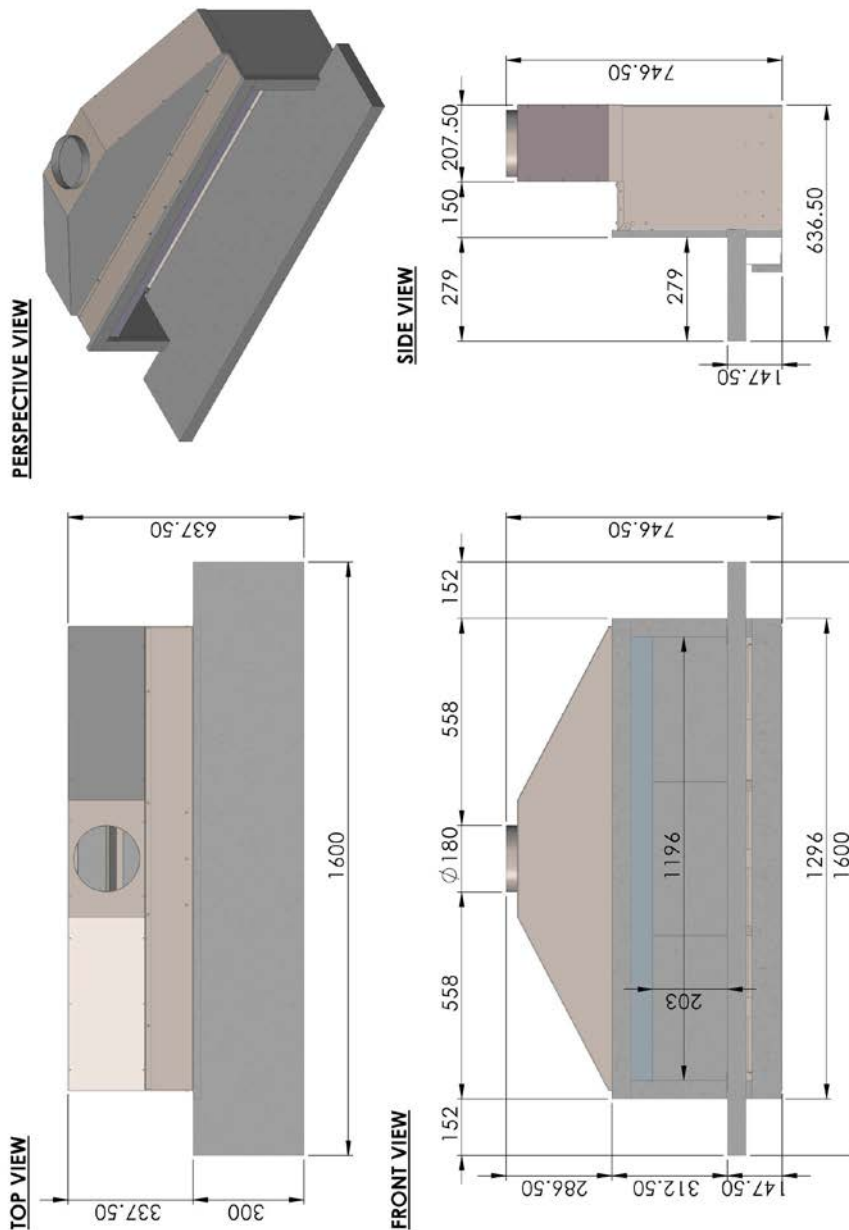

The complete assembly as shown in the image must be installed. The flue outlet must be sealed to the chimney or the flue liner.

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.