

RESPONSE

CUT

Soiling and Stain Resistant

Solution Absorption

Static Protection

Texture

Colour



Performance. Appearance. Durable

danfloor
An Ulster Group Company

RESPONSE

Response is a range available in both cut and loop pile designs offering a variety of options for commercial interiors. Made from the 100% sustainable yarn ECONYL®, the polyamide 6 fibre results in a carpet that has outstanding performance characteristics and is suitable for high traffic areas.



The finest carpet yarn

The ECONYL® yarn used to create the Response range is an important factor contributing to the integrity and resilience of the carpet and goes a long way in determining the overall performance of the product.

The ECONYL® fibres used to make the Response range results in a carpet designed to perform in the most demanding environments and is able to withstand high levels of traffic and heavy contact

along with intense commercial cleaning. The range falls into the highest of 3 commercial categories, class 33-heavy usage, which determines a carpets resistance to wear and change in appearance over time, resulting in a hardwearing, durable flooring solution.

Key features of ECONYL® include:

- Stain and soil resistance
- Enhanced texture and colour
- 100% sustainable and recyclable
- Solution dyed yarn
- Resilience to wear
- Colour fastness

Colour Fastness


The colours of the ECONYL® solution dyed yarn are created from individual nonphotosensitive and non-soluble pigments guaranteeing extreme light, water, shampoo and bleach fastness (ISO 105).

Stain and soil resistance


The special polymer of the ECONYL® yarn repels acid stains, minimising the chemical adhesion making your carpet easy to clean. In addition to this the unique tri-lobal filament cross section of the yarn also reduces soil adhesion, making soil removal easier and less visible.

Cleaning and Maintenance

The use of the ECONYL® yarn is recommended for any sector where carpet cleaning and disinfection is particularly aggressive. Using bleach based products on ECONYL® carpets will not result in loss of colour.

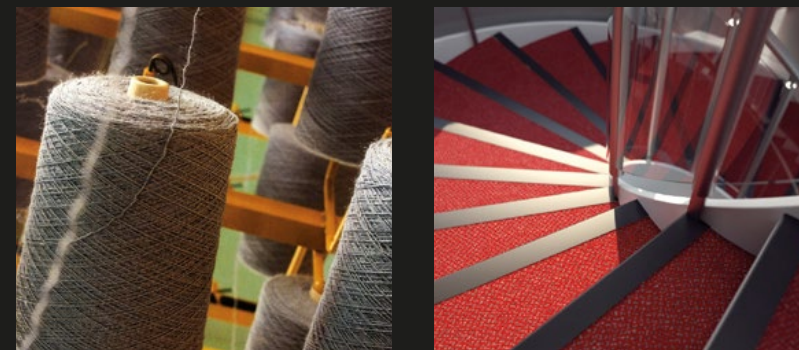

RESPONSE COLLECTION

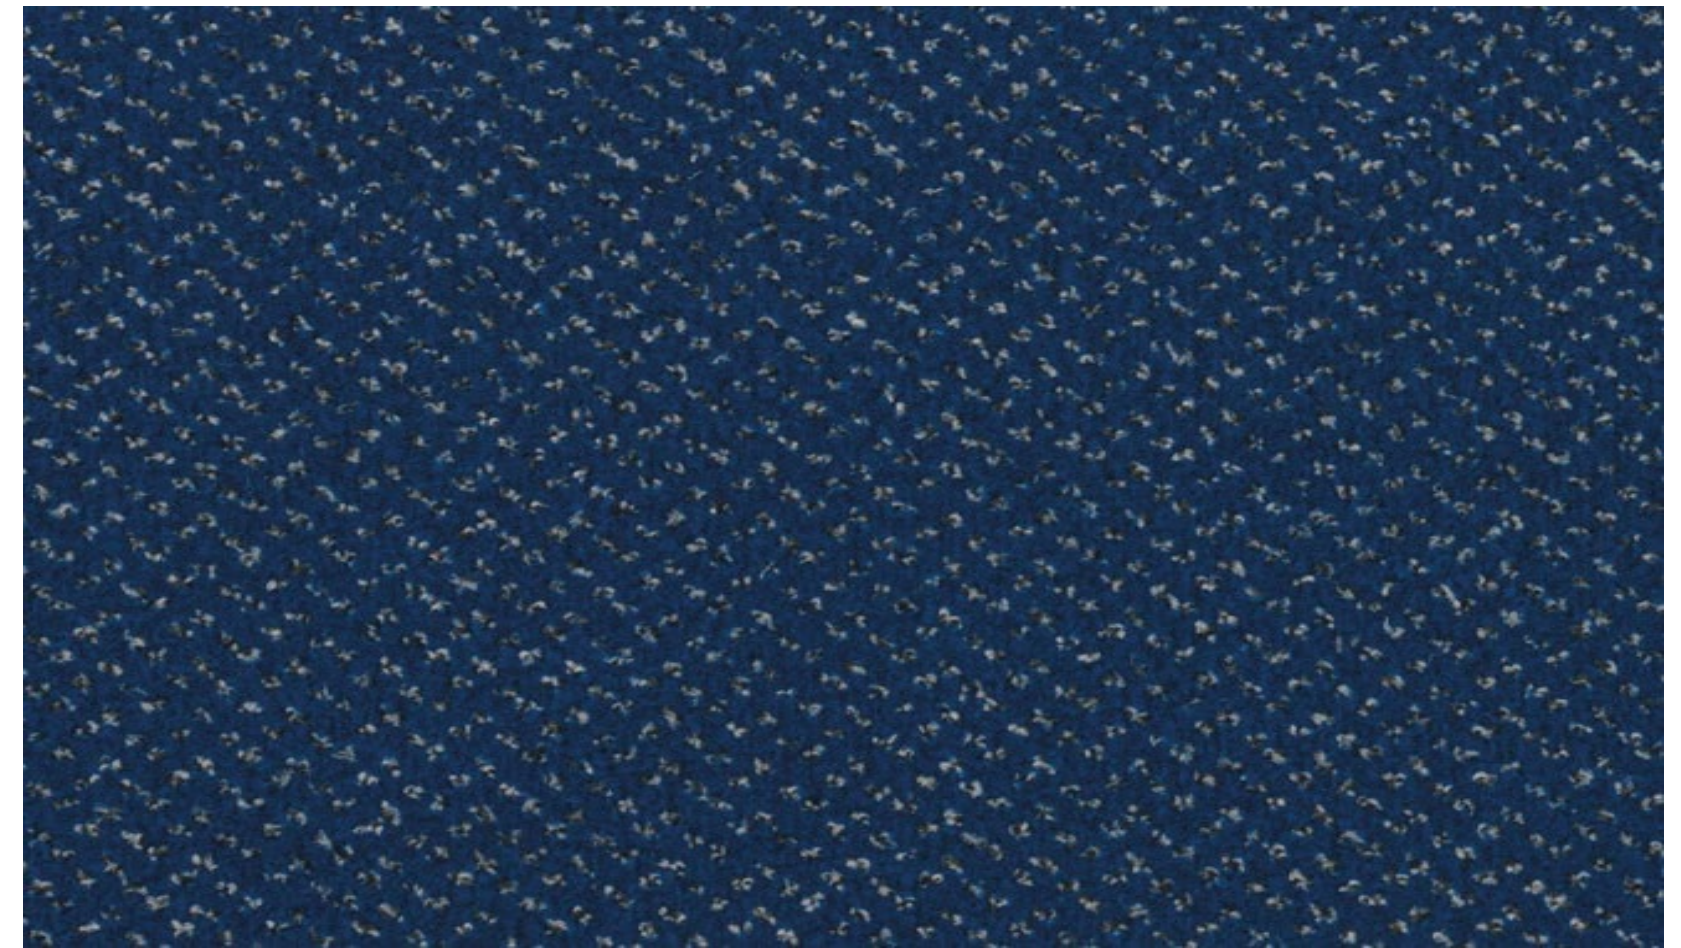

Response Cut

RC718 303



Response Loop

RL718 303

RESPONSE CUT PILE




RC718 301

LRV: 4.27



RC718 302

LRV: 4.48

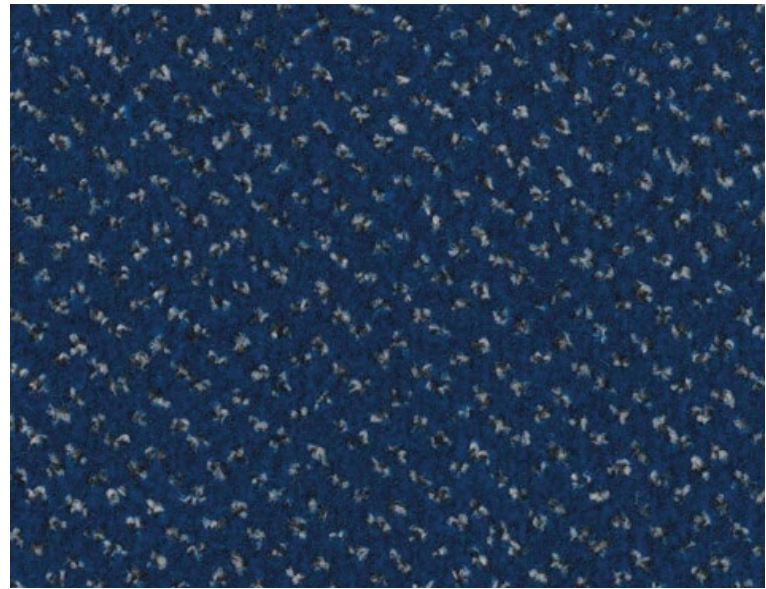


RC718 303

LRV: 4.99




RESPONSE CUT PILE

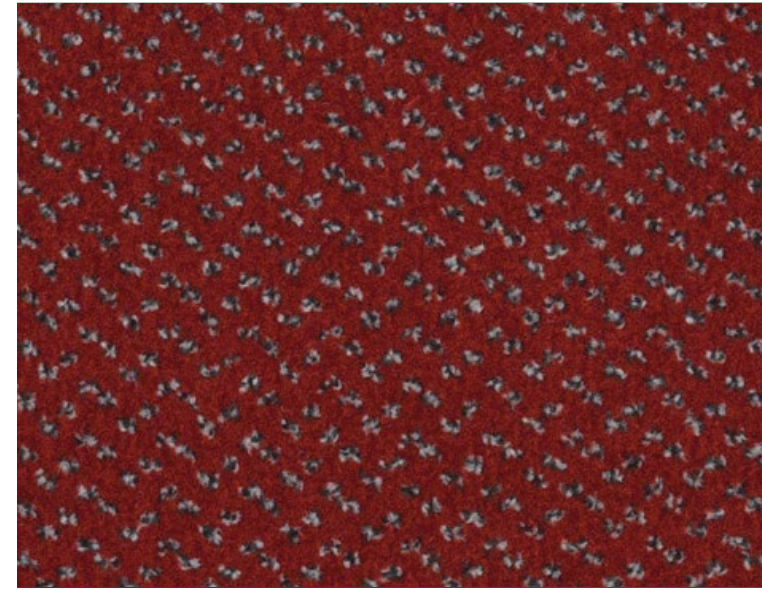


RC718 102

LRV: 6.38

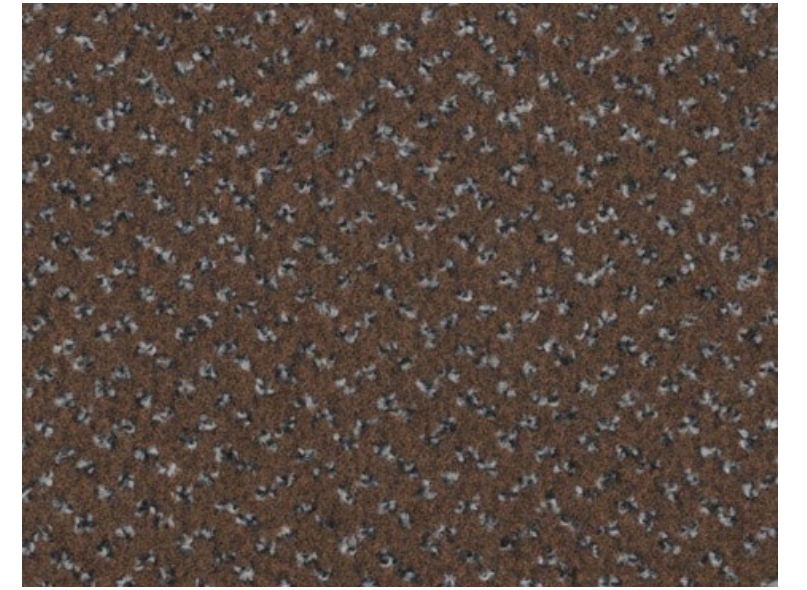

RC718 702

LRV: 8.10

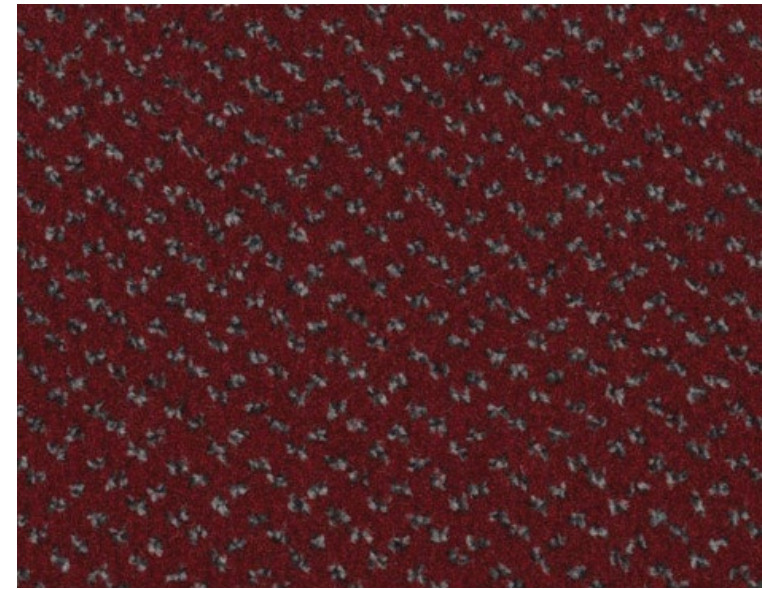


RC718 101

LRV: 4.76




RC718 201

LRV: 15.59

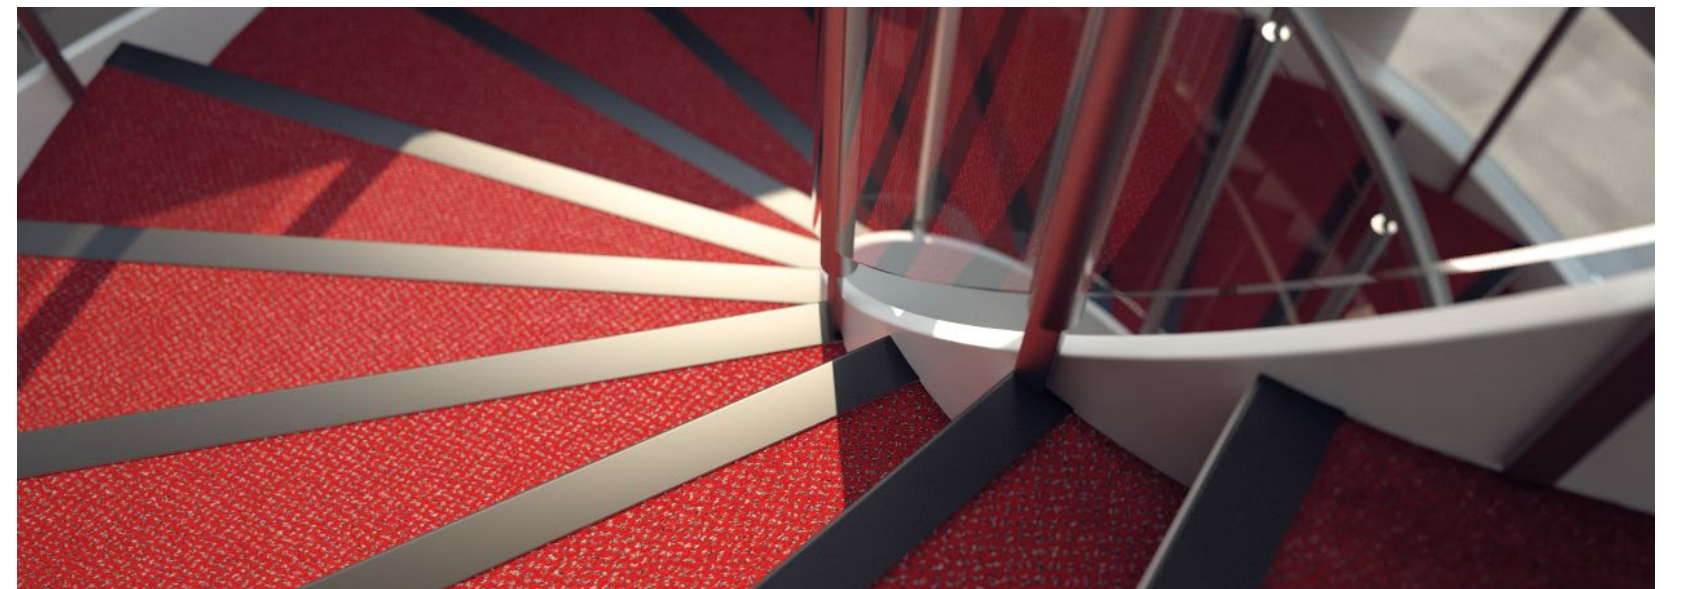

RESPONSE CUT PILE

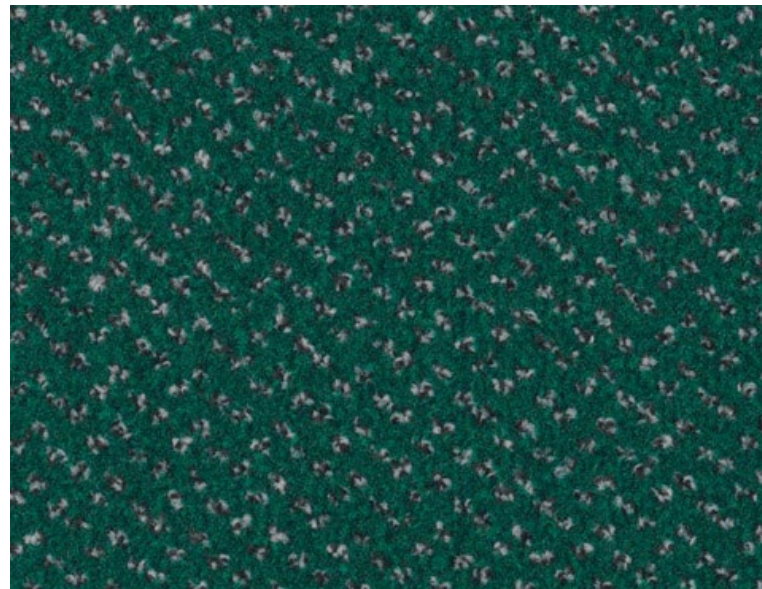


RC718 401

LRV: 6.58



RC718 504

LRV: 5.43

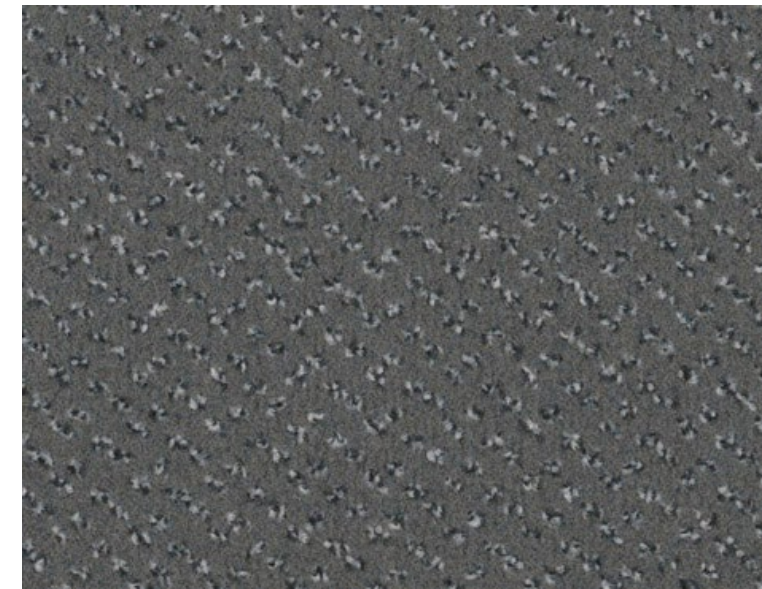

RC718 501

LRV: 9.23



RC718 701

LRV: 5.08



RC718 403

LRV: 11.40



RC718 904

LRV: 5.06



RC718 503

LRV: 10.57



RC718 901

LRV: 4.58



RC718 902

LRV: 3.63



RC718 502

LRV: 7.63



RC718 903

LRV: 3.94

RESPONSE CUT PILE

TECHNICAL SPECIFICATION	RESPONSE CUT	RESPONSE LOOP	STANDARD
Design Pattern Identification	RC718	RL718	
Method of Manufacture	Cut Pile Tufted	Loop Pile Tufted	DIN ISO 2424
Pile Fibre	Solution Dyed Nylon	Solution Dyed Nylon	
Yarn	Aquafil ECONYL®	Aquafil ECONYL®	
Gauge	1/10" Graphic Cut Pile	1/10" Graphic Loop Pile	DIN ISO 2424
Tuft Density	207,900 Mt. Sq.	218,000 Mt. Sq.	ISO 1763
Pile Height	3.60mm approx	3.20mm approx	ISO 1766
Primary Backing	PET 100% Recycled	PET 100% Recycled	DIN ISO 2424
Total Pile Weight	715gms Mt. Sq. approx	715gms Mt. Sq. approx	DIN ISO 2424
Total Product Weight	1900gms Mt. Sq. approx	2000gms Mt. Sq. approx	ISO 8543
Total Product Thickness	6.00mm approx	5.70mm approx	ISO 1765
Product Width	4.00 Mt.	4.00 Mt.	ISO 3018
Backing	Textile Backing	Textile Backing	DIN ISO 2424
PERFORMANCE TEST			
Castor Chair Suitability*	A - Continuous Use*	A - Continuous Use*	BS EN 1307
Euro Class Radiant Panel Fire Test	Cfl - s1	Cfl - s1	DIN IEC 1350-1
Electrostatic Properties	approx. ≤10/9 Ohm	approx. ≤10/9 Ohm	ISO 10965
Wear Classification	Commercial Heavy - (33)	Commercial Heavy - (33)	EN 1307
Thermal Resistance	0.05 m ² k/w	0.05 m ² k/w	BS 4745 (ISO 8302)
Reduction of Transmitted Impact Noise	24 dB	25 dB	ISO 10140
Acoustics - Measurement of Sound Absorption in a Reverberation Room	0.20 aw	0.20 aw	ISO 354
Colour Fastness Tests			
Light (1-8 Scale)	Min 6	Min 6	ISO 105 - B02
Rub Fastness			
Water Fastness(1-5 Scale)	Min 4	Min 4	DIN EN ISO 105 E01
Resistance to Abrasion (1-5 Scale)	Min 3 - 4	Min 3 - 4	DIN EN ISO 105 X12

* as from fitted area of > 6 Sq Mts

Colour Selection

Although the Response range is designed to minimise visual soiling, it is strongly recommended that care be taken in choosing colours to suit particular locations. Medium to dark coloured carpets disguise soiling more effectively than plain, light shades and should therefore be considered for high traffic areas such as corridors.

Tolerances


Product specifications are derived from averages in yarn, fibre, temperature and colour which may vary within the standard industry tolerances. Performance is not affected by such variations.

Care & Maintenance

Carpet should be cleaned daily with a vacuum cleaner, preferably one with a beater action. Spillages should be taken up promptly and surface stains removed by an appropriate method as soon as possible. Instructions for the maintenance of carpets are available from danfloor upon request or can be downloaded from www.danfloor.co.uk. It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Chair pads are required under roller castor chairs to prevent accelerated wear and to preserve appearance retention. Please note that loop pile carpets may be damaged if not adequately protected from sharp objects.

Installation

Prior to cutting and installation all carpets should be unrolled and inspected to ensure all quality standards have been met. Approval should be sought with the client as to the location of all joins. Installation must be carried out by an approved carpet installer in accordance to BS5325:2001. A full Installation Guide, including recommended adhesives, can be downloaded from www.danfloor.co.uk

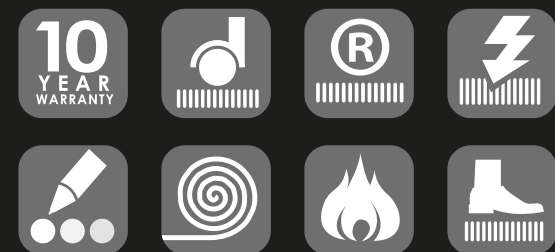

ECONYL®
ENDLESS POSSIBILITIES

danfloor
An Ulster Group Company

Innovative Carpet Solutions

danfloor Uk Ltd
106 Longmead Road, Emerald Park, Emersons Green
Bristol BS16 7FG, United Kingdom
T: 0333 014 3132, F: 0333 014 3134
E: info@danfloor.co.uk

Danfloor Denmark
danfloor a/s, Østerbro 9, DK-6933 Kibæk
T: +45 9699 1900, F: +45 9699 1999

www.danfloor.co.uk