
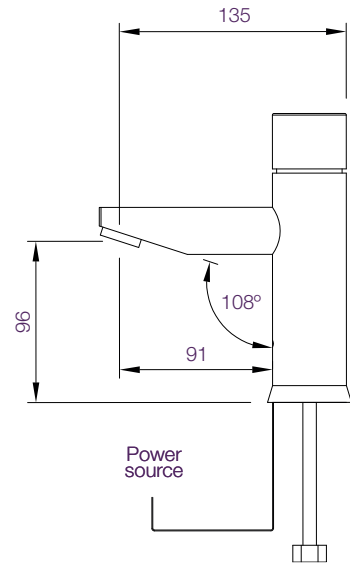


## Counter Mounted

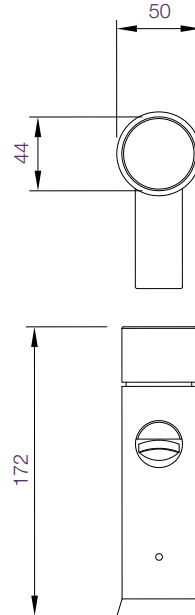

Taps

### DB 100 / DB 125 Dolphin Blue Infrared Tap

- Touch Free Tap – for ultimate hygiene – prevents cross contamination
- Quality polished chrome plated brass or lacquered nickel plated brass finishes available
- Water Supply: Single inlet cold or pre-mixed – a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications (for 2 inlet hot and cold feed see page 183)
- Flow rate – 3.8 litres/minute (other flow rates available to special order – please enquire)
- Interchangeable STD M22/24 Neoperl Aerator insert
- Tap settings can be adjusted manually or by using remote control (DB51 – see page 188)
- Mandatory Hygiene Flush feature can be specified to combat Legionella – please specify a time of ordering
- **WRAS approval pending**
- 2 year manufacturer's warranty
- Max water temperature 70°C
- Operating pressure 0.5–8.0 bar (7–116 PSI)
- Very low energy usage

#### Product Data

- H 172 x Ø 44 mm
- Projection 135mm
- Power Connections: tap male, power source female
- Counter hole Ø 28-34mm; Min-max counter thickness 2-27mm
- 3/8" BSP water supply connector
- Power options: Plug-in 9 volt transformers or 9 volt battery (with low battery warning) – for other power source options see pages 190-191

#### Product Codes

##### Polished chrome finish

- Powered by 6 x AAA / 9v PP3 battery **DB100C-STL**
- Powered by 9v plug in transformer **DB125C-STL**

##### Brushed nickel finish

##### (designed to match brushed stainless steel)

- Powered by 6 x AAA / 9v PP3 battery **DB100S-STL**
- Powered by 9v plug in transformer **DB125S-STL**

### Related items



**DB 200**  
page 178



**DBL 400**  
page 180



**WP 106**  
page 11



**WP 208R**  
page 12



**WP 112R**  
page 105



**BC 2006**  
page 159