versie 24/02/2012

# TECHNICAL DATA SHEET

Ventilation & Sun Control

| | |
|---|---|
| **TYPE** | **DUCOSLIDE LUXFRAME 40/40 60F** |
| **DESCRIPTION** | Permanent external solar shading system with sliding shutters. This system contains aluminium blades fixed in an aluminium frame. |

**EXECUTION**

| | Manual | Motorized |
|---|---|---|
| Single | X | X |
| Double | X | X |
| Double in front of each other | X | |
| Triple in front of each other | X | |
| Symmetric | X | X |
| Double Telescopic | X | X |
| Triple Telescopic | X | X |

| | |
|---|---|
| **BLADE TYPE** | 60F |
| **BLADE HEIGHT** | 51mm |
| **BLADE PITCH** | 80mm |
| **INCLINATION ANGLE** | 55° |
| **TYPE OF FRAME (LxH)** | 40mm x 40mm |
| **MAX. LENGTH OF FRAME** | 1598mm (L) x 3010mm (H) |
| **MAX. HEIGHT OF FRAME** | 500 mm (L) x 4046 mm (H) |
| **MAX. WEIGHT OF FRAME** | 60 kg |
| **MATERIAL FRAME** | Aluminium : Al Mg Si 0,5 |
| **SURFACE TREATMENT** | standard natural anodized (15- 20µm)<br>polyester powdercoated (60-80µm) |
| **COLOURS** | All RAL colours |

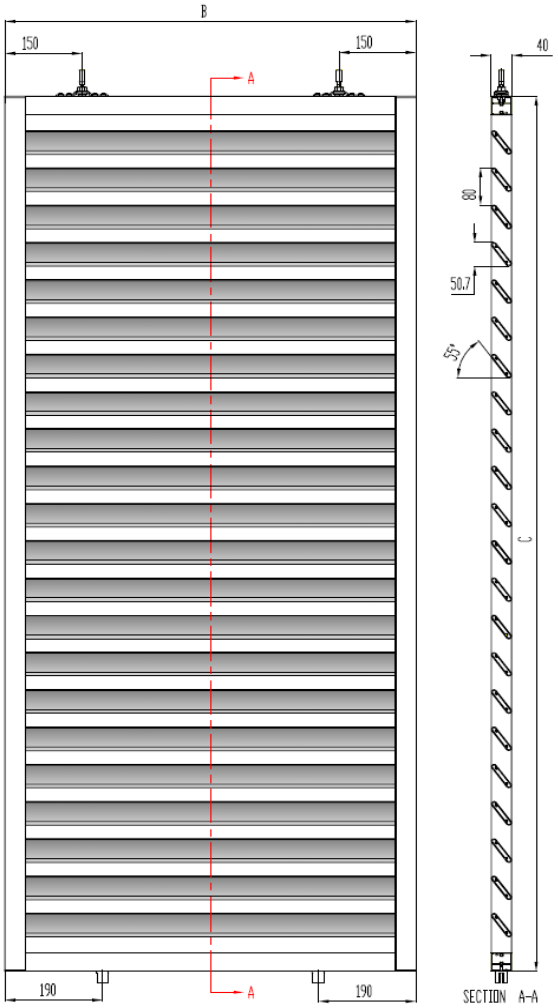


**B: Frame width**
**C: Frame height**