


TECHNICAL DATA SHEET

TYPE	DUCOSLIDE SLIMFRAME 5/80 Ellips 100																					
DESCRIPTION	Permanent external solar shading system with sliding shutters. This system contains aluminium blades fixed in an aluminium frame.																					
EXECUTION	<table border="1"> <thead> <tr> <th></th> <th>Manual</th> <th>Motorized</th> </tr> </thead> <tbody> <tr> <td>Single</td> <td>X</td> <td>X</td> </tr> <tr> <td>Double</td> <td>X</td> <td>X</td> </tr> <tr> <td>Double in front of each other</td> <td>X</td> <td></td> </tr> <tr> <td>Triple in front of each other</td> <td>X</td> <td></td> </tr> <tr> <td>Symmetric</td> <td>X</td> <td>X</td> </tr> <tr> <td>Telescopic double</td> <td>X</td> <td>X</td> </tr> </tbody> </table>		Manual	Motorized	Single	X	X	Double	X	X	Double in front of each other	X		Triple in front of each other	X		Symmetric	X	X	Telescopic double	X	X
	Manual	Motorized																				
Single	X	X																				
Double	X	X																				
Double in front of each other	X																					
Triple in front of each other	X																					
Symmetric	X	X																				
Telescopic double	X	X																				
BLADE TYPE	Ellips 100																					
BLADE HEIGHT	100mm																					
BLADE PITCH	140 mm																					
INCLINATION ANGLE	45°																					
TYPE OF FRAME (LxH)	80mmx5mm																					
MAX. LENGTH OF FRAME	L: 2345mm (H: 3450mm)																					
MAX. HEIGHT OF FRAME	H: 5045mm (L: 500mm)																					
MAX. WEIGHT OF FRAME	60 kg																					
MATERIAL FRAME	Aluminium : Al Mg Si 0,5																					
SURFACE TREATMENT	Standard natural anodized (15- 20µm) polyester powdercoated (60-80µm)																					
COLOURS	All RAL colours																					

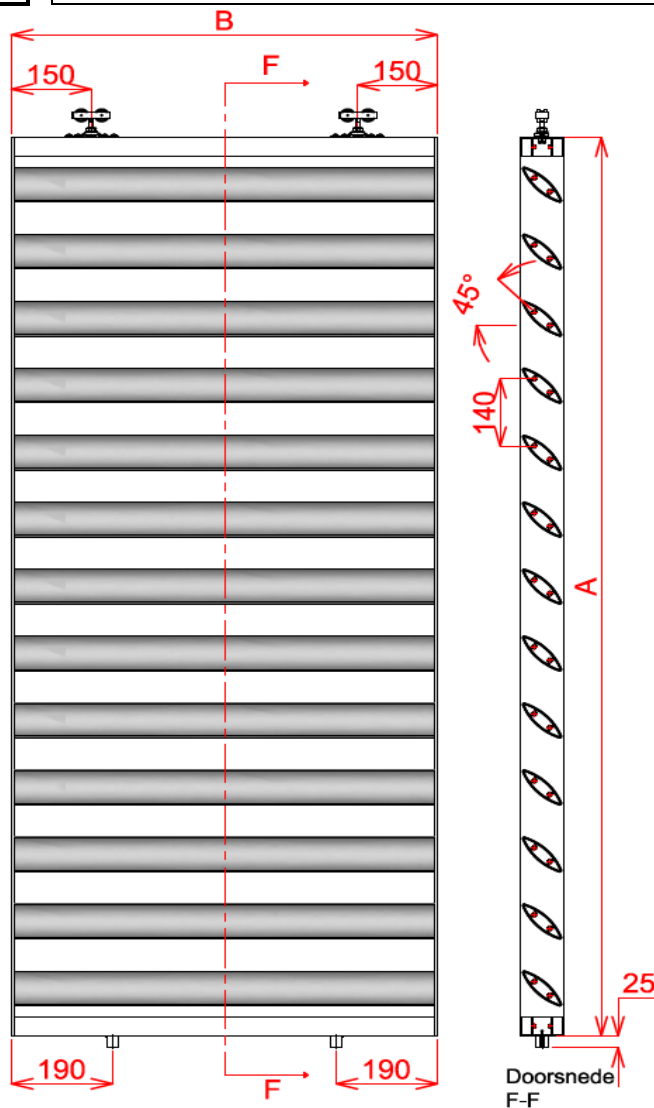

A: Frame height
B: Frame width