

ECOCEM

NEXT GENERATION CEMENT

CEM III/A 52.5L



Technical Data Sheet



Ecocem Next Generation Cement is a certified CEM III/A 52.5L cement supplied in 25kg bags. It is suitable for all uses including mortar, render, concrete and where specifications of EN 206-1 are required to produce stronger, more durable results with a lower carbon footprint. Ecocem Next Generation Cement is a specially formulated blend of traditional cement and Ground Granulated Blastfurnace Slag that results in a superior cement that can stand up to the toughest environment.

Ecocem Next Generation Cement is independently certified by the National Standards Authority of Ireland and is CE marked.







FEATURES

- Certified as 52.5L, the strongest cement available in bags
- Resistant to all forms of chemical attack
- Increased durability minimises repair requirements
- Reduces efflorescence
- Whiter, brighter colour
- Improved workability
- Up to 60% reduction in carbon footprint
- Guaranteed Irish product

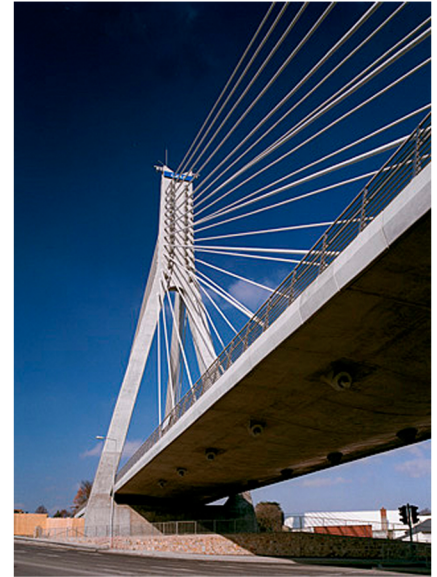
APPLICATIONS

Ecocem Next Generation Cement is suitable for use in all applications for high performance results. Its specially formulated blend can be used with all cement additives and admixtures when used in accordance with manufacturers' recommendations. The below mix designs are intended for guidance only. Users should carry out their own testing to ensure the right mix for their requirements. All proportions are based on volume and sufficient water should be added to achieve desired consistency. As with all applications care should be taken to prevent moisture loss and weather damage of finished work. Further information is available on request.

 <p>CONCRETE</p>	 <p>MORTAR</p>	 <p>SCREED</p>	 <p>PLASTER / RENDER</p>
<p>1 x Cement 2 x Concreting Sand 3 x Aggregate (20mm)</p>	<p>1 x Cement 4-5 Building Sand OR 1 x Cement 1 x Lime 4-5 x Building Sand</p>	<p>1 x Cement 3-5 x Concreting Sand</p>	<p>1 x Cement 3 x Plastering Sand OR 1 x Cement 1 x Lime 6 x Plastering Sand</p>

TECHNICAL DATA

PROPERTY	UNITS	REQUIREMENT	ECOCEM CEM III/A
Setting Time - Initial	Mins	≥ 45	270
Early Strength 2 Day	MPa	≥ 10	14
Standard Strength 28 Day	MPa	≥ 52.5	59.3
Colour	L-Value	-	77
Sulfate SO ₃	%	≤ 4	1.53
Chloride Cl	%	≤ 10	0.03
Insoluble Residue	%	≤ 5	0.38
Loss of Ignition	%	≤ 5	0.93



STORAGE

The performance of Ecocem cement can be adversely affected by unsuitable storage conditions. Bags should be stored in dry conditions raised off the ground to protect against damage. Bags should always be stacked in a stable manner.



CERTIFICATION

Ecocem has been rigorously tested in accordance with the EN 197-2 Cement- Part 2: Conformity evaluation and has been issued with an EC certificate of conformity by an EU Notified Body and carries the CE mark.



HEALTH AND SAFETY

Cement is classed as an irritant under the Chemicals (Hazard information and Packaging) Regulations. Suitable protective clothing must be worn at all times when handling cement. Keep out of reach of children. Cement contains Chromium (VI) which can cause an allergic reaction. For further information on Chromium (VI) or any other safety information please consult the Ecocem Cem III/A Material Health and Safety Sheet available to download from our website.

ADVICE AND INFORMATION

For further information contact:
Ecocem Ireland Ltd.
Block F1
East Point Office Park
Dublin 3

Tel: 01 678 1890

Email: info@ecocemcement.ie

www.ecocemcement.ie

