




Heritage SCHT

t: 01384 275800

f: 01384 275810

e: bs@eltafans.co.uk

visit: eltaselect.com

The Select Catalogue has a number of symbols and icons, designed to make the catalogue quicker and easier to use. An explanation of these are listed below:

Application Icons

Applications are now represented via a set of pictorial icons. The application icons key is featured on the facing page. Some applications have been grouped together, where the environmental conditions have similarities.

New Products

The icon to the right indicates a new addition to the Select product range. This will be displayed on the introductory page of each product and can also be seen on the contents page for each category.

NEW PRODUCT

Raptor SPA
Plate Mounted Axial Flow Fan

Overview
The Raptor SPA incorporates the BAT (Best Available Technology) FEZOWELD sickle bladed aerofl profiled impeller, with serrated trailing edges and vanes powered by the ultra reliable Ziehl-Abegg external rotor motor. The fan design, construction and finish provides a strong, durable and weatherproofed range, that boasts low noise and increased efficiency.

Quick Facts
✓ 9 standard sizes from 250mm to 710mm.
✓ Air volume flow rates of up to 6.27 m³/s.
✓ Static pressures of up to 298 Pa.
✓ Suitable for operating temperatures up to +70°C.
✓ Extensive stock range available.

Casing
The all metal fan casing and guard provide a long lasting and robust construction. The units have been constructed from mild steel and suitably treated to ensure full corrosion protection. The guard is powder coated in powder epoxy paint finish (RAL 5005).
Fan plates are powder coated polymer epoxy paint finish in powder epoxy (RAL 7002).

Motors
Motors are highly efficient, lightweight external rotor motors, insulated to Class F, with integral thermal overload protection.
Size 250-350 weatherproofed to IP44
Size 400-710 weatherproofed to IP54
All fans are suitable for use with a speed controller.
Electrical connection to the motor shall be provided by an IP55 terminal box fitted to a flying lead allowing the fan to be positioned conveniently to incoming electrical inputs.

Typical Applications
[Icons: Warehouse, Factory, Outdoor, etc.]

Impeller
Impellers are high quality Ziehl-Abegg Sickle Blade or FEZOWELD in pressure die cast aluminium or high performance composite material providing enhanced aerodynamic properties, low noise and energy efficiency. dynamically balanced to ISO 1940 Grade G2.5 and treated in black (RAL 9005).
Ziehl-Abegg Sickle Blade and FEZOWELD impellers provide significant noise reduction.

Quality Management
Units are fully designed and manufactured with procedures as defined in BS EN ISO 9001:2008.
All SPA units are also tested to BS EN ISO 14001:2007 (noise performance) and BS EN ISO 14001:2007 (sound performance).

More Information

Page
PERFORMANCE AND ELECTRICAL DATA
PERFORMANCE CURVES
SOUND DATA
DIMENSIONAL DATA
WIRING DATA
ACCESSORIES

CONTACT US: T: 01384 275800 F: 01384 275810 E: bs@elctafans.com VISIT: eltaselect.com

More Information Box

A more information box now also features on each introductory product page. This makes it easier to locate any further information you may require by displaying the page number to refer to, or directing you to the website - www.eltaselect.com.

2013

New legislation has driven change in the Elta Select range of products. Elta Fans have revolutionised both their new and existing product range to meet legislation directives, but also to incorporate the 'Best Available Technology'; creating a reliable efficient and powerful range of products. The products which conform to the 2013 legislation are indicated with the above logo. This logo is pictured both on the main product page and the category contents page.

2013

Catalogue Guide

Application Key

info

Each product has an indication of typical applications via a set of icons.
Every icon is displayed below, along with the definition of what it represents.



Sports Hall
Squash Courts
Gymnasium



Schools
Colleges



Shopping Mall



Shops
Retail Parks
Commercial



Kitchens



Factories
Industrial Units



Warehousing



Shower Rooms
Bathrooms
Toilets
Changing Rooms



Marine



Agriculture



Airports



Corrosive
Atmospheres



Banks



Hospitals



Hotels



Restaurants
Cafes
Cafeterias
Pubs



Theatres



Air Conditioning



Residential
Public Buildings
Entrance Halls



Underground
Stations



Libraries



Offices



Laundries
Utility Rooms



Temporary
Ventilation
Construction
Sites



Enclosed Car
Parks



Stairwell
Pressurisation



Workshops
Foundries
Welding Bays
Machine Shops
Spray Booths
Lift Motor Rooms



Marquees



Conference Halls



Cooling Towers
Stations
Boiler Houses
Heavy Industrial



Hot Gas
Situations



General HVAC

Heritage SCHAT

Roof Mounted Vertical Discharge Centrifugal Fan

roof



OVERVIEW

The Heritage SCHAT is a range of roof mounted centrifugal fans which is designed to handle clean, grease laden or contaminated air, whilst providing easy access for cleaning.

QUICK FACTS

- ✓ 7 standard sizes from 315mm to 630mm.
- ✓ Air volume flow rates of up to 4.57 m³/sec.
- ✓ Static pressures of up to 1000 Pa.
- ✓ Suitable for operating temperatures up to +50°C.
- ✓ Can be mounted at angles of up to 15°.

CASING

The all metal cowls shall provide a long lasting and robust construction, manufactured from pressed galvanised sheet steel and powder coated after forming.

The wind band shall incorporate quick-release toggle clamps to provide easy access for cleaning and maintenance.

All SCHAT units can be mounted at angles up to 15°.

IMPELLER

Aerodynamically designed backward curved centrifugal impellers constructed in aluminium or galvanised sheet steel.

Impellers are balanced to ISO 14694 Grade G6.3.

MOTORS

Motors are to be foot mounted totally enclosed metric type to IP55, with sealed for life bearings, standard industrial paint finish and Class F insulation to EN 60034-5, suitable for operating temperatures of up to +50°C.


Motors are to be wired via a weatherproofed cable to an IP55 protected terminal box.

QUALITY MANAGEMENT

Units are to be designed and manufactured with procedures as defined in BS EN ISO 9001:2008.

All SCHAT units are to be tested to ISO 5801:2007 (airside performance) and BS 848 Part 2:1985 (sound performance).

TYPICAL APPLICATIONS

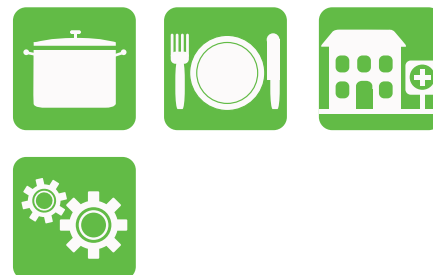

MORE INFORMATION	PAGE
PERFORMANCE AND ELECTRICAL DATA	277
PERFORMANCE CURVES	277
SOUND DATA	278
DIMENSIONAL DATA	278
WIRING DATA	279
ACCESSORIES	279

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

CONTACT US: T: 01384 275800

F: 01384 275810

E: bs@eltafans.co.uk

VISIT: eltaselect.com

4

Heritage SCHAT


Performance and Electrical Data

THREE Phase - 380V-415V / 50Hz


Product Code	Speed r/min	Airflow	Airflow m³/s @ Static Pressure Pa.													Motor Electrical Data		
			0	50	100	150	200	250	300	400	500	600	700	800	1000	FLC Amps	SC Amps	Input kW
SCHT315/4-3	1440	m³/s	0.53	0.50	0.45	0.41	0.35	0.28								7.20	0.37	47
SCHT315/6-3	960	m³/s	0.34	0.29	0.11											7.80	0.37	41
SCHT350/4-3	1440	m³/s	0.84	0.78	0.73	0.68	0.62	0.55	0.45							9.00	0.55	51
SCHT350/6-3	960	m³/s	0.53	0.43	0.31	0.18										7.80	0.37	42
SCHT400/4-3	1440	m³/s	1.12	1.08	1.03	0.97	0.91	0.84	0.76	0.52						9.00	0.55	54
SCHT400/6-3	960	m³/s	0.77	0.67	0.58	0.47										7.80	0.37	44
SCHT450/4-3	1440	m³/s	1.61	1.54	1.48	1.41	1.35	1.28	1.22	1.06	0.83					9.00	0.55	56
SCHT450/6-3	960	m³/s	1.05	0.98	0.90	0.78	0.63									7.80	0.37	46
SCHT500/4-3	1440	m³/s	2.24	2.18	2.11	2.04	1.97	1.89	1.81	1.63	1.42	1.14				17.4	1.10	60
SCHT500/6-3	960	m³/s	1.39	1.33	1.26	1.18	1.06	0.87								7.80	0.37	49
SCHT560/4-3	1440	m³/s	3.22	3.11	3.03	2.95	2.87	2.80	2.73	2.58	2.42	2.23	1.49			28.8	2.20	65
SCHT560/6-3	960	m³/s	2.14	2.04	1.92	1.79	1.65	1.49	1.29							10.8	0.55	53
SCHT630/4-3	1440	m³/s	4.57	4.48	4.39	4.29	4.20	4.10	4.00	3.80	3.58	3.36	2.83	2.07	2.25	48.2	4.00	70
SCHT630/6-3	960	m³/s	2.80	2.73	2.65	2.56	2.46	2.34	2.19	1.72						20.4	1.10	57

Performance Curves

THREE Phase - 4 Pole

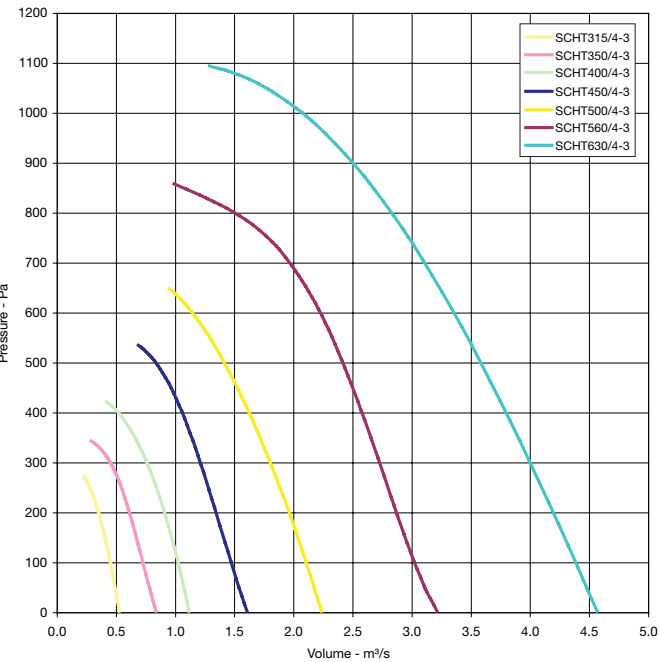

THREE Phase - 6 Pole

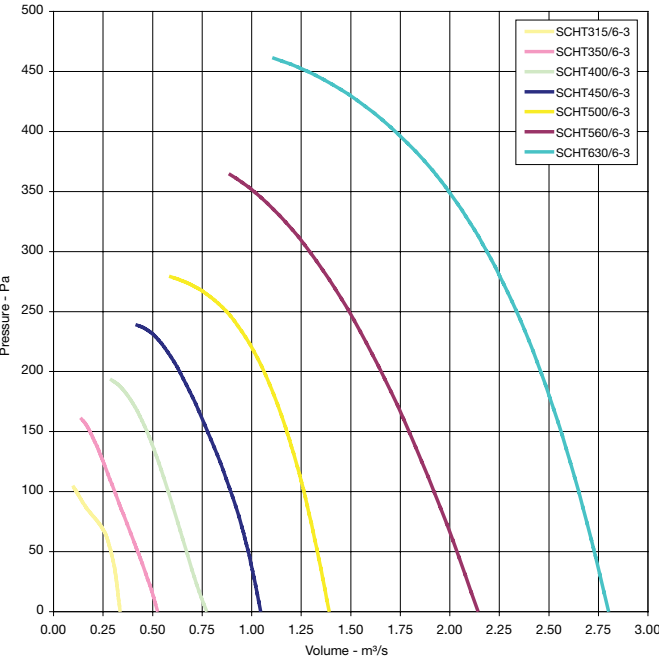

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Heritage SCHAT

Sound Data

THREE Phase - 380V-415V / 50Hz


Product Code	Sound Power Level dBW @ Octave Band Hz								dBA @ 3m
	63Hz	125Hz	250Hz	500Hz	1k Hz	2k Hz	4k Hz	8k Hz	
SCHT315/4-3	81	77	69	66	58	58	56	50	47
SCHT315/6-3	76	68	64	60	54	54	48	42	41
SCHT350/4-3	79	77	73	70	61	63	62	52	51
SCHT350/6-3	76	68	65	62	57	51	46	43	42
SCHT400/4-3	82	80	75	72	65	66	66	59	54
SCHT400/6-3	77	72	66	63	58	54	51	47	44
SCHT450/4-3	84	82	77	74	68	69	69	65	56
SCHT450/6-3	77	76	67	64	59	57	55	51	46
SCHT500/4-3	87	87	82	76	73	73	73	70	60
SCHT500/6-3	80	79	72	66	62	60	58	56	49
SCHT560/4-3	91	92	88	79	78	77	77	75	65
SCHT560/6-3	83	83	77	69	66	64	62	61	53
SCHT630/4-3	94	98	94	82	83	81	82	80	70
SCHT630/6-3	86	87	82	72	70	68	66	66	57

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2: 1985.

The Sound Power Level Spectra are in dB re-1pW.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20μPa and is presented for comparative purposes only.

Dimensional Data

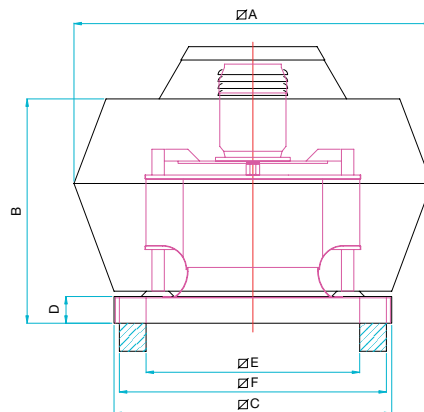

Product Code	A	B	C	D	E	F	Weight kg	
							4 Pole	6 Pole
SCHT315	520	310	430	50	310	410	16	
SCHT350	665	420	520	50	400	500	26	
SCHT400	665	420	520	50	400	500		
SCHT450	900	540	740	60	620	720	49	
SCHT500	900	540	740	60	620	720	57	51
SCHT560	900	540	740	60	620	720	65	56
SCHT630	1160	665	830	60	710	810	97	78

All dimensions are shown in mm.

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

CONTACT US: T: 01384 275800

F: 01384 275810

E: bs@eltafans.co.uk

VISIT: eltaselect.com

6

Heritage SCHAT

Wiring Data

Please see our Wiring Diagrams download on www.eltaselect.com for more information.

THREE Phase - 380V-415V / 50Hz

Product Code	Wiring Diagram No.
SCHT315/4-3	152-600
SCHT315/6-3	152-600
SCHT350/4-3	152-600
SCHT350/6-3	152-600
SCHT400/4-3	152-600
SCHT400/6-3	152-600
SCHT450/4-3	152-600
SCHT450/6-3	152-600
SCHT500/4-3	152-600
SCHT500/6-3	152-600
SCHT560/4-3	152-600
SCHT560/6-3	152-600
SCHT630/4-3	152-601
SCHT630/6-3	152-600

Accessories

Please see our Accessories download on www.eltaselect.com for more information.

THREE Phase - 380V-415V / 50Hz

Product Code	Inverter Controller 1PH-3PH IP55	Inverter Controller 1PH-3PH IP20	Inverter Controller 3PH-3PH IP55	Inverter Controller 3PH-3PH IP20
SCHT315/4-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT315/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT350/4-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT350/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT400/4-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT400/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT450/4-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT450/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT500/4-3	149-ODE-2-12151-1KB1S	149-ODE-2-12150-1KB12	149-ODE-2-14150-3KA1S	149-ODE-2-14150-3KA12
SCHT500/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT560/4-3	149-ODE-2-22220-1KB4S	149-ODE-2-22220-1KB42	149-ODE-2-24220-3KA4S	149-ODE-2-24220-3KA42
SCHT560/6-3	149-ODE-2-12075-1KB1S	149-ODE-2-12075-1KB12	149-ODE-2-14075-3KA1S	149-ODE-2-14075-3KA12
SCHT630/4-3	-	-	149-ODE-2-24400-3KA4S	149-ODE-2-24400-3KA42
SCHT630/6-3	149-ODE-2-12151-1KB1S	149-ODE-2-12150-1KB12	149-ODE-2-14150-3KA1S	149-ODE-2-14150-3KA12

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.



BUILDING SERVICES

Tel: +44 (0) 1384 275800
Fax: +44 (0) 1384 275810
e-mail: bs@eltafans.co.uk

46 Third Avenue
Pensnett Trading Estate
Kingswinford, West Midlands
DY6 7US, United Kingdom

APPLIED TECHNOLOGY

Tel: +44 (0) 1489 566500
Fax: +44 (0) 1489 566555
e-mail: at@eltafans.co.uk

17 Barnes Wallis Road
Segnesworth East Industrial Estate
Fareham, Hampshire
PO15 5ST, United Kingdom

EXPORT

Tel: +44 (0) 1489 566500
Fax: +44 (0) 1489 566555
e-mail: export@eltafans.co.uk

17 Barnes Wallis Road
Segnesworth East Industrial Estate
Fareham, Hampshire
PO15 5ST, United Kingdom

www.eltafans.com



BS EN ISO 9001:2008
FM 556465



A member of
HEVAC ASSOCIATION



PATRONS

A member of

ELTA
GROUP LIMITED