

# Technical Specifications

## Hyperion® Pro-Grip Aluminium Decking

Beautifully engineered and non-combustible aluminium deck boards are perfect for both residential and commercial settings. 145 Pro-Grip boards are highly slip resistant and easily installed with a simple hidden clip system.

### Length

Up to 6m

### Profile

145 x 21 mm

### Material

T6-6063 Aluminium


The data provided in EnviroBuild technical specifications are correct at the time of publication. EnviroBuild is continuously looking to improve existing products and increase transparency through further tests, meaning some information may change. EnviroBuild reserves the right to update Technical Specifications as and when we become aware of any changes to the data.

### Company Number

09662640

### Registered Office

29 Pear Tree Street,  
London, EC1V 3AG

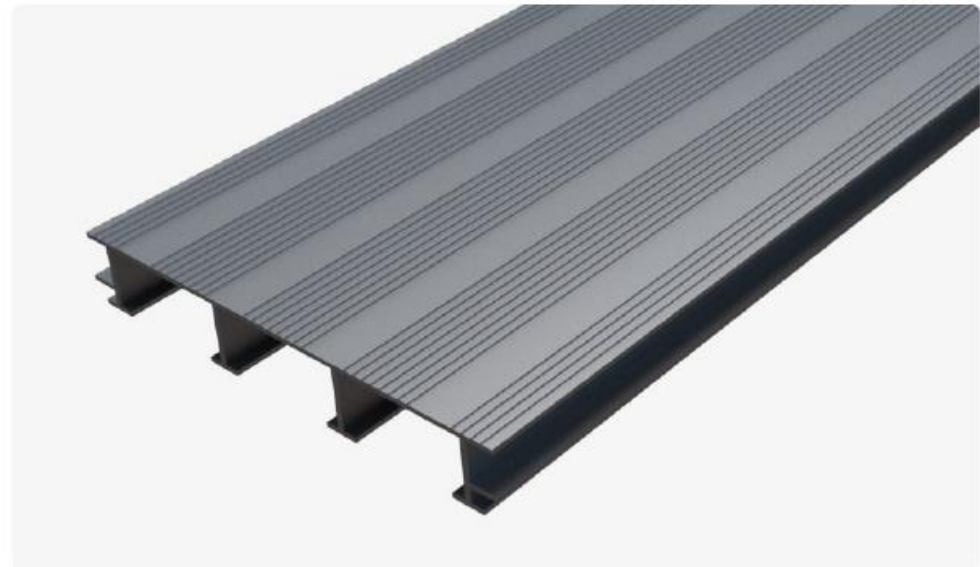

Sepia Brown  
8014



Grey Brown  
8019



Dusty Grey  
7037



Anthracite Grey  
7016

# Hyperion® Pro-Grip Deck Board Technical Data

## Main Properties

Property	Attribute
Dimensions (mm) WxHxL	145 x 21 x 3600 (stock length) Bespoke lengths available up to 6m
Material	6063 T6 Aluminium Interpon PE powder coating
Finish	Textured Qualicoat 1 powder coating
Weight (Kg) Including insert piece	8.55 kg/m <sup>2</sup>
Colours	7016 Anthracite Grey, 8019 Grey Brown, 8014 Sepia Brown, 7037 Dusty Grey (stock colour) Any RAL colour available
Fixtures	6mm Hidden Fasteners
Warranty	30 years
Expected Lifespan	At least 60 years
Reaction to Fire EN 13501-1	A2 s1 d0 A2 <sub>fl</sub> s1
Pendulum Test Slip Resistance BS EB 14231	Dry: 68 Wet:46 – Low slip potential  Wet (0 to profile): 32 Wet (45 to profile): 42 Wet (90 to profile): 64
Micro Roughness Slip Resistance	Rz: 25 µm – Low slip potential
Maximum Span (mm) BS 8579	650
Drainage	N/A

## Span Guide

